

SHALLOW DEPTH BASE MODEL SANDWICH UNIT

MODEL: RA68SN12
Natural Refrigerant R-290 Model

68” Shallow Depth Base Model Sandwich Unit with Solid Doors

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.



Options and Accessories	
(upcharge and lead times may apply)	
Stainless steel interior	Condensing unit left (standard on right)
Stainless steel back	Door & drawer locks
Stainless steel shelves	Pan Slides
Additional epoxy coated steel shelves	Front Breathing
Overshelves (single or double)	Adjustable legs
Drawer in lieu of door section above the condensing unit*	
Drawers in lieu of doors (consult factory)**	

Consult factory for other model configurations, options and accessories.

*Drawer section above condensing unit holds (4) 6 x 6 2/3 x 6 pan.

TWO TIER (larger section): (1) 12x20x6 pans per drawer

TWO NARROW: (4) 6 x 6 2/3 x 6 pan per drawer



Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM	
Performance rated refrigeration system	
Natural Refrigerant R-290 Model	
Unique forced air design utilizes fans (approx. every 12”) across the entire back of unit for even distribution of cold	
Automatic, hot gas condensate evaporator	
Non-corrosive, plasticized fin evaporator coil	
Easily serviceable, slide out condensing unit	
Expansion valve system	
CABINET ARCHITECTURE	
2” non-CFC polyurethane foam insulation	
Smooth, polished chrome door handles	
Spring loaded, self closing doors	
Magnetic snap in Santoprene™ door gaskets	
Heavy duty, epoxy coated steel shelf	
Completely enclosed, vented and removable rear and side grills	
5” casters	

MODEL FEATURES
Electronic control, off cycle defrost
Refrigerated section with door above the condensing unit
Field rehingeable doors

¹ R-290 refrigerant meets all federal and state regulatory requirements.

NOTE: Models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity	17.6 cu. ft. (498 cu l)
Width, Overall	68 inches (1727 mm)
Depth, Overall (including handles & bumpers)	30 inches (764 mm)
Height, Overall (including 5” casters)	42 inches (1067 mm)
Shelf Area	7.84 Sq ft. (0.7 sq m)
Number of Shelves	4
Number of Doors	Full 2 Half 1
Interior Depth	24 inches (610 mm)
Interior Height	26 inches (660 mm)
Interior Height (above condenser)	12.5 inches (318 mm)
Interior Width	64 inches (1626 mm)

REFRIGERANT DATA	
Condensing Unit Size	1/3+ H.P.
Capacity	2610 (BTU per hour) *

ELECTRICAL DATA	
Voltage (International)	115-60-1 (220-50-1)
Total Amps (International)	5.8 (3.9)
Defrost Amps	
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA	
Weight (pounds)	390 lbs. 177 kg)
Height - Crated	43.75 in. (1111 mm)
Width - Crated	70 in. (1778 mm)
Depth - Crated	47 in. (1194 mm)

DRAWER PAN CONFIGURATIONS	
TWO TIER (larger section): (1) 12x20x6 pans per drawer	
TWO NARROW: (4) 6 x 6 2/3 x 6 pan per drawer	

* Rating @ +20°F evaporator, 120°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




www.continentalrefrigerator.com

Equipped with one NEMA-5-15P Plug (varies by country)

Intertek

© Copyright 2023. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

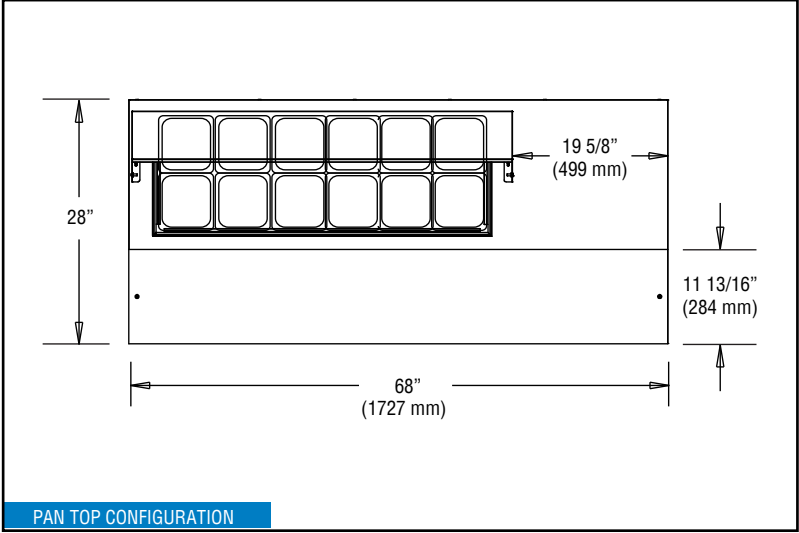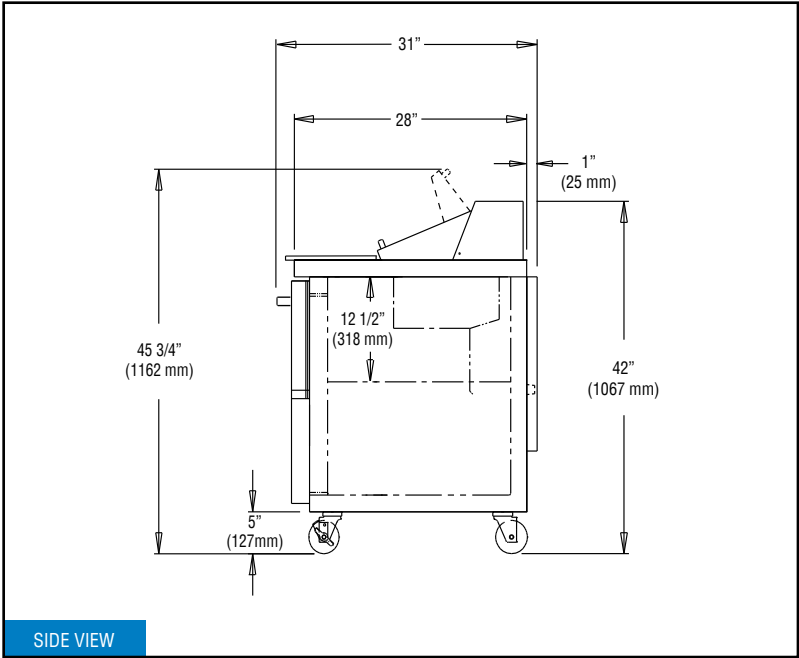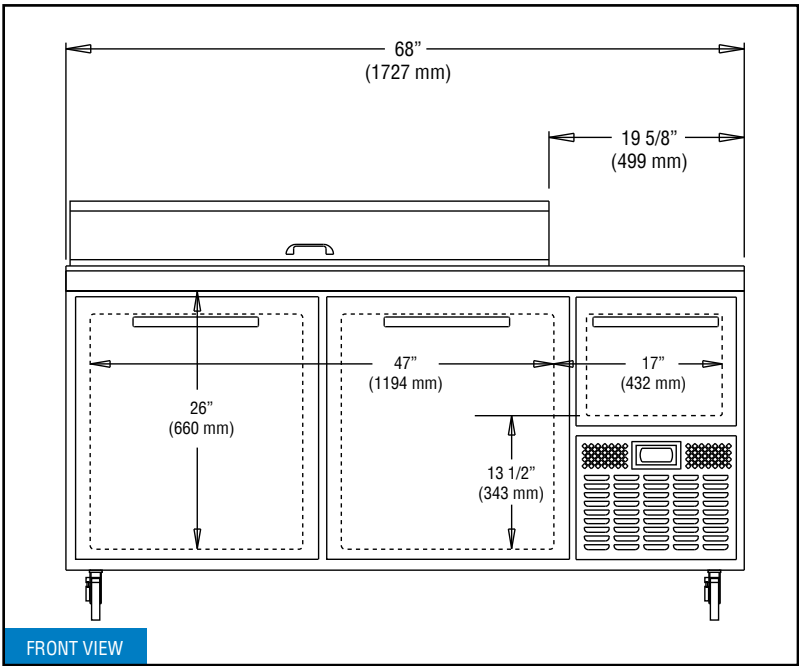

Due to our continued efforts in developing innovative products, specifications subject to change without notice.