

VISION II

Deli/Pastry/Beverage + Ice Cream Cakes/ Frozen Novelty Dual Temperature Showcases

STANDARD FEATURES

Dual temp: all in one low and medium temperature
Triple pane glass on all sides
Tempered glass shelving
No defrost shut down requirement for low temp
Dixell digital controller
LED lighting
Lockable casters
Cases ship standard silver finish
Available lengths: 26"L and 34"L

OPTIONS

Front and back access doors
Custom color finish or stainless steel base
Adjustable legs



VISION II DUAL TEMPERATURE									
TECHNICAL FEATURES		Single Door				Double Doors (Front & Back)			
		VII6314 H60	VII6314 H76	VII8314 H60	VII8314 H76	VII6314D H60	VII6314D H76	VII8314D H60	VII8314D H76
External Dimensions (L-D-H)	Inches	26" - 25 1/2" - 60"	26" - 25 1/2" - 76"	34" - 25 1/2" - 60"	34" - 25 1/2" - 76"	26" - 27 3/4" - 60"	26" - 27 3/4" - 76"	34" - 27 3/4" - 60"	34" - 27 3/4" - 76"
Inches-MM	MM	660 - 647 - 1524	660 - 647 - 1930	863 - 647 - 1524	863 - 647 - 1930	660 - 647 - 1524	660 - 647 - 1930	863 - 704 - 1524	863 - 704 - 1930
Crated Dimensions (L-D-H)	Inches	36" - 32" - 67"	36" - 32" - 80"	40" - 32" - 67"	40" - 32" - 80"	36" - 33" - 67"	36" - 33" - 80"	40" - 33" - 67"	40" - 33" - 80"
Inches-MM	MM	914 - 812 - 1701	914 - 812 - 2032	1016 - 812 - 1701	1016 - 812 - 2032	914 - 838 - 1701	914 - 838 - 2032	1016 - 838 - 1701	1016 - 838 - 2032
Refrigeration	Type	R404A	R404A	R404A	R404A	R404A	R404A	R404A	R404A
Operating Temperature	°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F
Compressor	Nr./Type	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic
BTU'S @ -25°F Evap Temperature	BTU'S	4200 BTU'S	4200 BTU'S	4400 BTU'S	4400 BTU'S	4200 BTU'S	4200 BTU'S	4400 BTU'S	4400 BTU'S
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60
Power Consumption	(A)	8A	8A	9A	9A	9A	9A	10A	10A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	F°/H.R.	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%
Net Weights	Kg/Lb	217Kgs / 435Lbs	257Kgs / 515Lbs	242Kgs / 485Lbs	282Kgs / 565Lbs	254Kgs / 508Lbs	294Kgs / 588Lbs	284Kgs / 568Lbs	324Kgs / 648Lbs
Crated Weights	Kg/Lb	245Kgs / 490Lbs	285Kgs / 570Lbs	270Kgs / 540Lbs	310Kgs / 620Lbs	265Kgs / 530Lbs	305Kgs / 610Lbs	302Kgs / 605Lbs	342Kgs / 685Lbs

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




VISION II


Deli/Pastry/Beverage + Ice Cream Cakes/ Frozen Novelty Dual Temperature Showcases

SINGLE DOOR

VII6314 H60 & VII8314 H60

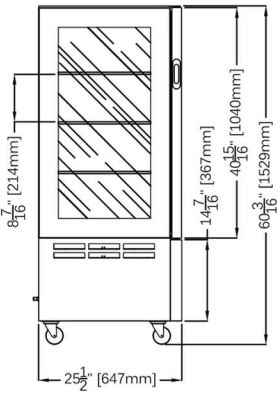


VII6314 H76 & VII8314 H76

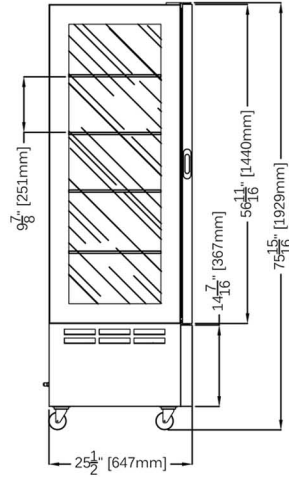


DOUBLE DOORS

VII6314D H60 & VII8314D H60

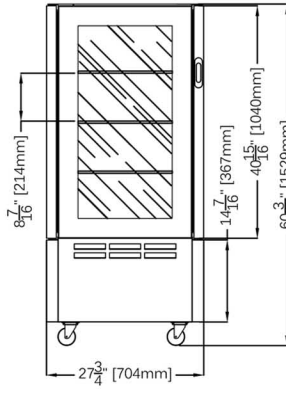


VII6314D H76 & VII8314D H76

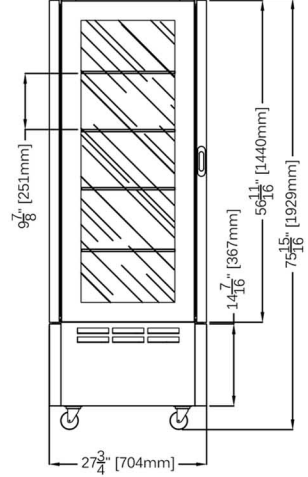


PLAN VIEWS:

SINGLE DOOR

VII6314 H60/H76




VII8314 H60/H76




DOUBLE DOORS

VII6314D H60/H76




VII8314D H60/H76

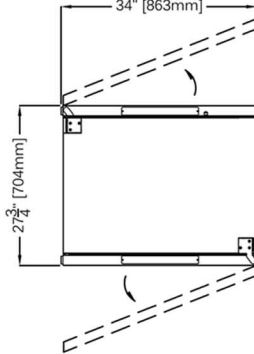


REAR ELEVATIONS:


VII6314 H60




VII8314 H60



VII6314 H76

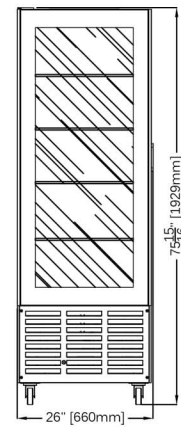


VII8314 H76

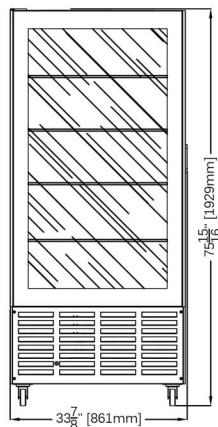


FRONT ELEVATIONS:


VII6314 H60




VII8314 H60



VII6314 H76

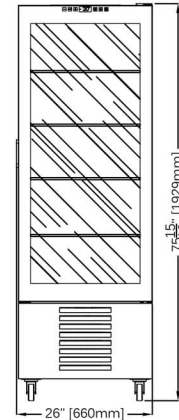

VII8314 H76

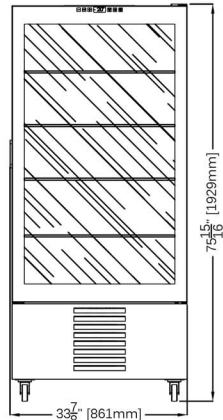

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

