

TRAY DRYING RACK

Item Number

DXIDTDR3



Application

The tray drying rack is ideal for drying trays without contact, allowing air to circulate freely for faster drying.

Construction

Shelf frames are constructed of 1.5" round corner tube (.070" wall) and 1.5" x 2" tube (.070" wall) welded to four heavy duty extruded aluminum collars which accommodates the post uprights. A stainless steel set screw is provided in each collar to lock the shelf at the desired height on the uprights. This unit has 1.5" spacing (40 slots) per shelf.

Uprights are extruded aluminum pipe with an outside diameter of 1.3125" and a wall thickness of .15". Each post is marked in 2" increments and fitted with a plastic cap in each end. Rack shall be mounted on four 5" non-marking casters.

For freight savings this unit ships "knocked-down" and is easy to assemble.


Warranty

One year parts and labor.

DINEX[®]

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

TRAY DRYING RACK

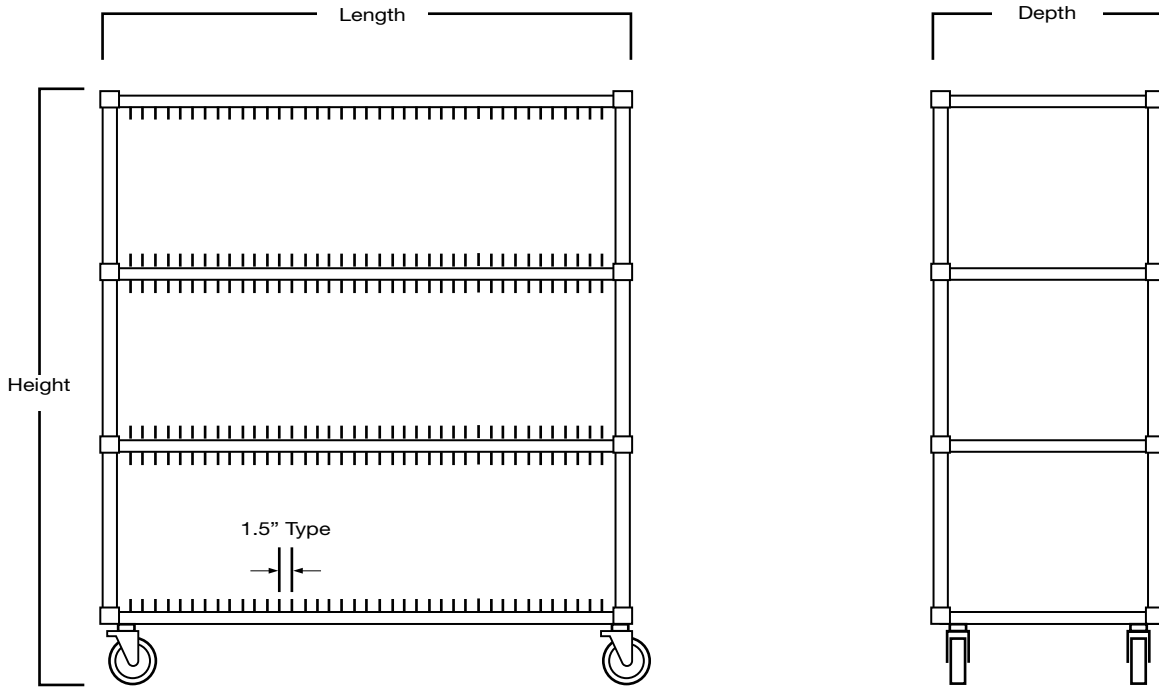

Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	CASTERS	NUMBER OF SHELVES	SHIP WEIGHT	SHIP CUBE
DXIDTDR3	IDTDR/3	63.75" (162CM)	28" (71.1cm)	74.5" (189CM)	5"	3	277 lb. (125.8kg)	87.1



Please confirm that you have the most current specification sheet by visiting www.dinex.com.
 Dinex® reserves the right to change specifications and product design without notice.
 Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

DINEX®

Building 2, Suite 106
 628 Hebron Avenue
 Glastonbury, CT 06033
 800.523.9752 Fax: 860.652.3135
www.dinex.com