DISPLAY REFRIGERATOR

Model: 1RSNGDHD

Natural Refrigerant R-290 Model

1-Section Display Reach-In Refrigerator with Half Hinged Glass Door - Shallow Depth

1RSNGDHD - Stainless steel front, aluminum end panels and interior

1RSNSAGDHD - Stainless steel exterior, aluminum interior

1RSNSSGDHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

(
Stainless steel case back	Pan slide assemblies
Additional epoxy coated steel shelves	Wine rack
Chrome or stainless steel shelves	Adjustable legs
Heavy duty pilaster strips	Solid door (consult factory)
Rehinging of door (consult factory)	Special electrical req. (consult factory)
Full door	Standard depth (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Locations	
Location:	
Item No:	Quantity:
item No.	quantity.

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass doors

Chrome plated handles

Cam action, lift-off hinges

Self-closing doors

Magnetic snap in door gaskets

Cylinder lock in door in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Off cycle defrost

Electronic controller with digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	16 (453 cu I)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handles)	29 ½ (743 mm)
Depth (inches) (less doors)	25 % (657 mm)
Depth (inches) (doors open 90°)	49 3/8 (1254 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	2
Number of Shelves	4

REFRIGERANT DATA

Shelf Area (square feet)

Condensing Unit Size (H.P.)	1/4+
Capacity (BTU per hour)*	1940

20.4 (1.9 sq m)

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	6.5 (4.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	31 % (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	315 (143 kg)
Weight SS - Crated (pounds)	330 (150 kg)

* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest

whole unit.

Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

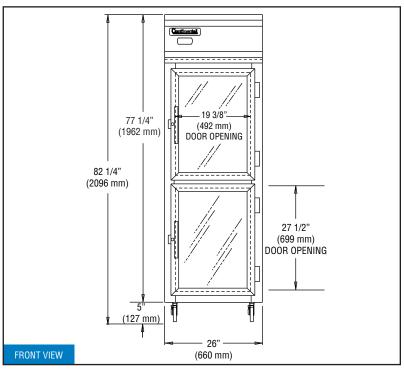

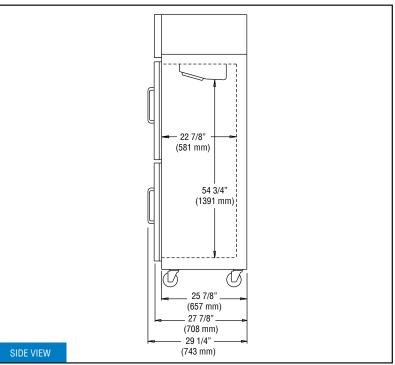

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.