

### STANDARD FEATURES

Double pane lift-up front glass  
Double pane sides  
Lift-up deck and evaporator to allow the perfect cleaning of the tank  
Diffused LED lighting 3000°K  
Plexiglass sliding doors  
Internal condensing unit  
Humidity control  
Cases ship standard unfinished

### OPTIONS

Bumper addition for cart/trolley  
Rolling curtain  
Paper holder  
Pull-out faucet inside the tank  
Cutting board with knives pocket  
Scale holder  
External condensing unit  
Intermediate shelf  
RAL color/laminate front and side panels  
Casters



| LA CROSSE CHOCOLATE            |               |                                     |                                     |                                     |                                     |
|--------------------------------|---------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| TECHNICAL FEATURES             |               | MODELS                              |                                     |                                     |                                     |
|                                |               | LA CROSSE C1150                     | LA CROSSE C1650                     | LA CROSSE C2150                     | LA CROSSE CA90                      |
| External Dimensions (L-D-H)    | Inches        | *46 7/8" - 45 3/8" - 45 1/4"        | *66 9/16" - 45 3/8" - 45 1/4"       | *86 1/4" - 45 3/8" - 45 1/4"        | *63 5/8" - 45 3/8" - 45 1/4"        |
| Inches-MM                      | MM            | *1190 - 1152- 1150                  | *1690 - 1152 - 1150                 | *2190 - 1152 - 1150                 | *1616- 1152 - 1150                  |
| Crated Dimensions (L-D-H)      | Inches        | 53 7/8" - 53 7/8" - 55 1/8"         | 73 5/8" - 53 7/8" - 55 1/8"         | 93 1/4" - 53 7/8" - 55 1/8"         | 70" - 53 7/8" - 55 1/8"             |
| Inches-MM                      | MM            | 1370 - 1370 - 1400                  | 1870 - 1370 - 1400                  | 2368 - 1370 - 1400                  | 1778 - 1370 - 1400                  |
| Humidity Control               | ---           | 35-70%                              | 35-70%                              | 35-70%                              | 35-70%                              |
| Refrigeration                  | Type          | Ventilated                          | Ventilated                          | Ventilated                          | Ventilated                          |
| Refrigeration Display Area     | Type          | Deck                                | Deck                                | Deck                                | Deck                                |
| Operating Temperature          | °C / °F       | 14°C / 58°F                         | 14°C / 58°F                         | 14°C / 58°F                         | 14°C / 58°F                         |
| Compressor                     | Nr./Type      | 1 / Hermetic                        | 1 / Hermetic                        | 1 / Hermetic                        | 1 / Hermetic                        |
| BTU'S @ +35°F Evap Temperature | BTU'S         | 1300 BTU'S                          | 1900 BTU'S                          | 2400 BTU'S                          | 2600 BTU'S                          |
| Electric Supply                | (V/Ph/Hz)     | 230/1/50 (EU)<br>208-220/1/60 (USA) | 230/1/50 (EU)<br>208-220/1/60 (USA) | 230/1/50 (EU)<br>208-220/1/60 (USA) | 230/1/50 (EU)<br>208-220/1/60 (USA) |
| Power Consumption              | (W/A)         | 420W / 2.5A                         | 650W / 4A                           | 850W / 4.5A                         | 1050W / 6A                          |
| Defrost                        | Mode/Type     | Electric                            | Electric                            | Electric                            | Electric                            |
| Climatic Class                 | N°/°C/°F/H.R. | 3/25/77/60%                         | 3/25/77/60%                         | 3/25/77/60%                         | 3/25/77/60%                         |
| Refrigerant Gas                | Type          | R404A                               | R404A                               | R404A                               | R404A                               |
| Net Weights                    | Kg/Lb         | 200Kgs / 440Lbs                     | 290Kgs / 639Lbs                     | 330Kgs / 727Lbs                     | 340Kgs / 749Lbs                     |
| Crated Weights                 | Kg/Lb         | 305Kgs / 672Lbs                     | 435Kgs / 959Lbs                     | 510Kgs / 1124Lbs                    | 535Kgs / 1179Lbs                    |

\* DIMENSIONS ARE WITHOUT SIDE PANELS


\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com



### STANDARD: CHOCOLATE

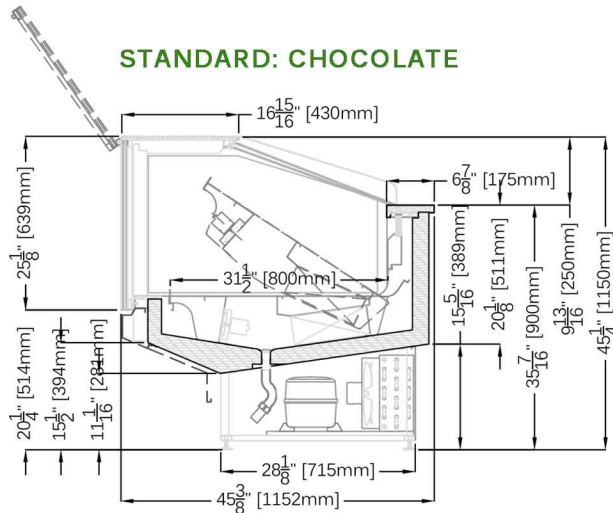


### OPTIONAL: NARROW DEPTH

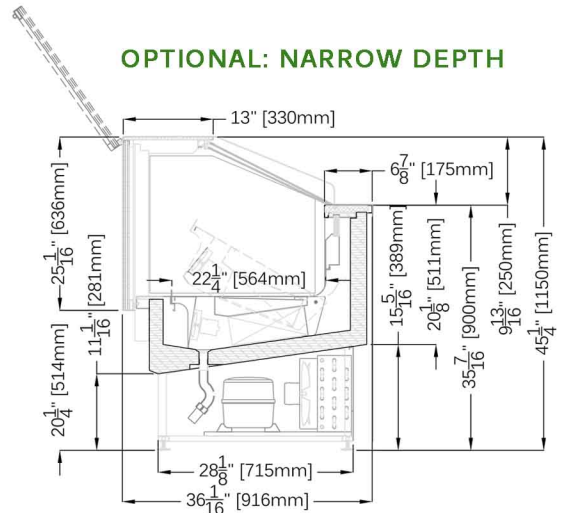


### PLAN VIEWS: LA CROSSE C1150, LA CROSSE C1650, LA CROSSE C2150, LA CROSSE CA90

#### LA CROSSE LINEAR MODELS

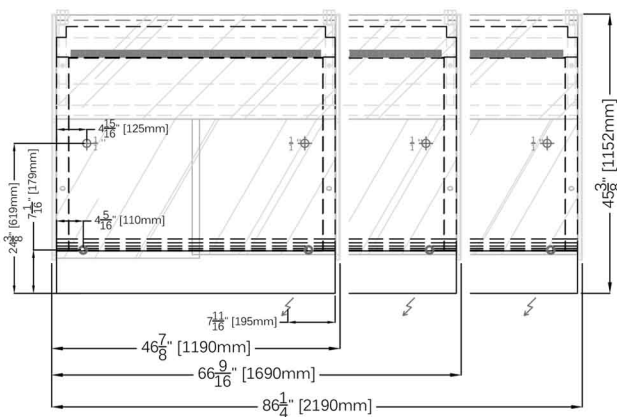


#### LA CROSSE CA90

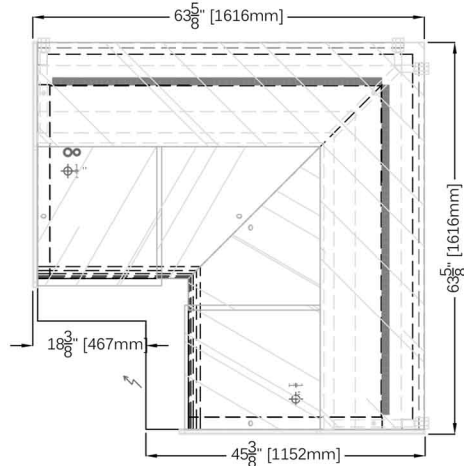


### REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE C1150, LA CROSSE C1650, LA CROSSE C2150, LA CROSSE CA90

#### LA CROSSE LINEAR MODELS

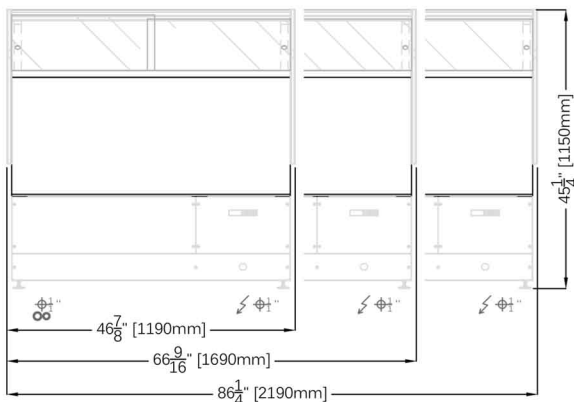

#### LA CROSSE CA90

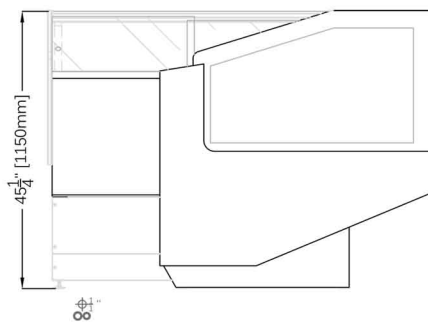

#### ELECTRICAL LEGEND

|    |                    |
|----|--------------------|
| ∞  | REFRIGERATED LINES |
| ⊕" | DRAIN              |
| ⚡  | POWER              |

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.