



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

KC & KC-NU

Mobile All-Purpose Counters

Short Form Specifications

Exterior body is seamless, one-piece molded fiberglass, having perfectly smooth exterior surfaces and corners fully rounded. The fiberglass reinforced polyester (F.R.P.) is molded with permanent color. Stress points are internally reinforced.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Casters unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

The following applies to KC Series only

KC units have a two door dry compartment(s) constructed of 18-gauge stainless steel. Each compartment is equipped with a stainless steel shelf; doors are double-wall construction, with stainless steel front panel.

- KC-28, one compartment, 18" wide with one door
- KC-36, one compartment, 24" wide with one door
- KC-50, one compartment, 36" wide with two doors
- KC-60, one compartment, 48" wide with two doors
- KC-74, one compartment, 48" wide with two doors
- KC-96, two compartments, each 36" wide with two doors each

Optional Accessories and Modifications


- A)** 12" (30.5cm) wide stainless steel fold-down tray slide
- C)** 10" (25.4cm) wide three-bar fold-down tray slide
- D)** 10" (25.4cm) wide composite fold-down cutting boards
- E)** 10" (25.4cm) wide stainless steel fold-down work shelf
- F)** Line-up interlock device
- F1)** Fiberglass door panel insert (KC only)
- G)** Glass-front counter protector
- H)** Two tier display with glass shelves and sneezeguards
- HD)** Dual service two tier display with sneezeguards
- I)** Three tier display with glass shelves and sneezeguards
- J)** 12" (30.5cm) wide 18-gauge stainless steel overshell
- KS)** Single service flip-up sneezeguard
- KD)** Double service flip-up sneezeguard
- L)** *Fluorescent or incandescent light fixtures (specify which)
- M)** *Radiant heat lamps
- MB)** *Bullet-style heat lamps
- P)** Open understorage with shelf (KH-NU Series only)
- Q)** *120V/60Hz/1Ø, 10 amp convenience outlet with breaker
- SG5A)** Single dry insert with doors (KC-NU only)
- SG5B)** Double dry insert with doors (KC-NU only)
- ST)** Stainless steel trim strips
- UU)** Molded fiberglass trim strips
- U)** 14 x 30" (35.6cm x 76.2cm) stainless steel end drop shelf
- V)** 6" (15.2cm) high adjustable stainless steel legs in lieu of casters




Model KC-50
shown with options **A**, **F**, and **G**

Inclusion of these options will alter the electrical specifications of unit.







PLAN VIEW
KC-28/
KC-28-NU

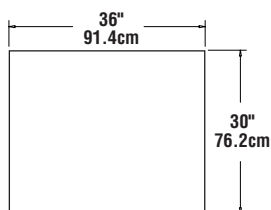


PLAN VIEW
KC-36/
KC-36-NU

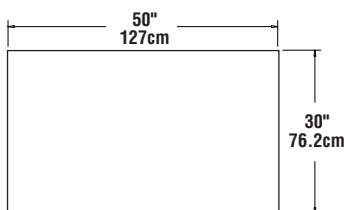


PLAN VIEW
KC-50/
KC-50-NU

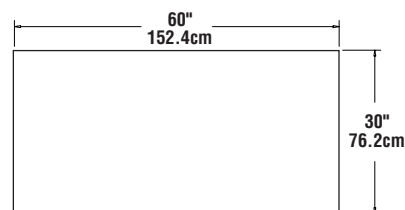


PLAN VIEW
KC-60/
KC-60-NU

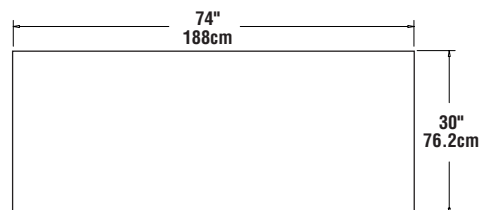


PLAN VIEW
KC-74/
KC-74-NU

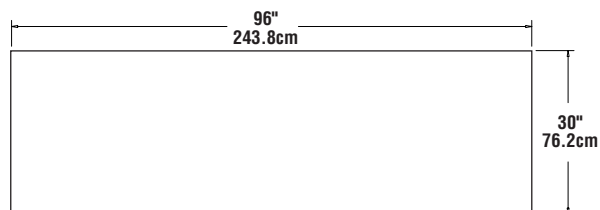


PLAN VIEW
KC-96/
KC-96-NU




ELEVATION VIEW
KC-28 AND
KC-36

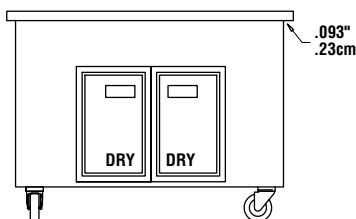

ELEVATION VIEW
KC-50 THROUGH
KC-74

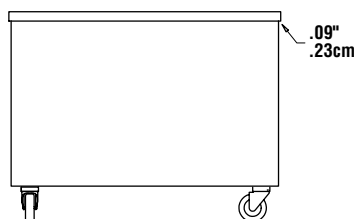

ELEVATION VIEW
ALL KC-NU MODELS

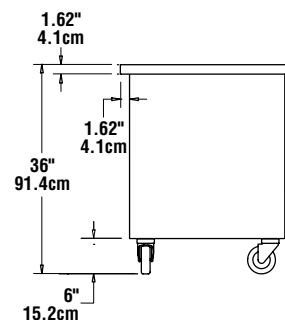

END VIEW
ALL MODELS

Mechanical Data—Standard Unit

MODEL NUMBER	# OF DOORS	# OF SHELVES	SHIP WEIGHT	MODEL NUMBER	SHIP WEIGHT
KC-28	1	1	165 lbs/75 kg	KC-28-NU	120 lbs/54 kg
KC-36	1	1	185 lbs/84 kg	KC-36-NU	160 lbs/73 kg
KC-50	2	1	205 lbs/93 kg	KC-50-NU	180 lbs/82 kg
KC-60	2	1	240 lbs/109 kg	KC-60-NU	210 lbs/95 kg
KC-74	2	1	270 lbs/123 kg	KC-74-NU	240 lbs/109 kg
KC-96	4	2	310 lbs/141 kg	KC-96-NU	280 lbs/127 kg