

DUAL TEMP REFRIGERATOR/FREEZER

Model: 3RFFEN

Natural Refrigerant R-290 Model

3-Section Extra-Wide Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F)

3RFFEN - Stainless steel front, aluminum end panels and interior

3RFFENSA - Stainless steel exterior, aluminum interior

3RFFENSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|--|
| Stainless steel case back | Hinged glass doors |
| Additional epoxy coated steel shelves | Increased refrigeration systems (consult factory) |
| Chrome or stainless steel shelves | Special electrical req. (consult factory) |
| Heavy duty pilaster strips | Half doors |
| Pan slide assemblies | Correctional Facility Options |
| Rehinging of doors (consult factory) | <ul style="list-style-type: none"> One way security screws |
| Wine rack (refrigerator section) | <ul style="list-style-type: none"> Locking hasp (lock not included) |
| Adjustable legs | <ul style="list-style-type: none"> Stainless steel mesh cover |
| Custom laminates | <ul style="list-style-type: none"> Coverless hinges |
| Pass-Thru (consult factory) | |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138

Phone: 215-244-1400

Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|-----------------------|
| Net Capacity (cubic feet) | 50/21 (1416/595 cu l) |
| Width, Overall (inches) | 85 1/2 (2172 mm) |
| Depth, Overall (inches) (including handles) | 35 3/8 (899 mm) |
| Depth (inches) (less doors) | 32 (813 mm) |
| Depth (inches) (doors open 90°) | 58 (1473 mm) |
| Clear Door Width (inches) | 21 7/8 (556 mm) |
| Clear Door Height (inches) | 58 5/8 (1489 mm) |
| Height, Overall (inches) (including 5" casters) | 82 1/4 (2089 mm) |
| Number of Doors | 3 |
| Number of Shelves | 9 |
| Shelf Area (square feet) (per section) | 20.4 (1.9 sq m) |
| Tray Slide Capacity (per section) | 24 |

REFRIGERANT DATA

| | |
|-----------------------------|-------------|
| Condensing Unit Size (H.P.) | 1/4+, 1/2 |
| Capacity (BTU per hour)* | 1940 / 2470 |

ELECTRICAL DATA

| | |
|---|-----------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Feed Wires (including ground) | 3 / 3 |
| Total Amps (International) | 5.9 (3.9) / 9.4 (4.4) |
| Defrost Amps (International) | 6.1 (3.2) |
| (2) 10 ft. Cord/Plug [attach.] (International) | Yes (No) |

SHIPPING DATA

| | |
|------------------------------|------------------|
| Height - Crated (inches) | 85 1/2 (2172 mm) |
| Width - Crated (inches) | 90 (2286 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 181 (5125 cu l) |
| Weight Std - Crated (pounds) | 885 (401 kg) |
| Weight SS - Crated (pounds) | 995 (451 kg) |

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)



* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with two NEMA-5-15P Plugs
(varies by country)

Model Plan Views

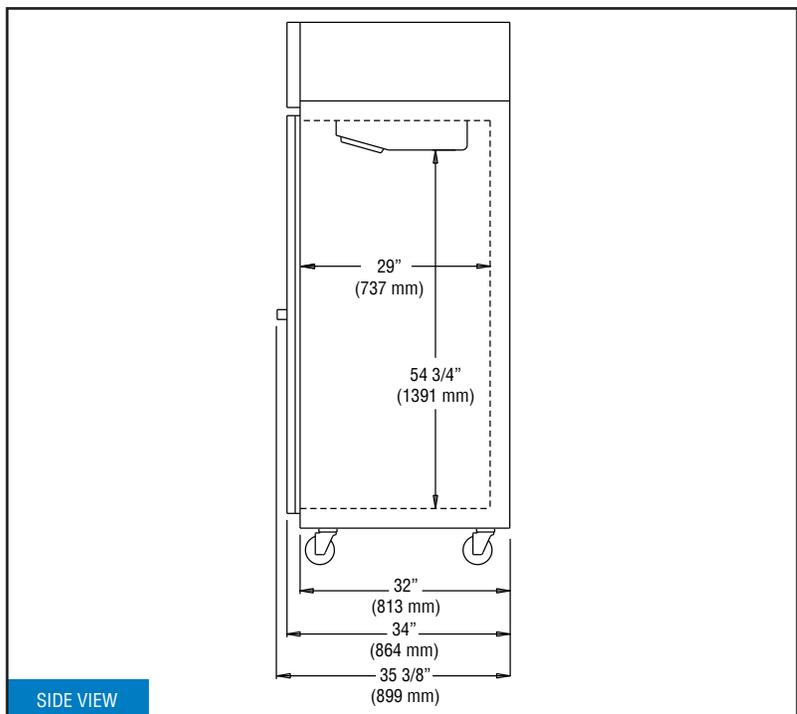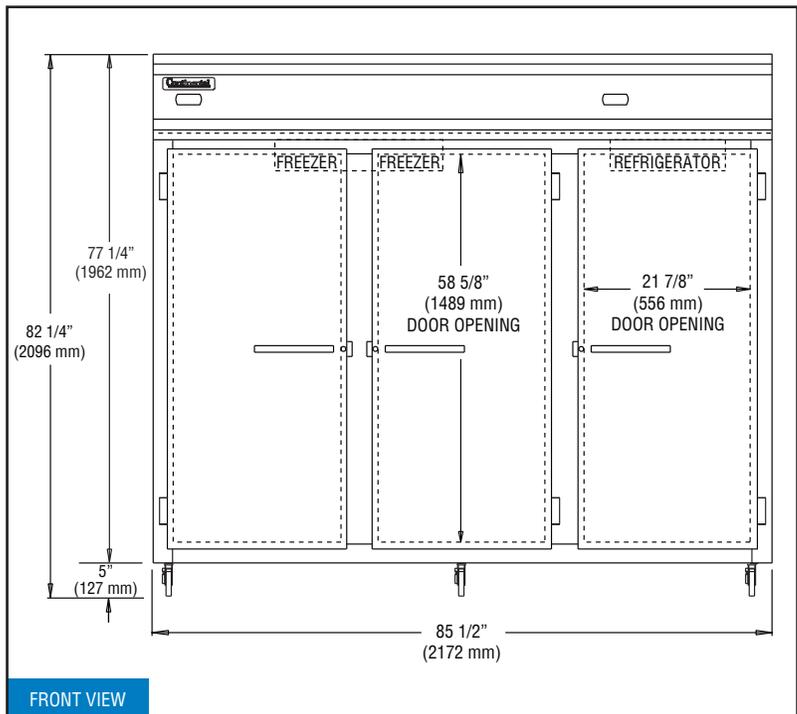

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

