




| Model | Blade | Cutting cross section | Food chute | Chute stroke | Footprint | Overall dimensions | Net weight | Power |
|-------|-----------|-----------------------|------------------------|--------------|---|---|-------------|-------|
| | in mm | in mm | in mm | in mm | in/mm | in/mm | Lbs Kgs | Hp |
| SST14 | 350 14 | 11.02x7.48 280x190 | 11.02x11.81 280x300 | 13 330 | A 22.24/565 B 14.96/380 H 18.50/470 | A 27.95/710 B 23.62/600 H 18.50/470 | 70.54 32 | 1/2 |

Cord & Plug: Attached 5.5 foot flexible 3-wire cord with molded plug fits a grounded receptacle. NEMA 5-15. Voltage: 115 - 60 - 1

GRAVITY

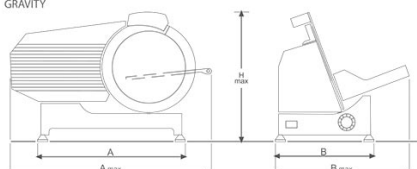

SST14 is a premium heavy-duty manual slicer.

The SST-Series line of premium slicers from Rheninghaus delivers precision, performance, industry-leading convenience, superior cleanability and lasting value.

The special protections make it suited for humid environments. Ideal for deli shops, supermarkets, restaurants, hotels, catering companies.

- Anodized aluminium casting construction: sturdy and light weight.
- 14" high quality hardened chromium steel alloy blade.
- Permanently attached knife ring guard.
- 0 to 9/16" slice thickness.
- Powerful and noiseless continuous use motor.
- Insulated switch. Overload protection manual reset.
- Gear drive: long life, no maintenance.
- Carriage smooth glide motion also with heavy products.
- Removable last slice device for easy cleaning.
- Large clearance between the back of the blade and the base provides access for easy cleaning.
- Slice thickness precision adjustment: gasket-sealed mechanism.
- Drip deflecting edge of the gauge plate: adjustment mechanism is protected.
- No-drip edge base: easy cleaning.
- Stainless steel ball-bearing blade pulley and special moisture-proof gasket.
- Built-in sharpener, removable for cleaning purposes.
- 30° carriage angle: good visibility of the slice exit area and better ergonomics.
- Non-slip rubber feet.

Large clearance
between blade and base.
High protection
against moisture.

Powerful and noiseless
motor.

Wide
slice
exit area.

Carriage smooth
glide motion.

Sturdy construction
for precise slices.

Thickness adjustment:
gasket-sealed mechanism.



Proudly
Made in Italy