

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Mobile Ice Bin



IBM-18x30

IBM-18x30, IBM-18x30-E

- All stainless steel construction
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner and acts as thermal barrier to prevent heat transfer
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Recessed leg tube sockets and bottom floor for extra stability and additional storage
- Four 4" casters (two locking)
- Drain valve for draining melted ice
- Also available with enclosed base. Add suffix "-E" to model number.



Intertek
4004503

Conforms to NSF/ANSI STD 2



IBM-18x30-E

Specifications

Drain

- 1" tailpiece. Includes factory installed drain valve. No plumbing hook-up required

Liner Depth

- 10-1/2"

Ice Capacity

- 85 lbs

Casters

- Four heavy duty casters
- The two server side casters are locking

Materials

- 20 gauge stainless steel parts include: all components unless otherwise noted
- 18 gauge stainless steel parts include: bottom shelf on IBM-18x30
- 16 gauge stainless steel parts include: legs on IBM-18x30
- PVC plastic breaker strip around opening of ice bin liner




To view underbar installation instructions, please visit: https://www.glastender.com/PDF/F-750-165_Underbar_Installation_Instructions.pdf
 To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Mobile Ice Bin

Dimensional Information

IBM-18x30

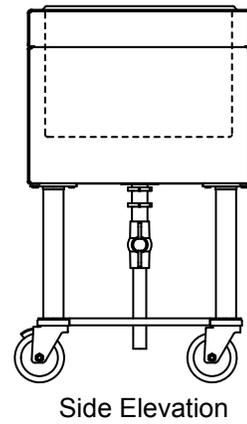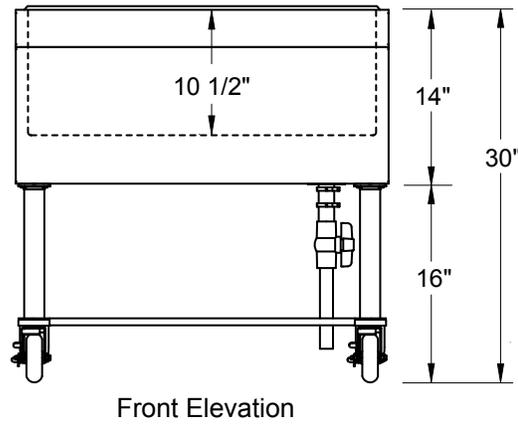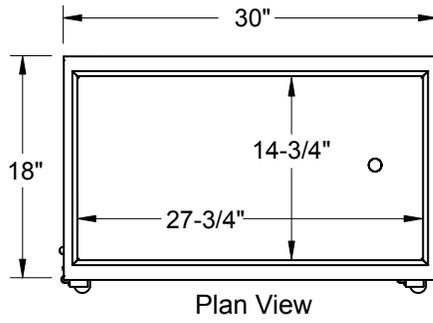

IBM-18x30-E

