



Discover the Art of Display...



Photo shown with optional custom finish. Standard cases are stainless steel front and sides.



Visit our website for more finishing options and RAL colors
www.oscartek.com

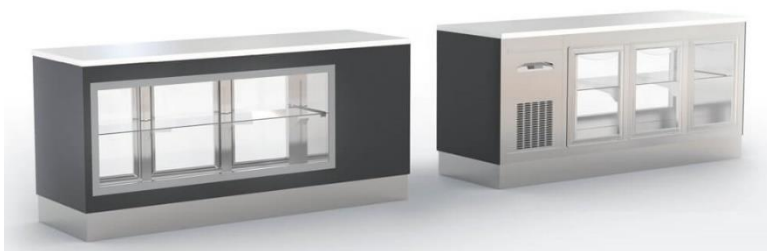


Photo shown with RAL color finish

Project Name: _____
Item #: _____ Quantity: _____

UNDER COUNTER WINDOW

MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

STANDARD FEATURES

- Stainless steel counter bar
- Ventilated refrigerated
- Ecological CFC free polyurethane foam
- AISI 304 stainless steel module with BA external finish and 2B internal finish
- Stainless steel intermediate and adjustable shelf
- Round corners inside the model
- High capacity evaporator with fan system
- Stainless steel adjustable feet
- Glass doors
- Steel frame
- Patented access system for electrical plumbing and refrigeration
- Digital Dixell control with safe housing
- Self contained and remote available

OPTIONS

- Humidity control for chocolate (208-220V)
- Stainless steel doors
- Stone top
- RAL color/laminate front and side panels
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com




UNDER COUNTER WINDOW


MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW: A: 26"D – REMOTE


PLAN VIEWS: 26"D - REMOTE

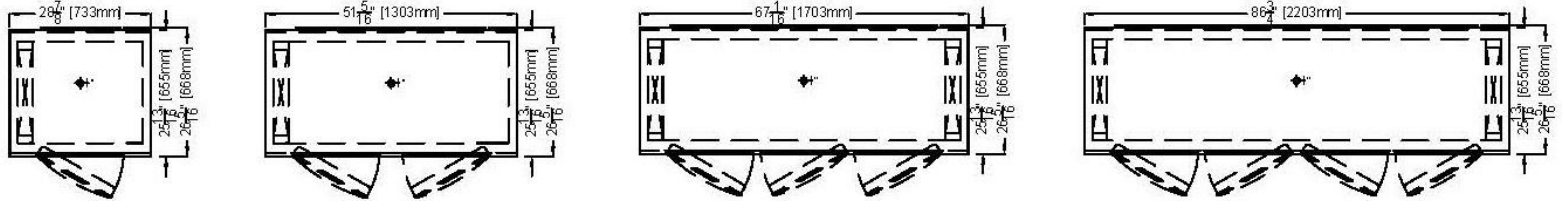

REAR ELEVATIONS (OPERTOR SIDE): 26"D – REMOTE

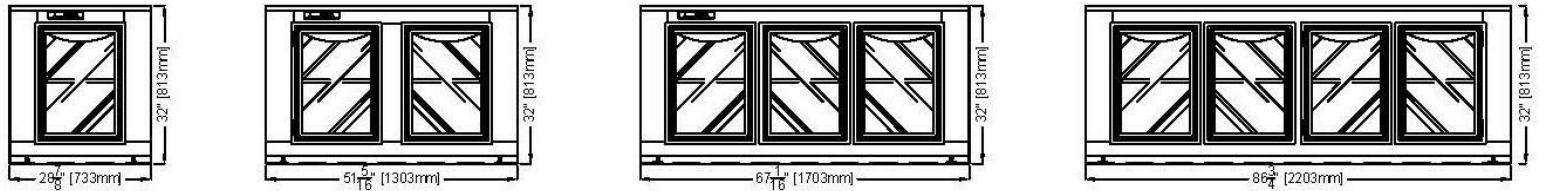

FRONT ELEVATIONS (CUSTOMER SIDE): 26"D – REMOTE

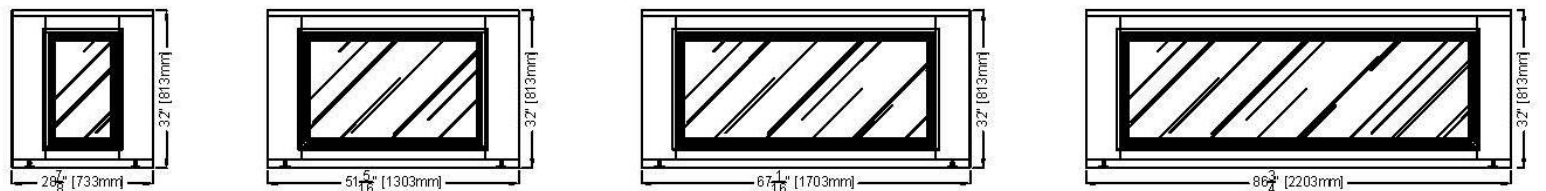

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com




UNDER COUNTER WINDOW


MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW: A: 26"D – SELF CONTAINED


PLAN VIEWS: 26"D – SELF CONTAINED

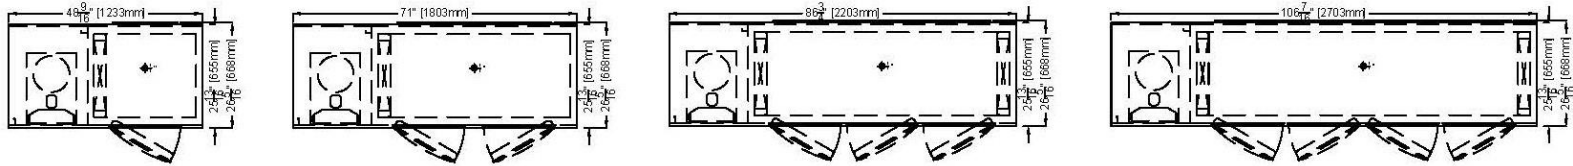

REAR ELEVATION (OPERTOR SIDE): 26"D – SELF CONTAINED

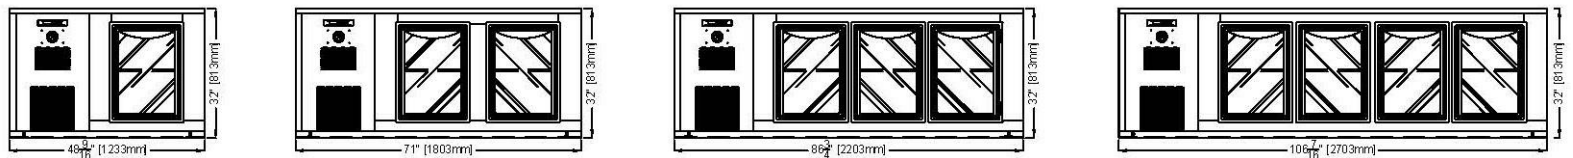

FRONT ELEVATIONS (CUSTOMER SIDE): 26"D – SELF CONTAINED

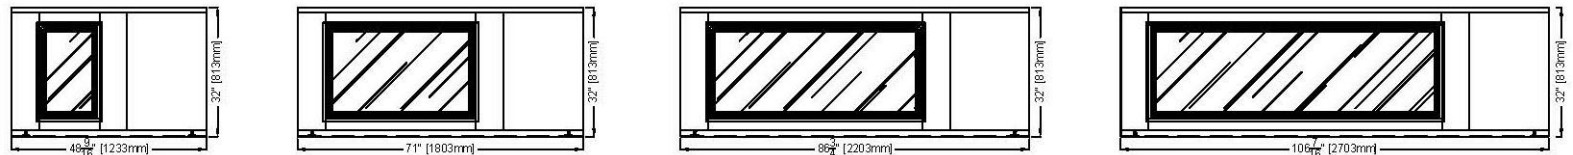

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com




UNDER COUNTER WINDOW


MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW: B: 30"D – REMOTE


PLAN VIEWS: B: 30"D – REMOTE

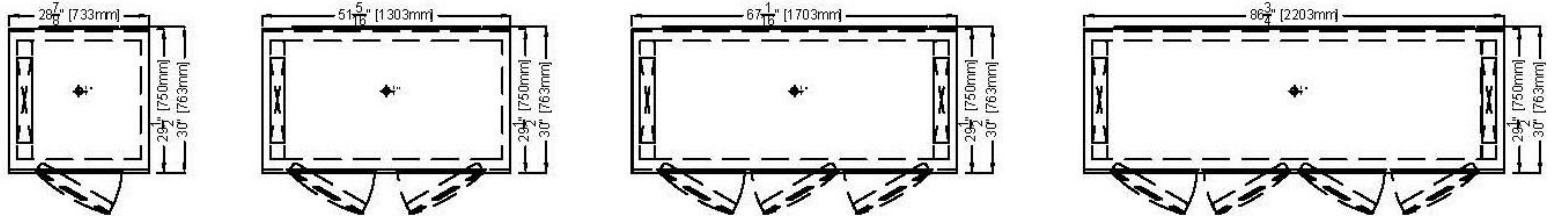

REAR ELEVATIONS (OPERTOR SIDE): B: 30"D – REMOTE

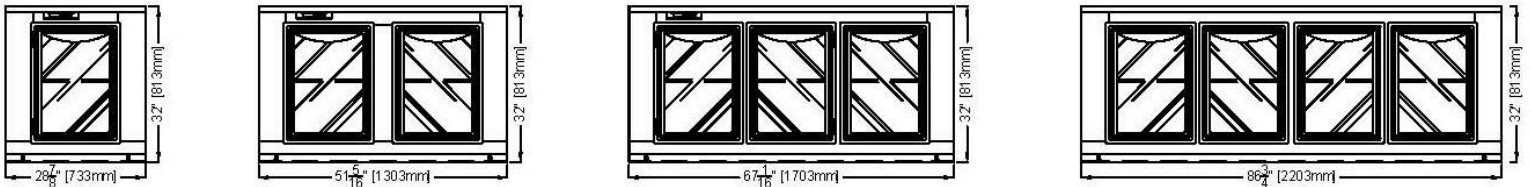

FRONT ELEVATIONS (CUSTOMER SIDE): B: 30"D – REMOTE

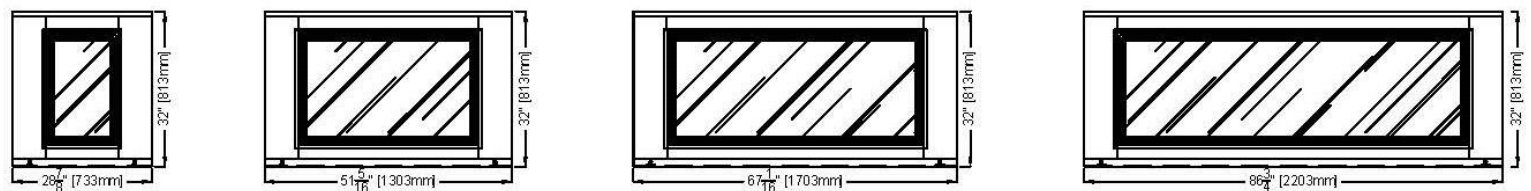

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 650.342.2400 | Fax: 650.342.7400
 www.oscartek.com




UNDER COUNTER WINDOW


MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW: B: 30"D – SELF CONTAINED


PLAN VIEWS: B: 30"D – SELF CONTAINED

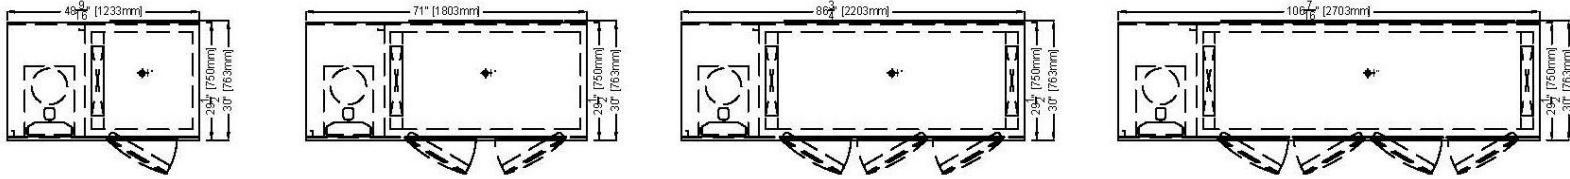

REAR ELEVATIONS (OPERATOR SIDE): B: 30"D – SELF CONTAINED

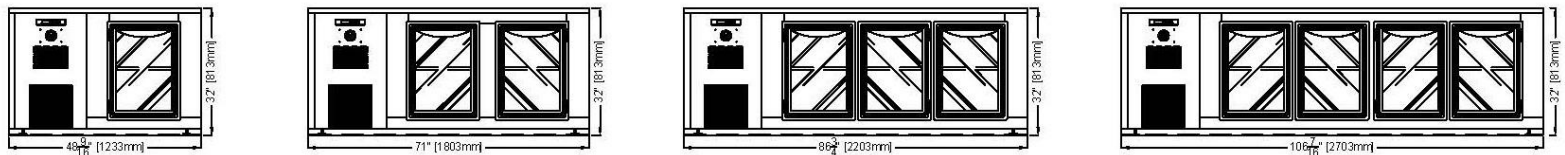

FRONT ELEVATIONS (CUSTOMER SIDE): B: 30"D – SELF CONTAINED

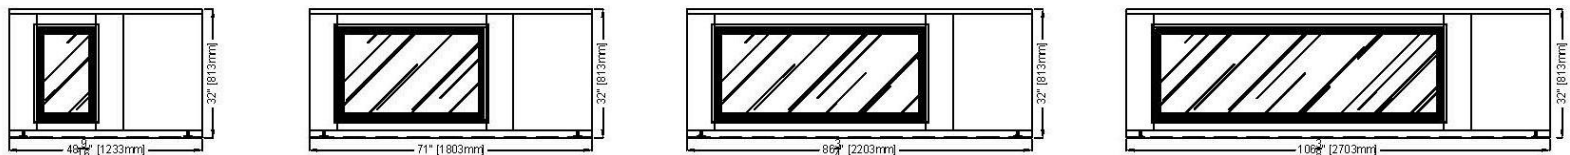

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*


OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

UNDER COUNTER WINDOW


MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW: A: 26"D – REMOTE & SELF CONTAINED

STANDARD: LEGS

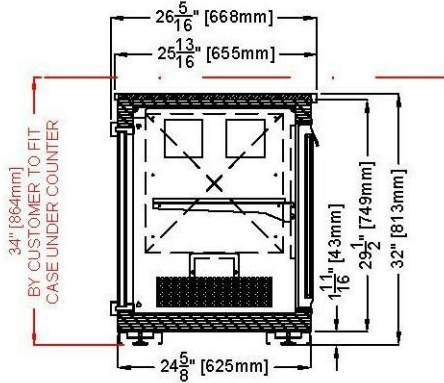


OPTIONAL: CASTERS

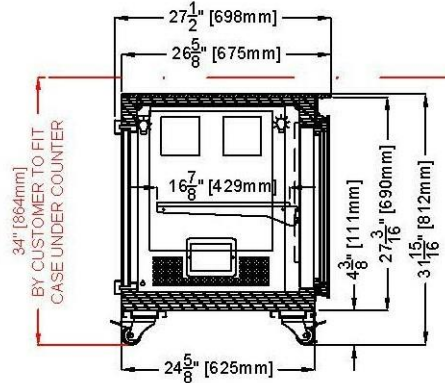


UNDER COUNTER WINDOW: B: 30"D – REMOTE & SELF CONTAINED

STANDARD: LEGS

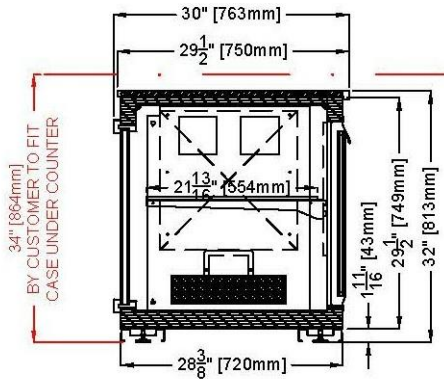

OPTIONAL: CASTERS

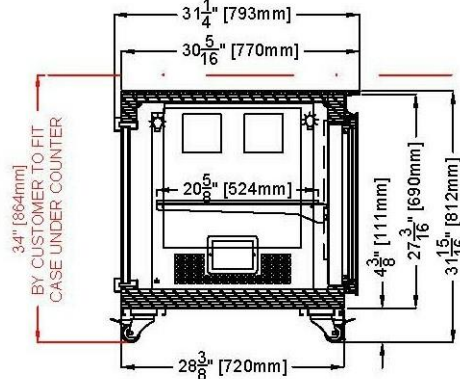

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Discover the Art of Display...

Project Name: _____
Item #: _____ Quantity: _____

UNDER COUNTER WINDOW

MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW - A: 26"D (REMOTE)					
TECHNICAL FEATURES		MODELS			
		UCW730R-A	UCW1300R-A	UCW1700R-A	UCW2200R-A
External Dimensions (L-D-H) Inches-MM	Inches MM	*28 7/8" - 26 5/16" - 32" *733 - 668 - 813	*51 5/16" - 26 5/16" - 32" *1303 - 668 - 813	*67 1/16" - 26 5/16" - 32" *1703 - 668 - 813	*86 3/4" - 26 5/16" - 32" *2203 - 668 - 813
Crated Dimensions (L-D-H) Inches-MM	Inches MM	36" - 34" - 40" 914 - 864 - 1016	59" - 34" - 40" 1500 - 864 - 1016	75" - 34" - 40" 1905 - 864 - 1016	95" - 34" - 40" 2413 - 864 - 1016
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Operating Temperature	°F	38°F - 40°F	38°F - 40°F	38°F - 40°F	38°F - 40°F
BTU'S @ +14°F Evap Temperature	BTU's	600	1100	1400	1900
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	500/4	720/6	840/7	1070/9
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	345	375	450	520
Crated Weights	Lb	401	440	510	600
*DIMENSIONS ARE WITH POLISHED S/S SIDES					

UNDER COUNTER WINDOW - A: 26"D (SELF CONTAINED)					
TECHNICAL FEATURES		MODELS			
		UCW1230SC-A (UNEWD050)	UCW1800SC-A (UNEWD070)	UCW2200SC-A (UNEWD087)	UCW2700SC-A (UNEWD0110)
External Dimensions (L-D-H) Inches-MM	Inches MM	*48 9/16" - 26 5/16" - 32" *1233 - 668 - 813	*71" - 26 5/16" - 32" *1803 - 668 - 813	*86 3/4" - 26 5/16" - 32" *2203 - 668 - 813	*106 7/16" - 26 5/16" - 32" *2703 - 668 - 813
Crated Dimensions (L-D-H) Inches-MM	Inches MM	56" - 34" - 40" 1422 - 864 - 1016	79" - 34" - 40" 2007 - 864 - 1016	94" - 34" - 40" 2388 - 864 - 1016	115" - 34" - 40" 2921 - 864 - 1016
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Operating Temperature	°F	38°F - 40°F	38°F - 40°F	38°F - 40°F	38°F - 40°F
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	650/5.9	750/6.9	850/7.9	1050/10.2
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	180	240	280	310
Crated Weights	Lb	260	320	360	390
*DIMENSIONS ARE WITH POLISHED S/S SIDES					

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com





Discover the Art of Display...

Project Name: _____
Item #: _____ Quantity: _____

UNDER COUNTER WINDOW

MODELS: UCW730R, UCW1300R, UCW1700R, UCW2200R, UCW1233SC, UCW1803SC, UCW2203SC, UCW2700SC

UNDER COUNTER WINDOW - B: 30"D (REMOTE)					
TECHNICAL FEATURES		MODELS			
		UCW730R-B	UCW1300R-B	UCW1700R-B	UCW2200R-B
External Dimensions (L-D-H) Inches-MM	Inches MM	*28 7/8" - 30" - 32" *733 - 763 - 813	*51 5/16" - 30" - 32" *1303 - 763 - 813	*67 1/16" - 30" - 32" *1703 - 763 - 813	*86 3/4" - 30" - 32" *2203 - 763 - 813
Crated Dimensions (L-D-H) Inches-MM	Inches MM	36" - 38" - 40" 914 - 965 - 1016	59" - 38" - 40" 1500 - 965 - 1016	75" - 38" - 40" 1905 - 965 - 1016	95" - 38" - 40" 2413 - 965 - 1016
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Operating Temperature	°F	38°F - 40°F	38°F - 40°F	38°F - 40°F	38°F - 40°F
BTU'S @ +14°F Evap Temperature	BTU's	600	1100	1400	1900
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	500/4	720/6	840/7	1070/9
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	345	375	450	520
Crated Weights	Lb	401	440	510	600
*DIMENSIONS ARE WITH POLISHED S/S SIDES					

UNDER COUNTER WINDOW - B: 30"D (SELF CONTAINED)					
TECHNICAL FEATURES		MODELS			
		UCW1230SC-B (UNEWD050)	UCW1800SC-B (UNEWD070)	UCW2200SC-B (UNEWD087)	UCW2700SC-B (UNEWD0110)
External Dimensions (L-D-H) Inches-MM	Inches MM	*48 9/16" - 30" - 32" *1233 - 763 - 813	*71" - 30" - 32" *1803 - 763 - 813	*86 3/4" - 30" - 32" *2203 - 763 - 813	*106 7/16" - 30" - 32" *2703 - 763 - 813
Crated Dimensions (L-D-H) Inches-MM	Inches MM	56" - 38" - 40" 1422 - 965 - 1016	79" - 38" - 40" 2007 - 965 - 1016	94" - 38" - 40" 2388 - 965 - 1016	115" - 38" - 40" 2921 - 965 - 1016
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Operating Temperature	°F	38°F - 40°F	38°F - 40°F	38°F - 40°F	38°F - 40°F
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	650/5.9	750/6.9	850/7.9	1050/10.2
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	180	240	280	310
Crated Weights	Lb	260	320	360	390
*DIMENSIONS ARE WITH POLISHED S/S SIDES					

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

