

Pasta Cooker High BTU CPG-2



STANDARD FEATURES

- Double chamber in 18/10 stainless steel
- 304 and 316 series stainless steel construction.
- 12 gallon water capacity per tank chamber.
- Dual Burners Per Tank Chamber.
- Triple fiberglass insulation on all sides.
- Seamless stainless steel baskets with specially designed perforated holes.
- Multiple basket size configurations.
- Specially designed burner creates a water current flow that lifts starch carrying it out to the overflow drain.
- Automatic pilot.
- Top mount water faucet for continuous clean water flow.
- · Low water saftey cut-off.
- 80,000 BTU per chamber burners.
- · Adjustable legs.

OPTIONS

- Single chamber.
- Triple chamber.
- Multiple basket size configuration in stainless steel.
- Casters.


\vdash	I\/I	١
_	IV	١.


PROJECT:


DATE:



Pasta Cooker High BTU CPG-2

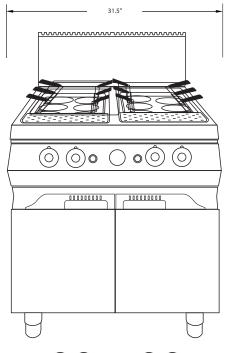







MODEL	UNIT DIMENSION W x D x H	TANK DIMENSION W x D x H	CAPACITY (GAL.)	WT.	SHIP WT.	K.W.	V.	PH.	HZ.	AMPS	H ₂ O	GAS	DRAIN	BTU	WATER COLUMN
CPG 2 (GAS)	31.5" x 37.25 x 45	12" x 20 x 12	24 gal.	280 lbs.	300 lbs.	Х	X	X	X	Х	1/2"	1/2" (2 inlets)	1 ¼" (2 outlets)	80,000 (per side)	4 ½"

Rosito Bisani Imports, Inc.

940 South La Brea Avenue, Los Angeles CA, 90036 Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444 E-mail: sales@rosito-bisani.com

www.rosito-bisani.com

530 South Henderson Road, Suite F, King of Prussia PA, 19406 Tel: 610-265-5950 • Fax: 888-576-8524

