REACH-IN FREEZER (0°F)

Model: 1FSEN

Natural Refrigerant R-290 Model

1-Section Slim Line Reach-In Freezer

1FSEN - Stainless steel front, aluminum end panels and interior

1FSENSA - Stainless steel exterior, aluminum interior

1FSENSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Additional epoxy coated steel shelves	Shallow depth (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Adjustable legs	One way security screws
Custom laminates	Locking hasp (lock not included)
Half doors	Stainless steel mesh cover
Pass-Thru (consult factory)	Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Cresified		
Model Specified:		
Location:		
Item No:	Quantity:	
a.a. //	010 #	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing door

Mangetic snap in Santoprene® door gasket

Cylinder lock in door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

5" casters

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Will accomodate 12 x 20 pans

Rehinging of doors (in the field)

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	15 (425 cu I)
Width, Overall (inches)	17 ¾ (451 mm)
Depth, Overall (inches) (including handle)	35 3/8 (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	49 ½ (1257 mm)
Clear Door Width (inches)	13 1/8 (333 mm)
Clear Door Height (inches)	60 5/8 (1540 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	1
Number of Shelves	5
Number of Shelves Shelf Area (square feet)	5 9.3 (0.9 sq m)
-	-
Shelf Area (square feet)	-
Shelf Area (square feet) REFRIGERANT DATA	9.3 (0.9 sq m)
Shelf Area (square feet) REFRIGERANT DATA Condensing Unit Size (H.P.)	9.3 (0.9 sq m)
Shelf Area (square feet) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU per hour)*	9.3 (0.9 sq m)
Shelf Area (square feet) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU per hour)* ELECTRICAL DATA	9.3 (0.9 sq m) 1/2 1590
Shelf Area (square feet) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU per hour)* ELECTRICAL DATA Voltage (International)	9.3 (0.9 sq m) 1/2 1590 115/60/1 (220/50/1)

(International)

Defrost Amps (International)

10 ft. Cord/Plug [attached]

SHIPPING DATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	32 (813 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	300 (136 kg)
Weight SS - Crated (pounds)	320 (145 kg)

 $^{^\}star$ Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

3.7 (2.0)

Yes

(No)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

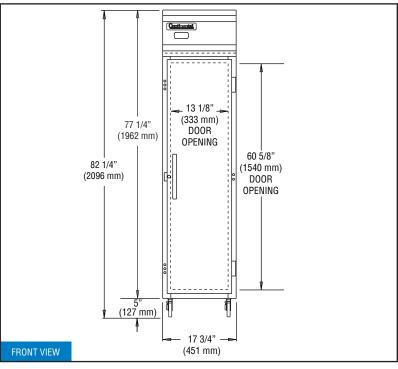

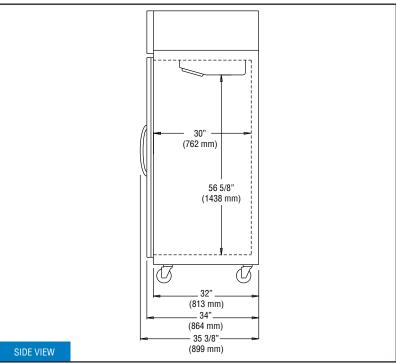

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.