



TT98E

Conveyor pizza oven

COMPOSITION WITH 1 BAKING DECK



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- ☐ Support with castors, height 600mm(23 1/2")
- ☐ Online connection REMOTE-MASTER® TECHNOLOGY
- ☐ Thick mesh for direct baking of low-moisture doughs or for grilling vegetables

MORETTI FORNI S.P.A.

www.morettiforni.com

info@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA

Tel. +39.0721.96161 - Fax +39.0721.9616299

EXTERNAL CONSTRUCTION

- ☐ Structure in folded stainless steel sheets
- ☐ Stainless steel door hinged on left hand side with tempered silk-screen processed glass logo BlackBar Design
- ☐ Stainless steel access flap hinged at bottom
- ☐ Tempered glass window
- ☐ Stainless steel handle equipped
- ☐ Extractable stainless steel conveyor belt, with continuous tensioning
- ☐ Electronic control panel on front left side

INTERNAL CONSTRUCTION

- ☐ Baking chamber in stainless steel sheets
- ☐ Top and bottom blowers in welded stainless steel sheets, extractable for cleaning
- ☐ Rock wool heat insulation, thermal joints and air space COOL AROUND® TECHNOLOGY

FUNCTIONING

- ☐ Heated by armoured heating elements powered independently in adaptive mode
- ☐ Control of power PID (Proportional Supplementary Derivative) can allow the automatic regulation of energy necessary on the basis of the quantity of the batch product and the position inside the baking chamber ADAPTIVE-POWER® TECHNOLOGY
- ☐ Independent adjustment and control of ceiling and floor, both on the input side and the output one of the baked product, with continuous temperature detection using 4 high sensitive thermocouples DUAL-TEMP® TECHNOLOGY
- ☐ Air blowing system using 2 stainless steel fans independently motorized
- ☐ Conveyor belt with speed adjustable from 2 to 20 minutes and feed-back control at the option of belt standstill
- ☐ Programmable electronic function management ECO-SMARTBAKING®
- ☐ Maximum temperature reached 320°C (608°F)
- ☐ Independent system for additional forced air cooling of the components with low noise

STANDARD EQUIPMENT

- ☐ Color multilanguage display TFT 5"
- ☐ 100 customisable programs
- ☐ ECO-STAND BY® TECHNOLOGY Saving device with the possibility to stop the belt for break
- ☐ Discontinuous baking cycle STEP
- ☐ Start-Stop function to move tape to the set point is reached
- ☐ LOCK function
- ☐ Weekly Timer with the possibility to program two lightings and two power off every day
- ☐ Customized Hotkey with recurring control
- ☐ Auto test with display of error message
- ☐ USB slot for data reading / programs DATA-FEED® SYSTEM
- ☐ Double independent maximum temperature and minimum blow pressure safety devices
- ☐ Stainless steel product stand






TT98E 1 DECK

(assembled with support height 600mm(23 1/2"))

TOP VIEW

REAR VIEW

RIGHT SIDE VIEW

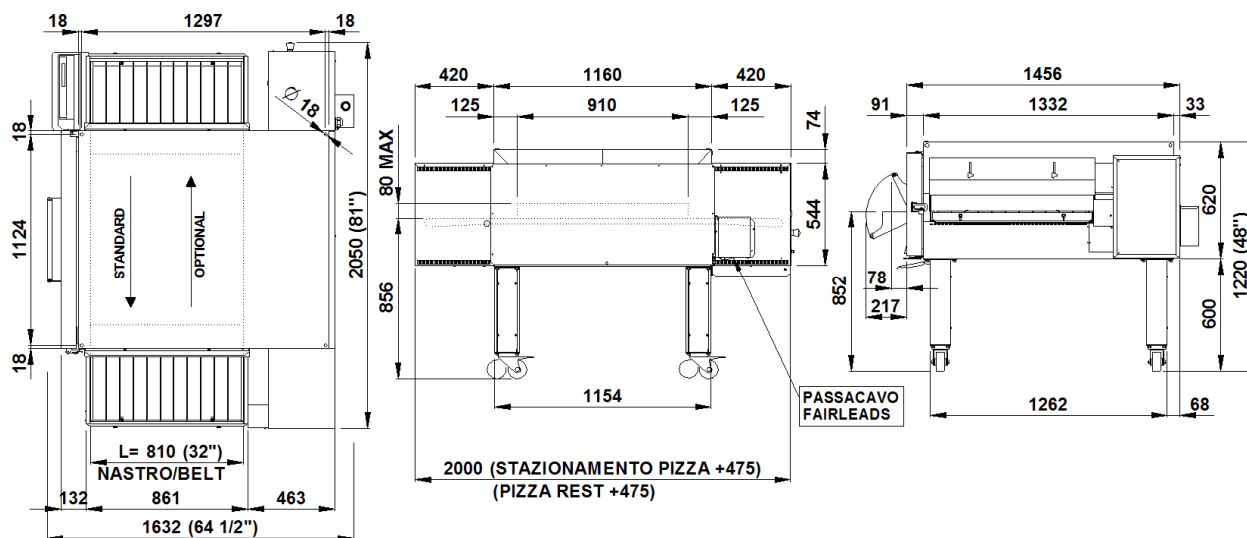

Note: The dimensions indicated in the views are in millimeters.

SPECIFICATIONS

The appliance comprises one baking element and an optional support. Baking takes place by passing the product between two adjustable flows of hot air, which allow perfect distribution of heat throughout the chamber, making this oven particularly suitable to bake pizza and other alimentary products. The regulation of power is automatic in basis of the load, the ceiling and floor resistors, both on the input side and the output one of the baked product, are controlled independently, and the belt speed is reverse controlled and adjustable. Stainless steel access flap hinged at bottom with tempered glass window. Efficiently insulated and isolated, the outer surfaces are further cooled by a very low noise flow of air. The support comprises stainless steel legs on swivel castors. The maximum temperature in the baking chamber is 320°C (608°F).

All the data give below refers to the configuration with 1 baking deck

DIMENSIONS

External height	1220mm(48 1/4")
External depth	1531mm(60 1/4")
External width	2050mm(80 3/4")
Weight (excl.supp)	358kg(790lb)
Tot. baking surface	0,74m ² (7,96 ft ²)

TOTAL BAKING CAPACITY

*N° Pizzas/hour	
Pizzas diameter 330mm(13")	N°125
Pizzas diameter 450mm(18")	N°48

SHIPPING INFORMATION

Dimensions of packed oven	
Height	790mm(31 1/4")
Depth	1725mm(68")
Width	2152mm(84 3/4")
Weight	((358+30)kg(790+66)lb)

PACKAGED DIMENSIONS

Height	250mm(10")
Depth	600mm(23 1/2")
Width	700mm(27 1/2")
Weight	((24+2)kg(53+5)lb)

SUPPORT

FEEDING AND POWER (EACH DECK NEEDS TO BE CONNECTED INDEPENDENTLY AND THE LOAD SHOWN BELOW ARE PER DECK)

<i>Standard feeding</i>	
A.C. V240 3ph	
<i>Feeding on request</i>	
A.C. V208 3ph	
Frequency	60Hz
Max power	21,8kW/DECK
*Medium cons/hour	8,8kWh/DECK
Connecting cable	
type	
6AWG/DECK (V240 3ph)	
6AWG/DECK (V208 3ph)	

***This value is subject to variation according to the way in which the equipment is used**

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice