

Vacuum Packaging System Spec Sheet

GREENVAC

VACUUM PACKAGING SYSTEM

ITEM: GV150-GN1/2



DESCRIPTION

The robust, stainless steel 150-1/2 GN vacuum packaging system is standard equipped with a vacuum lid, gasket seal & nozzle. NSF certified

WARRANTY

All models shown come with Invacus standard one year warranty against defects in materials and workmanship. For full warranty details, please refer to: Invacus.com





FEATURES

GN1/2 are manufactured with 17/18 gauge chrome nickel steel. In comparison, conventional containers are manufactured with 22/24 gauge steel. Oven safe.

LIDS

Developed from a high performance plastic (Tritan)
Product Facts:

- · High impact resistance
- ·High weather resistance
- ·High chemical resistance
- Perfect abrasions-resistance and sliding condition
- Minimum water absorption very high dimensions stability
- ·Minimum specific weight
- Excellent high impact resistance
- High barrier-character
- ·Lids short term resistant to temperatures up to 194°F (dishwater)

SEALS

The gaskets are made of food compatible silicone.

The valve is produced from latex.

All GreenVAC components are new developments for a use in high vacuum. The atmospheric pressure in such a vacuum has a value of 900 - 1700kg / cm2 depending on the size of GreenVAC container!

Used in connection with:

- ·Henkelman Vacuum Machine w/External Adapter.
- A retrofitted chamber machine.
- Directly in the chamber of a standard vacuum machine, sizes are dependent on the chamber size.






Invacus LLC - info@invacus.com / 331-979-2013 493. W. Fullerton Ave, Elmhurst, IL 60126

Multi-Purpose Vacuum Pans

DIMENSIONS IN INCHES

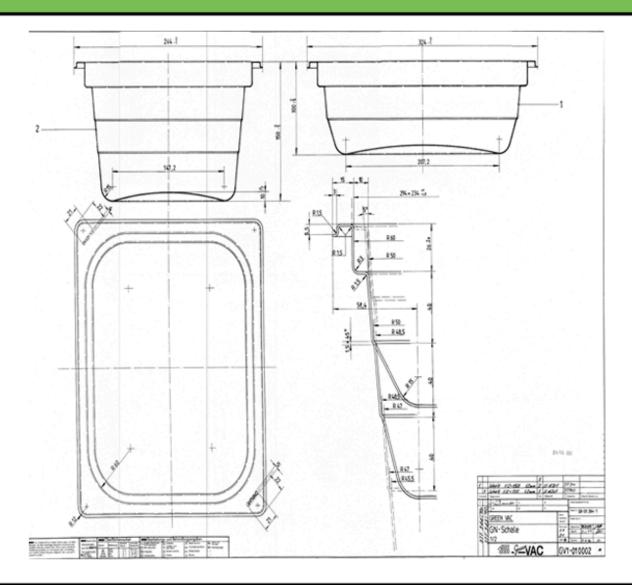

MODEL	DIMENSIONS (INCHES)			WEIGHT (LBS)	CAPACITY (US FLUID OZ)
GV150-GN1/2	L	W	Н	4.76 lbs	189.3 fl oz
	12.8"	10.4"	5.9"		





Invacus LLC - info@invacus.com / 331-979-2013 493. W. Fullerton Ave, Elmhurst, IL 60126