


SPIKA NG 285

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

3 YEARS
WARRANTY
PARTS & LABOR

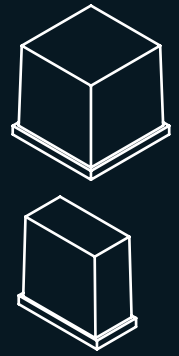

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 37" TO 39"



		 	 				
	24 H Lbs	70°F/21°C 50°F/10°C lbs (Kg)	90°F/32°C 70°F/21°C lbs (Kg)	lbs (Kg)	in (mm)	in (mm)	SPIKA HALF DICE 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 285 A		323 (146)	267 (121)	99 (45)	Width 30" (762) Depth 30" (762) Height* 33" (838)	Width 33" (835) Depth 33" (835) Height 38" (970)	
SPIKA NG 285 W		323 (146)	267 (121)				SPIKA FULL DICE 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions

* WITH LEGS 37"/39"

ACCESSORIES

INCLUDED




NOT INCLUDED (OPTIONAL)




TECHNICAL SCHEME

SPIKA NG 285


RIGHT SIDE VIEW




FRONTAL VIEW

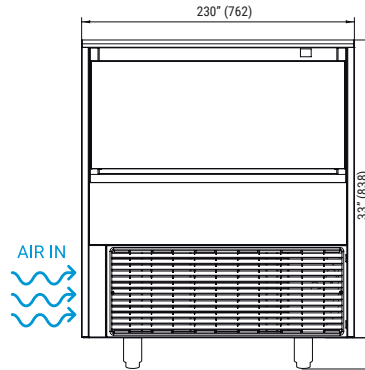

LEFT SIDE VIEW

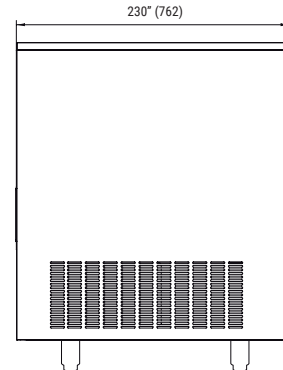

REAR VIEW

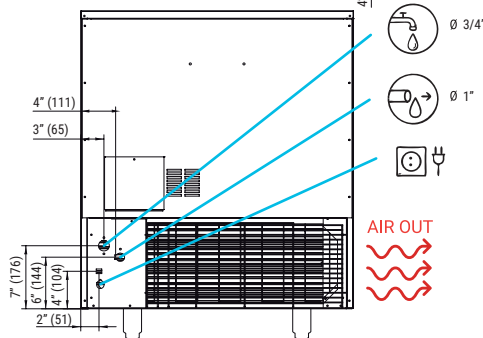

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) / 87 psi (6 bar)

144/288 Ice cubes/cycle

V	Hz	ph
115	60	1N



FULL DICE

SPIKA NG 285 AIR COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	337	318	300	280
68° 21°	323	307	283	265
90° 32°	305	290	267	242
109° 43°	283	266	245	218



FULL DICE

SPIKA NG 285 WATER COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	337	318	300	280
68° 21°	323	307	283	265
90° 32°	305	290	267	242
109° 43°	283	266	245	218

MODELS

SPIKA NG 285 A

SPIKA NG 285 W

	ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
SPIKA NG 285 A	7,681 2,251	780	14/1,5	3	15	7,21 22,4 16,4	5,156 1,511	185	214
SPIKA NG 285 W	7,681 2,251	780	14/1,5	3	15	5,26 117,3 61,8	5,156 1,511	185	214



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions



VERTICAL SYSTEM