



CS (DRY)

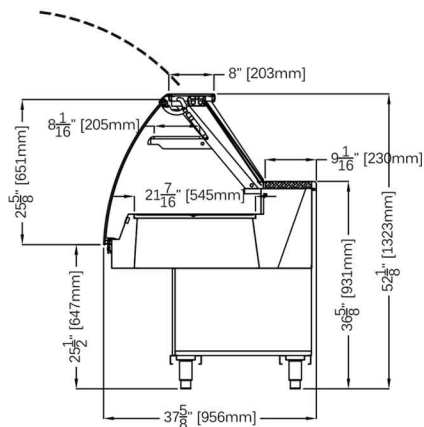

CBM (BAIN MARIE)

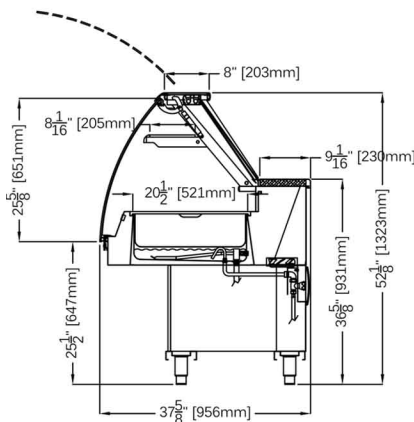




STANDARD FEATURES

Stainless steel insulated body with tubular painted galvanized chassis
Silver trim finish
Lift up hydraulic front glass
LED lighting
Plexiglass sliding doors
Stainless steel work bench
CS: dry warm top on stainless steel basin
CBM: hot well food warmer
CBM: each well has its own individual control to regulate the temperature
Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

Champagne trim finish
Stainless steel insert
Marble/Granite work counter
RAL color finish/wood laminate
Matching front cabinetry counters with top glass
Heated glass shelf with electronic control
Casters

CBM (BAIN MARIE): SHOWN WITH AUTO-FILL

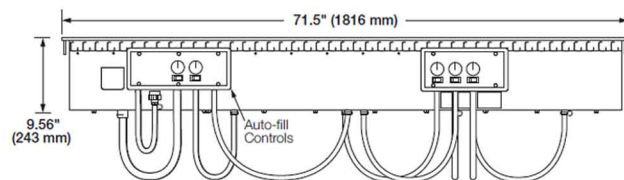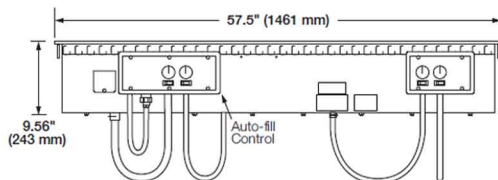

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



CLASSIC HOT (CS - DRY)				
TECHNICAL FEATURES		MODELS		
		CLASSIC CCS1000	CLASSIC CCS1500	CLASSIC CCS2000
External Dimensions (L-D-H)	Inches	39 1/2" - 37 3/4" - 52 1/8"	59 1/8" - 37 3/4" - 52 1/8"	78 3/4" - 37 3/4" - 52 1/8"
Inches-MM	MM	1000 - 956 - 1323	1500 - 956 - 1323	2000 - 956 - 1323
Crated Dimensions (L-D-H)	Inches	44" - 42 1/2" - 57"	65" - 42 1/4" - 57"	84 3/4" - 42 1/4" - 57"
Inches-MM	MM	1100 - 1056 - 1447	1600 - 1056 - 1447	2100 - 1056 - 1447
Power Supply	(V)	220V	220V	220V
Power Consumption	(W)	1550W	2070W	3080W
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	155Kgs / 241Lbs	206Kgs / 453Lbs	257Kgs / 565Lbs
Crated Weights	Kg/Lb	170Kgs / 374Lbs	226Kgs / 497Lbs	283Kgs / 622Lbs

NOTE: DIMENSIONS ARE WITHOUT SIDE PANELS

CLASSIC HOT (CBM - BAIN MARIE)				
TECHNICAL FEATURES		MODELS		
		CLASSIC CCBM1000	CLASSIC CCBM1500	CLASSIC CCBM2000
External Dimensions (L-D-H)	Inches	39 1/2" - 37 3/4" - 52 1/8"	59 1/8" - 37 3/4" - 52 1/8"	78 3/4" - 37 3/4" - 52 1/8"
Inches-MM	MM	1000 - 956 - 1323	1500 - 956 - 1323	2000 - 956 - 1323
Crated Dimensions (L-D-H)	Inches	44" - 42 1/2" - 57"	65" - 42 1/4" - 57"	84 3/4" - 42 1/4" - 57"
Inches-MM	MM	1100 - 1056 - 1447	1600 - 1056 - 1447	2100 - 1056 - 1447
Number of Wells (CBM) *	#	2	4	5
Power Supply **	(V/A)	208-220V / 12A	208-220V / 23A	208-220V / 29A
Power Consumption	(W)	2400W	4850W	6020W
Drain	--	3/4" Drain / 1" Manifold	3/4" Drain / 1" Manifold	3/4" Drain / 1" Manifold
Water Supply ***	--	1/4"	1/4"	1/4"
Net Weights	Kg/Lb	155Kgs / 241Lbs	206Kgs / 453Lbs	257Kgs / 565Lbs
Crated Weights	Kg/Lb	170Kgs / 374Lbs	226Kgs / 497Lbs	283Kgs / 622Lbs

NOTE: DIMENSIONS ARE WITHOUT SIDE PANELS

*** FLOOR SINK IS REQUIRED FOR WET APPLICATION**

**** AVAILABLE IN 3 PHASE CONFIGURATION**

***** AUTO FILL OPTION**

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com

