

Fusion

Product Specifications

ITEM NO: _____
PROJECT: _____
DATE: _____

Inline Refrigerated Service Case



MODEL SHOWN: FB4S-3R

- ☐ FB3S-2R
- ☐ FB4S-3R
- ☐ FB5S-4R
- ☐ FB6S-5R

Lengths include end panels
37"L x 43"D x 51-3/4"H
50"L x 43"D x 51-3/4"H
63"L x 43"D x 51-3/4"H
76"L x 43"D x 51-3/4"H

STANDARD FEATURES

- Remote w/thermostat, solenoid & TXV
- 15-5/8" Toe kick
- Blue Fin coated coil
- Condiment pan support rails
- Electrical leads
- Integrated average product temperature of 40°F or less
- NOTE: Pans not supplied with case.
- NOTE: Remote only available w/rail base w/shims. N/A w/levelers, casters or legs.
- One year parts & labor warranty
- Rail system for shims
- Rear wrapping board, white Sanalite®
- Stainless steel interior


Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
COUNTER	☐ Stainless steel	☐ 3 cm. Quartz
REAR STORAGE	☐ Non-refrigerated rear storage (w/o doors)	☐ Non-refrigerated rear storage w/ sliding doors ☐ Refrigerated rear storage w/ sliding doors
TOE KICK	☐ Painted - Black	☐ Stainless steel
SNEEZE GUARD	☐ Clear sneeze guard glass w/ stainless steel posts	☐ UV bonded frameless glass (3" glass gaps case-to-case)
REFRIGERATION	☐ Remote w/thermostat, solenoid & TXV	☐ Note: Remote doesn't incl Conds unit. Floor drain reqd.
MISCELLANEOUS		☐ Second year parts & labor warranty

Fusion


Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged refrigerated products	40

PLAN VIEW

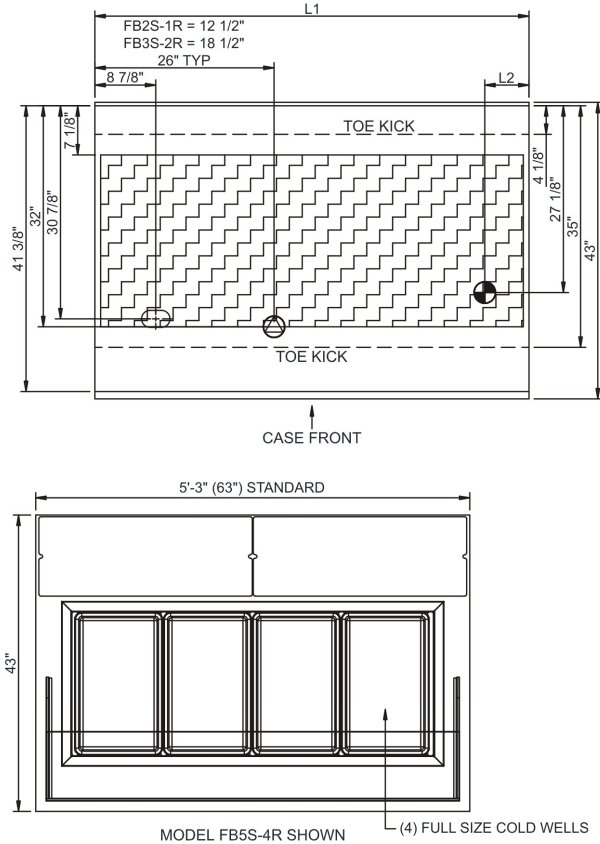

SIDE VIEW

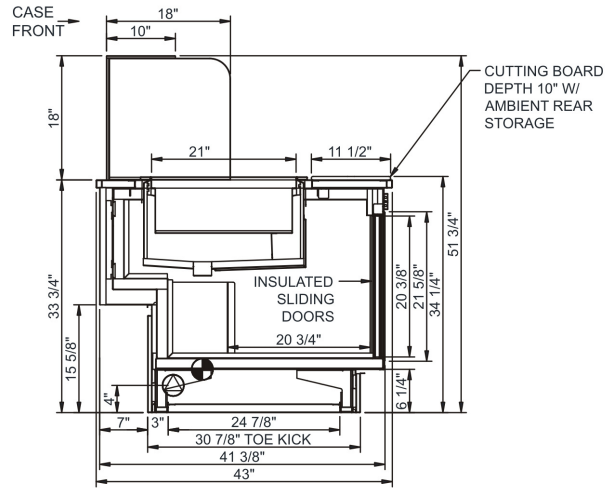

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>
- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
FB3S-2R	N/A	37.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.06	104	2+G	Leads Multiple	20.00	1123	1040	600
FB4S-3R	N/A	50.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.17	117	2+G	Leads Multiple	20.00	1296	1200	750
FB5S-4R	N/A	63.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.27	128	2+G	Leads Multiple	20.00	1469	1360	900
FB6S-5R	N/A	76.00	6.38	Remote(Type I)	Circuit #1	110-120	1	60	1.36	140	2+G	Leads Multiple	20.00	1642	1520	1,100

*** Does not include electric defrost on freezer models.

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- ⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

888 E. Porter Rd.
 Muskegon, MI 49441
 Ph. 231-798-8888
 Fx. 231-798-4960
www.structuralconcepts.com

Note: Information is subject to change at any time.
 Visit www.structuralconcepts.com for the most current specs.

Revised 3/27/2020

21413605

