

# VISION

## Deli/Pastry/Beverage Medium Temperature Showcases

### STANDARD FEATURES

- Triple pane glass on all sides
- Tempered glass shelving
- No defrost shut down requirement for low temp
- Dixell digital controller
- LED lighting
- Lockable casters
- Cases ship standard silver finish
- Available lengths: 26"L and 34"L

### OPTIONS

- Front and back access doors
- Custom color finish or stainless steel base
- Dual temp, all in one low and medium temp
- Adjustable legs



VISION MEDIUM TEMPERATURE									
TECHNICAL FEATURES		Single Door				Double Doors (Front & Back)			
		V6314 H60	V6314 H76	V8314 H60	V8314 H76	V6314D H60	V6314D H76	V8314D H60	V8314D H76
External Dimensions (L-D-H)	Inches	26" - 25 1/2" - 60"	26" - 25 1/2" - 76"	34" - 25 1/2" - 60"	34" - 25 1/2" - 76"	26" - 27 3/4" - 60"	26" - 27 3/4" - 76"	34" - 27 3/4" - 60"	34" - 27 3/4" - 76"
	MM	660 - 647 - 1524	660 - 647 - 1930	863 - 647 - 1524	863 - 647 - 1930	660 - 647 - 1524	660 - 647 - 1930	863 - 704 - 1524	863 - 704 - 1930
Crated Dimensions (L-D-H)	Inches	36" - 32" - 67"	36" - 32" - 80"	40" - 32" - 67"	40" - 32" - 80"	36" - 33" - 67"	36" - 33" - 80"	40" - 33" - 67"	40" - 33" - 80"
	MM	914 - 812 - 1701	914 - 812 - 2032	1016 - 812 - 1701	1016 - 812 - 2032	914 - 838 - 1701	914 - 838 - 2032	1016 - 838 - 1701	1016 - 838 - 2032
Refrigeration	Type	R404A	R404A	R404A	R404A	R404A	R404A	R404A	R404A
Operating Temperature	°F	38°F to 40°F	38°F to 40°F	38°F to 40°F	38°F to 40°F	38°F to 40°F	38°F to 40°F	38°F to 40°F	38°F to 40°F
Compressor	Nr./Type	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic
BTU'S @ +14°F Evap Temperature	BTU'S	1500 BTU'S	1500 BTU'S	1900 BTU'S	1900 BTU'S	1500 BTU'S	1500 BTU'S	1900 BTU'S	1900 BTU'S
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60
Power Consumption	(A)	8A	8A	9A	9A	9A	9A	10A	10A
Climatic Class	F°/H.R.	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%
Net Weights	Kg/Lb	215Kgs / 430Lbs	255Kgs / 510Lbs	240Kgs / 480Lbs	280Kgs / 560Lbs	250Kgs / 500Lbs	290Kgs / 580Lbs	280Kgs / 560Lbs	320Kgs / 640Lbs
Crated Weights	Kg/Lb	242Kgs / 485Lbs	282Kgs / 565Lbs	262Kgs / 525Lbs	302Kgs / 605Lbs	262Kgs / 525Lbs	302Kgs / 605Lbs	300Kgs / 600Lbs	340Kgs / 680Lbs

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com




## SINGLE DOOR

V6314 H60 & V8314 H60

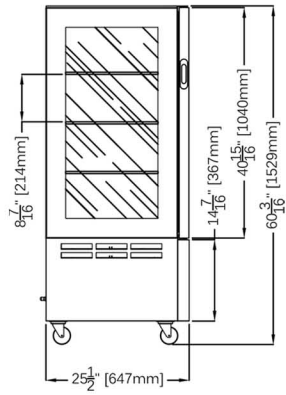


V6314 H76 & V8314 H76

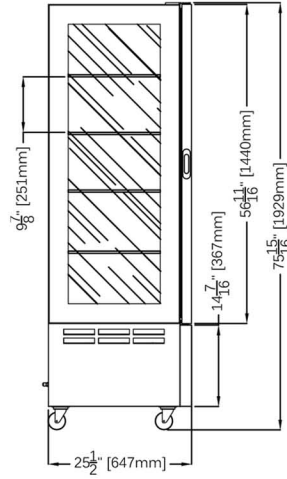


## DOUBLE DOORS

V6314D H60 & V8314D H60


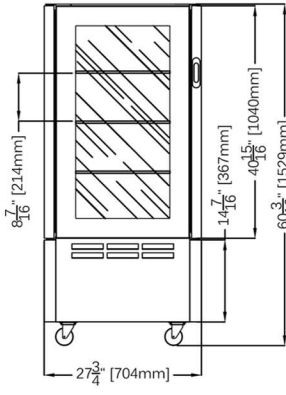


V6314D H76 & V8314D H76


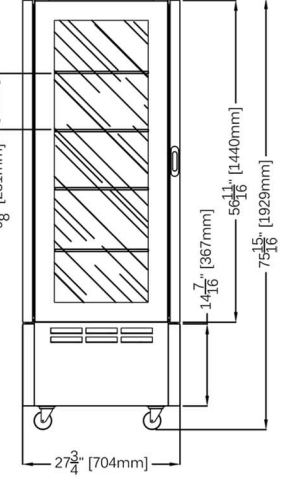


## PLAN VIEWS:

### SINGLE DOOR




### DOUBLE DOORS

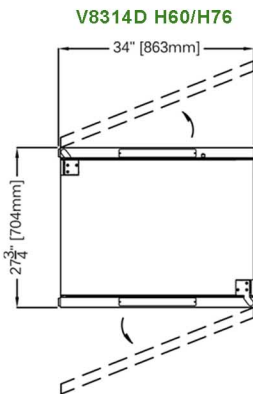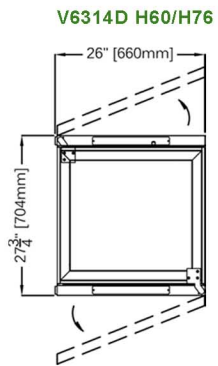


## REAR ELEVATIONS:


V6314 H60




V8314 H60



V6314 H76

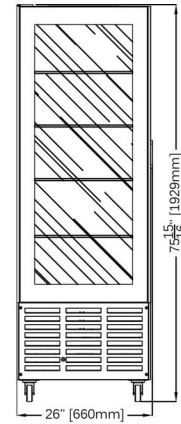


V8314 H76

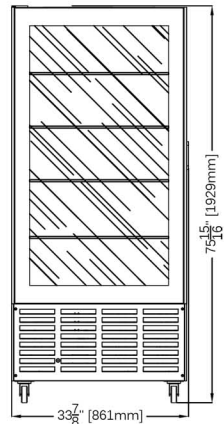


## FRONT ELEVATIONS:


V6314 H60




V8314 H60



V6314 H76

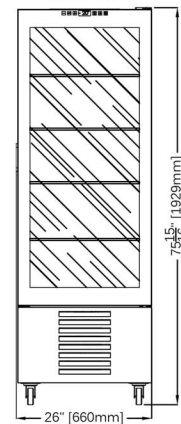

V8314 H76

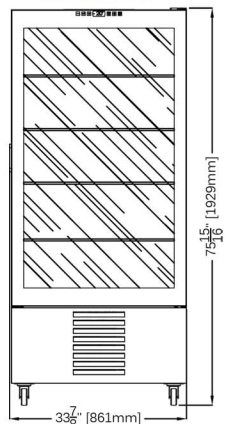

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

