



SUPERDECK SERIES STUBBY DEPTH 8" DECK HEIGHT GAS OVENS

SERIES: 151, 3151, 4151



Ideal for kitchens with narrow aisles, the Bakers Pride® stubby series pizza ovens are designed with a 33" depth to save space while accommodating the high-volume needs of traditional cook lines. Each oven chamber features one Cordierite deck with independently controlled top and bottom heat dampers for perfectly balanced results. Choose from three different deck areas and overall oven widths from 48" to 66" to suit your needs.

This series is constructed with heavy-duty, .25" angle iron frame, which is fully welded to allow for stacking up to three ovens. Oven exteriors are all heavy-duty stainless steel and are fully insulated for cooler outer temperatures and consistent interior temperatures. Options are available to accommodate the configuration of your kitchen, such as side-mounted controls and special-height legs.

FEATURES AT A GLANCE

- 48,000 or 70,000 BTUH with natural or LP gas (LP not CE approved)
- Stackable
- 300–650°F (148–343°C) temperature range
- 1.5" (38 mm) thick Cordierite decks
- 8" (203 mm) deck height
- Choose overall width: 48" (1219 mm), 57" (1448 mm) or 66" (1676 mm)
- Choose deck area: 36" x 24.5" (914 x 622 mm), 45" x 24.5" (1143 x 622 mm) or 54" x 24.5" (1372 mm)
- Combination gas controls with valve, regulator, and pilot safety
- Independently controlled top and bottom heat dampers
- Heavy-duty, slide-out flame diverters
- All stainless steel exteriors, aluminized steel interiors
- Spring-balanced, fully insulated doors
- Left-side or rear 3/4" (19 mm) NPT gas connection
- Heavy-duty steel legs finished with durable Bakertone
- Fully insulated throughout
- Two-year limited warranty

OPTIONS & ACCESSORIES


- Stainless steel leg covers (per pair)
- Special-height legs (per set of four)
- 150–550°F (65–287°C) bake thermostat
- Draft flue for direct vent (not available on CE units)
- Automatic oven starter
- Side-mounted controls (Specify when ordering.)
- Deck brush and scraper (48" (1219 mm) long with wood handle)
- Stainless steel wood chip box
- Legs with casters
- Lightstone decks
- Steel decks



SUPERDECK SERIES STUBBY DEPTH 8" DECK HEIGHT GAS OVENS

SERIES: 151, 3151, 4151

EQUIPMENT DIMENSIONS

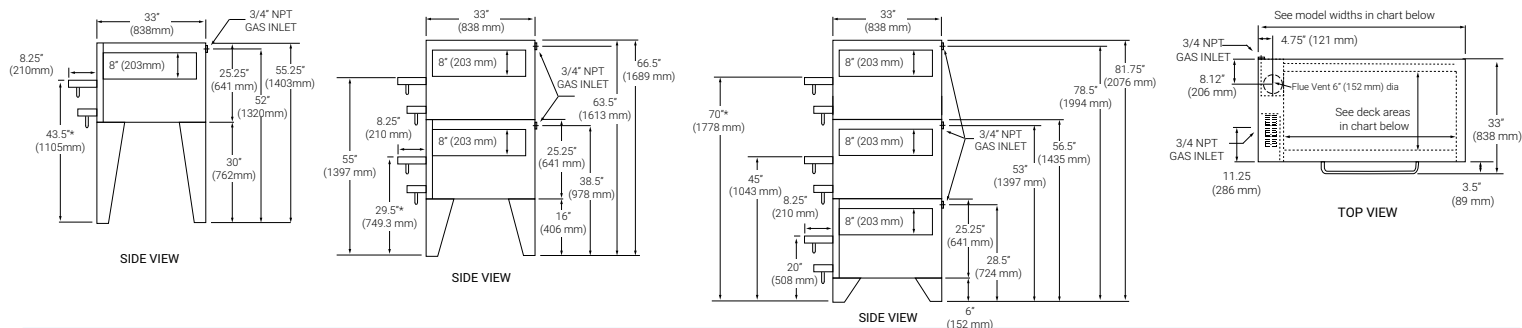

MECHANICAL SPECIFICATIONS

Model #	Overall Dim** (W x H x D)	Total BTUH***	kW***	Deck Height	Deck Size	Decks	Baking Chambers	Thermostat Range	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt. •
151	48" x 55.25" x 33" (1219 x 1403 x 838)	48,000	14	8" (203)	36" x 24.5" (914 x 622)	1	1	300°-650°F (149-343)	53" x 37" x 40" (1346 x 940 x 1016)	44.4	1.4	820 (372kg)
152	48" x 66.5" x 33" (1219 x 1689 x 838)	96,000	28	8" (203)	36" x 24.5" (914 x 622)	2	2	300°-650°F (149-343)	*	*	*	1508 (684kg)
153	48" x 81.75" x 33" (1219 x 2076 x 838)	144,000	42	8" (203)	36" x 24.5" (914 x 622)	3	3	300°-650°F (149-343)	*	*	*	2200 (998kg)
3151	57" x 55.25" x 33" (1448 x 1403 x 838)	70,000	21	8" (203)	45" x 24.5" (1143 x 622)	1	1	300°-650°F (149-343)	52" x 72" x 36" (1321 x 1829 x 914)	76.2	2.7	958 (435kg)
3152	57" x 66.5" x 33" (1448 x 1689 x 838)	140,000	41	8" (203)	45" x 24.5" (1143 x 622)	2	2	300°-650°F (149-343)	*	*	*	1787 (811kg)
3153	57" x 81.75" x 33" (1448 x 2076 x 838)	210,000	61.5	8" (203)	45" x 24.5" (1143 x 622)	3	3	300°-650°F (149-343)	*	*	*	2620 (1188kg)
4151	66" x 55.25" x 33" (1676 x 1403 x 838)	70,000	21	8" (203)	54" x 24.5" (1372 x 622)	1	1	300°-650°F (149-343)	52" x 72" x 36" (1321 x 1829 x 914)	76.2	2.7	1093 (496kg)
4152	66" x 66.5" x 33" (1676 x 1689 x 838)	140,000	41	8" (203)	54" x 24.5" (1372 x 622)	2	2	300°-650°F (149-343)	*	*	*	2050 (930kg)
4153	66" x 81.75" x 33" (1676 x 2076 x 838)	210,000	61.5	8" (203)	54" x 24.5" (1372 x 622)	3	3	300°-650°F (149-343)	*	*	*	3024 (1372kg)

•Each oven ships in separate carton as do the legs. Refer to the single unit for carton specs. Shipping weight shown includes all decks and legs.

•Height includes 30" (762 mm) legs on single units, 16" (406 mm) on stacked units, and 6" (152 mm) on triple stacked units. Add an additional 6" to height for flue stack depending on installation.

***CE certification not available in LP gas

GAS CONNECTIONS

3/4"
CE certification not available with LP gas
Each deck requires a separate gas connection

REQUIRED CLEARANCES

	Non-Combustible Construction	Combustible Construction
Left	0" (0 mm)	1" (25 mm)
Right	0" (0 mm)	3" (76 mm)
Back	2" (51 mm)	3" (76 mm)

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.



Freight Class: 77.5,
FOB Allen 75013

