

# Open Pan & Tray Racks

## Standard Series - Stainless Steel



Model 139

**Models** 127, 128, 129, 137, 138, 139, 157, 158  
159, 162, 163, 172, 173, 182, 183

### Durable, Efficient Storage System With All-welded Stainless Steel Construction

- All-welded construction, fully assembled
- Both channel and angle style ledges are electronically welded to the uprights to withstand continual use
- Tie bars are welded to the uprights to prevent warping
- Models available with 5" corner stem mount and recessed plate casters
- Stainless steel design is easy to clean and sanitize

### Ideal for...

- Hotels, central kitchens, hospitals and schools
- Refrigerated or dry storage
- Convenient sheet pan and tray transport



### Specifications:

Unit is all-welded construction and accommodates 18" x 26" pans or 14" x 18" pans and trays. Corner upright legs and top and bottom frame are of .104 x 3/4" x 1-1/4" angle stainless steel. Pan/tray ledges are of 16-gauge stainless steel and are welded to upright legs front and back. Top and bottom corner frame joints have 16-gauge reinforcing gussets welded in place for extra rigidity. Unit has a 16-gauge 1/2" x 1/2" angle stainless steel horizontal brace welded to upright legs at open ends front and back to prevent bowing. Casters are 5" diameter all-swivel. Unit is NSF listed.

### Optional Accessories

- Corner leg bumpers (4 ea.)
- Welded pan top rod
- Brake casters (2 ea.)
- Vinyl cover

Spec. #

AIA #


Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com

# Open Pan & Tray Racks

## Standard Series - Stainless Steel

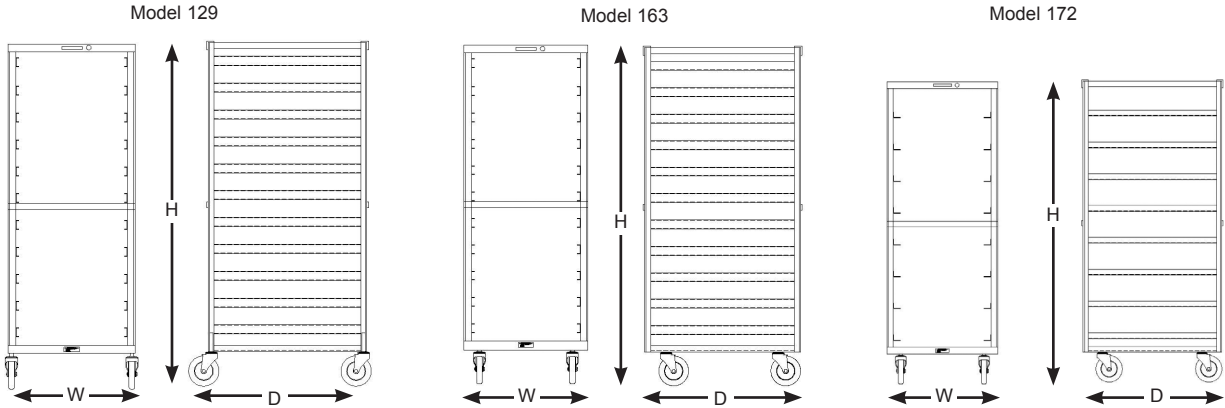

### Model Information

CAD symbols available through KCL CADalog

Model	Pan Capacity		Ledge Description			Overall Size			Lake-Glide® Casters		Case Weight	
	Full	Half	Type	Spacing	Width	W	D	H	Type	Dia.	Lbs.	(Kg)
127	24 ea.	48 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	29-1/4" (743)	43-1/2" (1105)	Corner Stem	5" (127)	56	(25.4)
128	35 ea.	70 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	29-1/4" (743)	58-1/2" (1486)	Corner Stem	5" (127)	73	(33.1)
129	41 ea.	82 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	29-1/4" (743)	68-1/2" (1740)	Corner Stem	5" (127)	78	(35.4)
137	11 ea.	22 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	29-1/4" (743)	43-1/2" (1105)	Corner Stem	5" (127)	53	(24)
138	16 ea.	32 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	29-1/4" (743)	58-1/2" (1486)	Corner Stem	5" (127)	70	(38.8)
139	20 ea.	40 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	29-1/4" (743)	68-1/2" (1740)	Corner Stem	5" (127)	80	(36.3)
157	7 ea.	14 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	29-1/4" (743)	43-1/2" (1105)	Corner Stem	5" (127)	45	(20.4)
158	10 ea.	20 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	29-1/4" (743)	58-1/2" (1486)	Corner Stem	5" (127)	57	(25.9)
159	12 ea.	24 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	29-1/4" (743)	68-1/2" (1740)	Corner Stem	5" (127)	62	(28.1)
162	37 ea.	74 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	26-1/4" (667)	62-1/2" (1588)	Recessed Plate	5" (127)	75	(34)
163	41 ea.	82 ea.	Channel	1-7/16" (37)	1/2" (13)	21" (533)	26-1/4" (667)	67-1/8" (1705)	Recessed Plate	5" (127)	82	(37.2)
172	18 ea.	36 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	26-1/4" (667)	62-1/8" (1578)	Recessed Plate	5" (127)	77	(34.9)
173	20 ea.	40 ea.	Angle	3" (76)	1-5/16" (33)	21" (533)	26-1/4" (667)	67-1/8" (1705)	Recessed Plate	5" (127)	80	(36.3)
182	11 ea.	22 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	26-1/4" (667)	62-1/8" (1578)	Recessed Plate	5" (127)	60	(27.2)
183	12 ea.	24 ea.	Angle	5" (127)	1-5/16" (33)	21" (533)	26-1/4" (667)	67-1/8" (1705)	Recessed Plate	5" (127)	65	(29.5)

Measurements in ( ) denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.  
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
 800-558-8565 • 414-902-6400 • Fax 414-902-6446  
 info@eLakeside.com • www.eLakesideFooservice.com