



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



315-FCP-25-N7

OPTIONS:

- ☐ Sliding doors with compressor compartment
- ☐ Door locks
- ☐ * Condensate evaporator
- ☐ Designer Foodshields
- ☐ Trayslides
- ☐ Adapter bars
- ☐ Adapter panels
- ☐ Stainless steel carving boards
- ☐ Wood carving boards
- ☐ Kick plates
- ☐ 5" casters, 2 swivel w/locks, or 4/locks
- ☐ Stainless steel dish shelf
- ☐ Drop brackets on tray slide
- ☐ False bottom - perforated, stainless
- ☐ Veneered plastic laminate panels on body
- ☐ Special powder coat painted body
- ☐ Body latches - 14695

Certifications:



UL/ANSI NSF4

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com
SS-1260 AeroServ Flushmount Cold Pan

Specification subject to change



WARNING For CA residents: go to
www.dukemfg.com/prop65 for prop 65 warning

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

AeroServ Serving Systems
Flushmount Cold Pan

- 314-FCP-25-N7 32" Long 2 Sections
- 315-FCP-25-N7 46" Long 3 Sections
- 316-FCP-25-N7 60" Long 4 Sections
- 327-FCP-25-N7 74" Long 5 Sections
- 328-FCP-25-N7 88" Long 6 Sections

BODY:

- 20 gauge, 300 Series stainless steel
- Cutout, flanged down & attached to liner of cold pan
- Flanged or channeled edges
- Welded together with local reinforcements
- Compressor compartment with removable louvered grille
- Mounted on 6" stainless steel legs with adjustable feet
- ☐ Stainless steel
- ☐ Paint grip
- ☐ Choice of available powder coat colors

LINER:

- 18 gauge, 300 Series stainless steel
- Accepts up to 6" deep food pans
- Insulated on all four sides and bottom
- Drain for each well manifolded to one location
- Condensing unit, refrigerant coil, controls, electric cord and plug - NEMA 5-15,
- R448a Refrigerant
- Food pans flush with top (not recessed)

CONTROL:

- Touchscreen control left justified in apron
- Simple touch screen control with 3 preset LOW/MED/HIGH temperature settings.



Flushmount Cold Pan

LEGEND


▲ ELECTRIC CONNECTION POINT SINGLE PHASE

ELECTRICAL SPECIFICATIONS


*If optional condensate evaporator add 300 Watts, 2.6 Amps

Model	120 Volt		
	Watts	Amps	NEMA
314-FCP-25-N7	432	3.7	5-15
315-FCP-25-N7	576	4.9	5-15
316-FCP-25-N7	576	4.9	5-15
327-FCP-25-N7	576	4.9	5-15
328-FCP-25-N7	576	4.9	5-15


TOP VIEW

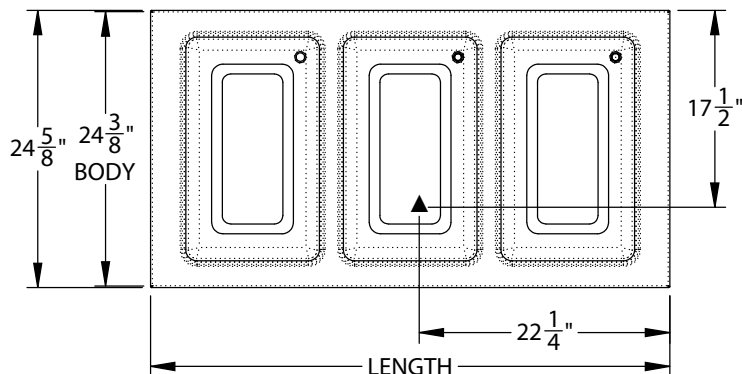

FRONT VIEW

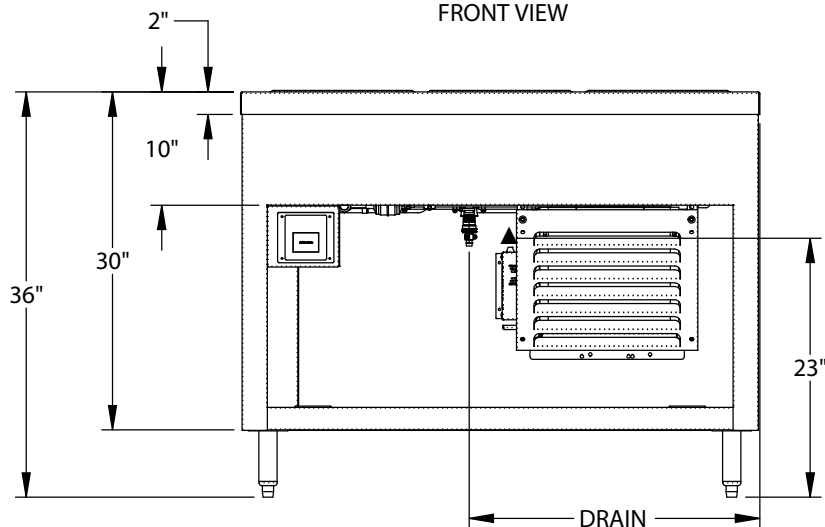

SIDE VIEW

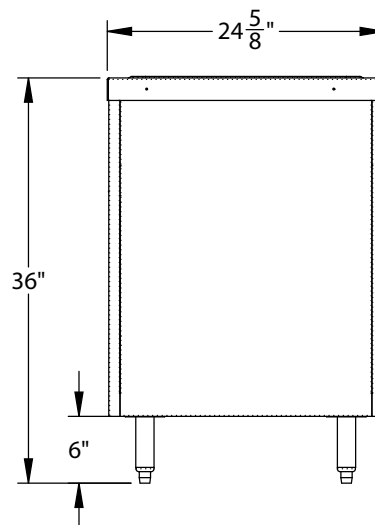

DIMENSIONS:

Freight Class: 115

Model	Length		Width		Height		Drain	Cube ft. crated	Weight	
	in	cm	in	cm	in	cm			lbs	kg
314-FCP-25-N7	32	81.3	24.63	62.55	36.00	91.4	22.15	34.8	255	115.9
315-FCP-25-N7	46	116.8	24.63	62.55	36.00	91.4	25.56	47.7	354	160.9
316-FCP-25-N7	60	152.4	24.63	62.55	36.00	91.4	25.56	60.5	425	193.2
327-FCP-25-N7	74	188.0	24.63	62.55	36.00	91.4	25.56	73.3	518	235.5
328-FCP-25-N7	88	223.5	24.63	62.55	36.00	91.4	25.56	86.2	580	263.4



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2023, Duke Manufacturing Co.