

Job: _____

Item: _____

Quantity: _____

Tray Drying Rack -- Correctional Duty

These racks conveniently stack pans and trays for drying without contact, allowing air to circulate freely for faster drying and to reduce pan-to-pan contamination.

- Framework is constructed out of 1½" x 1¾" x .070" wall tubing.
- Angle tray guides are .090" thick and are spaced on 1½" and 2¾" centers.
- Racks come equipped with four 6" x 2" platform type swivel casters.
- **Lifetime Guarantee** against rust and corrosion.
- **Five-Year Guarantee** against workmanship and material defects.
- NSF Certified.



#96704

Model No	Size ** W-H-D	Tray Levels	Guide Clearance	Tray Cap.	Ship Lbs.
96704	28½" x 64" x 58¼"	3	2.65"	120*	203
96705	28½" x 82" x 58¼"	4	2.65"	160*	249
96706	28½" x 64" x 69¼"	3	2.65"	144*	229
96707	28½" x 82" x 69¼"	4	2.65"	192*	283
96708	28½" x 64" x 63½"	3	1.4"	240*	228
96709	28½" x 82" x 63½"	4	1.4"	320*	282
96710	28½" x 64" x 75½"	3	1.4"	288*	263
96711	28½" x 82" x 75½"	4	1.4"	384*	325

Four 6" x 2" heavy duty platform type swivel casters (#C490) with tamper proof fasteners.

* Note: Tray Capacity is based on two, compartmented or insulated trays per slot.

** Height varies, based on tray size, confirm with factory when ordering.

Above height is based on a 16" tray.

These Tray Drying Racks are built-to-order and cannot be returned.


Options:

Caster Locks (2) -- Add "CL" suffix to model #.

Perimeter Bumper -- Add "PB" suffix to model #.


Vertical Bumpers (4) -- Add "VB" suffix to model #.

Note: The bottom drainage channel is removed when perimeter and corner bumpers are used.

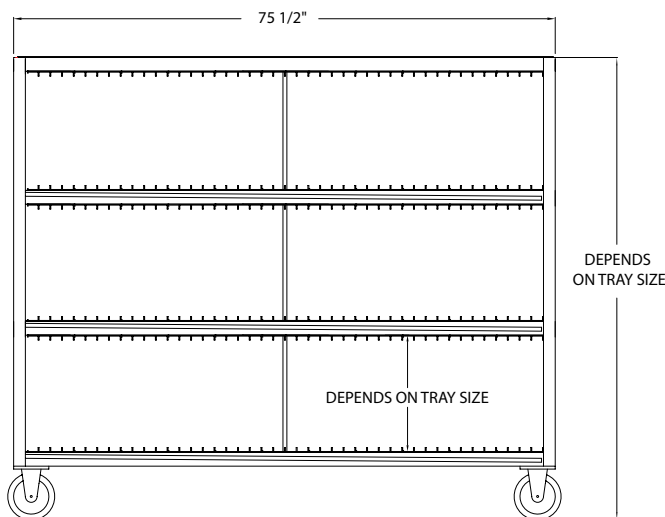

#96710

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.



Distributed by: