

# Refrigerated Countertop Rail CPR Series



Item # \_\_\_\_\_

- CPR-4
- CPR-8
- CPR-60-4

## Standard Features

- Our “CPR” series counter top display is designed for durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean and safe food environment. Covered corner floor to meet NSF requirements.
- Elegant top surface with mirror stainless steel finish and full color display.
- Refrigeration is designed to maintain 33° to 41°F in the pans at all times.
- Digital temperature controller with automatic defrost and temperature display to keep food quality for a longer period of time.
- Static refrigeration system to keep pans at NSF required temperatures.
- High density CFC-free polyurethane insulation and balanced CFC-free refrigeration system, R-134A.
- Units come standard with clear poly carbonate 1/6 size pans. CPR-60-4 comes with (4) 4” deep pans, with lid for serving utensil. CPR-4 come with (4) 4” deep pans and CPR-8 with (8) 4” deep pans. Both with lids.
- Mounted on 1/2” adjustable legs.



CPR-4



CPR-8



CPR-60-4

## Options & Accessories

- 220 volts / 50 cycles / 1 phase



\*Conforms to UL & NSF-7 standards

Countertop Rails	Model	Capacity (Pans)	Amps	HP	Volt	Cabinet Dimensions W / D / H			Crated Weight (Lbs.)
	CPR Series								
	<b>CPR-4</b>	4	2.5	1/6	115	15-3/4"	26-1/8"	11-1/4"	66
	<b>CPR-8</b>	8	2.5	1/6	115	28-1/8"	26-1/8"	11-1/4"	108
	<b>CPR-60-4</b>	4	2.5	1/6	115	28-1/8"	16"	10"	60

\* Height does not include 1" for bumper. \*\* All specifications are subject to change without notice.

# Refrigerated Countertop Rail

## CPR Series



### Specifications

#### Construction

Heavy duty stainless steel exterior front, sides and back. Interior completely constructed of heavy duty stainless steel with covered cornered floor. Unit comes complete with a 2" CFC-Free polyurethane insulation, foamed in place.

#### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a) Bottom mount condensing unit and static cold wall coils are located on the bottom.

Refrigerator is designed to maintain temperatures between 33° F to 41° F during normal operations at an ambient temperature of 85° F.

Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

#### Pans

CPR-60-4 includes (4) clear poly carbonate 1/6 size pans, 4" deep, with lid. CPR-4 comes with (4) clear poly carbonate 1/6 size pans, 4" deep, with lid.



CPR-8 comes with (8) clear poly carbonate 1/6 size pans, 4" deep, with lid.

#### Others




Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard with non adjustable feet.

#### Warranty




1 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

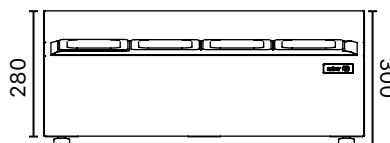


CPR-4

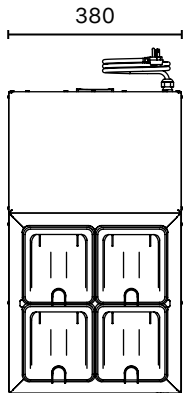

CPR-60-4

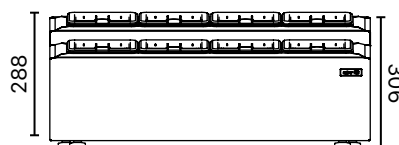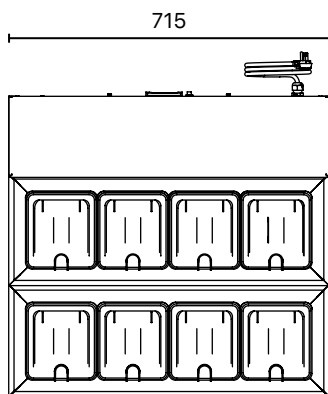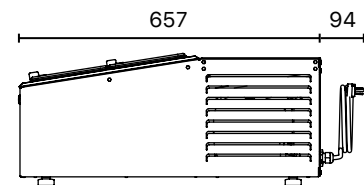

CPR-8

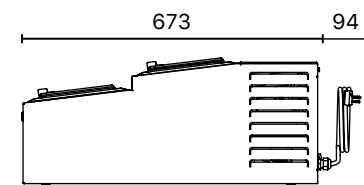

The manufacturer reserves the rights to modify materials and specifications without notice.