

• B3924RH

39"L x 26-1/8"D x 62-5/8"H



B3924RH

### Included

- Blue Fin coated coil
- Breeze w/EnergyWise s/c refrigeration
- Compressor air lower front intake and upper front discharge. Front panel cannot be blocked
- Condensate pan (self-contained refig. only)
- Integrated average product temperature of 160°F in hot section and 40°F or less in cold
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Shelving removable and adjustable on 1" centers
- Stainless steel interior
- Top light (matches shelf lights)



Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Laminated (non-premium) Confirm pattern/grain direction	• Laminated (premium) Confirm pattern/grain direction • Stainless steel (includes lower front panel)
<b>LOWER FRONT PANEL COLOR</b>	• Painted - Black	• Stainless steel (w/stainless ext. only)
<b>BASE</b>	• Casters w/ levelers	
<b>END PANEL LEFT</b>	• Full end panel w/mirror interior (metal edge matches interior color)	• Cutaway end panel (metal edge matches interior color)
<b>END PANEL RIGHT</b>	• Full end panel w/mirror interior (metal edge matches interior color)	• Cutaway end panel (metal edge matches interior color)
<b>EXTERIOR BACK PANEL</b>	• Solid back panel, black	• Rear loading swing out doors (black) • Rear loading swing out doors (stainless)
<b>SHELVING - HEATED SIDE</b>	• Individually controlled heated solid shelves (3), non-lighted	
<b>SHELVING - REF. SIDE</b>	• Metal shelves (3), lighted (LED)	
<b>LIGHTS - HEATED SIDE</b>	• Header only, LED 3500K w/ frosted lens	
<b>LIGHTS - REF. SIDE</b>	• LED 3000K w/ frosted lens	• LED 3500K w/ frosted lens • LED 4000K w/ frosted lens
<b>ELECTRICAL CONNECT</b>	• 6' Straight blade power cord (self-cont.)	
<b>MISCELLANEOUS</b>		• Second year parts & labor warranty (excludes compressor)
<b>ACCESSORIES</b>		• 1" Boston bumper, black

**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40
2	Packaged heated product	160

PLAN VIEW

SIDE VIEW

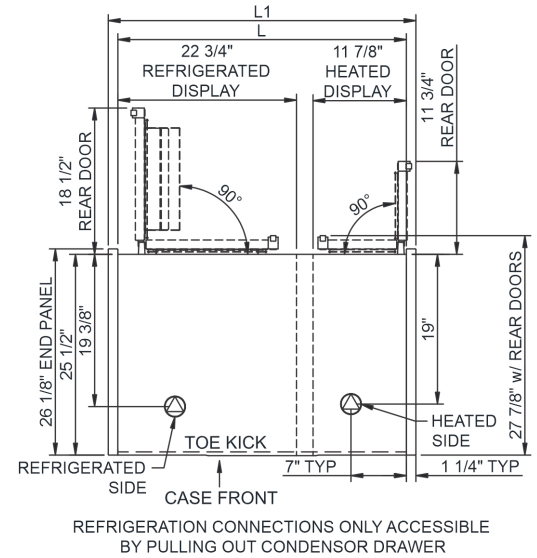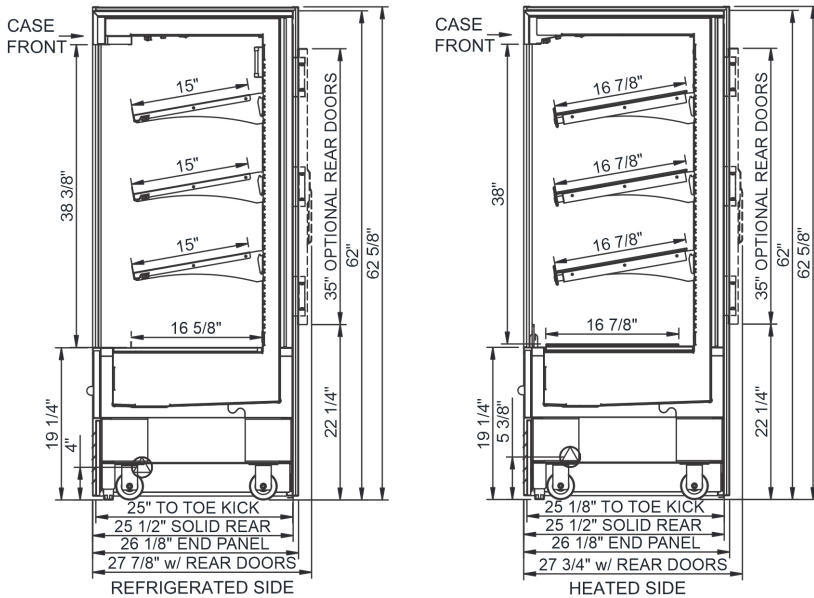

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6' LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

**Model Technical Specifications**

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTU/H	Para. Rack RTU/H	Est Wt		
B3924RH	36.50	39.00	.00	Self-Contained (N/A)	Circuit #1	110-120	1	60	20.69	1,792	2+G	5-30P or L5-30P	N/A	N/A	N/A	N/A

\*\*\* Does not include electric defrost on freezer models.

**Regulatory Approvals:**

All Models ETL Listed to UL 197  
ETL Listed to CAN/CSA 22.2 No. 109  
ETL Sanitation to NSF/ANSI 4



**Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**Note:** Information is subject to change at any time. Visit [www.structuralconcepts.com](http://www.structuralconcepts.com) for the most current specs.

21902015 Revised 4-25-2022