



## Specification

### 7013(200120) Insulated Holding Cabinet



- ◆ Designed for holding.
- ◆ Digital Electronic Controls, select a variety of holding temperatures.
- ◆ Temperature even design without fan to keep food fresh & moisture.
- ◆ Control features indicator lights for the hold function.
- ◆ Side racks with fifteen pan positions spaced on 1-1/2"(38mm) centers per compartment.
- ◆ Solid door with magnetic door latch, Zinc Alloy Machined handle.
- ◆ Heavy duty 5" casters, two swivel with brakes, Two Rigid. Provides mobility when fully loaded.
- ◆ temperature range 70F~200F.
- ◆ Made of stainless steel.



**Intertek**

CONFORMS TO NSF/ANSI 4

**Note: Dimensions and Specification are subject to change without notice.**


This Energy Efficient Full size cabinet has two individual, dual controlled, featuring a uniform heat source that maintains close temperature tolerances throughout the holding function. As a result, consistent holding offers low shrinkage of bulk or portion-cut protein items, higher food moisture content and significantly longer holding life. Max temperature 200F.




## Specifications

### 7013(200120) Insulated Holding Cabinet


Front View

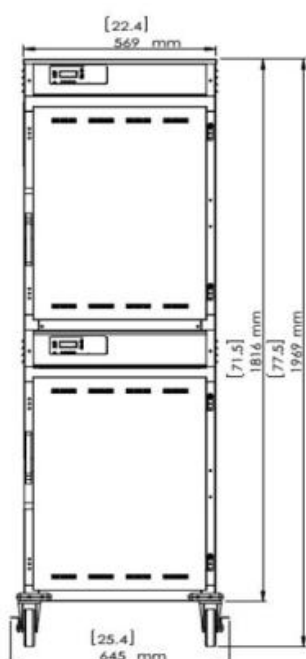

Side View

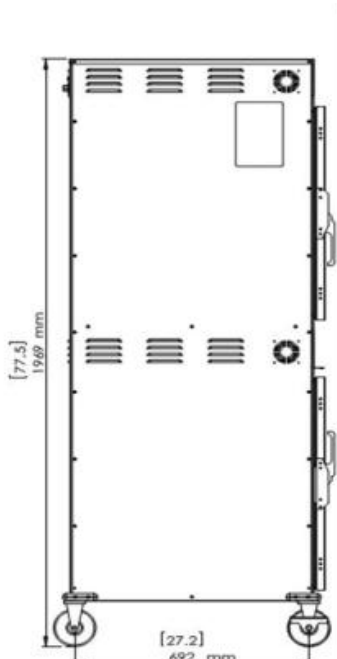

Top View

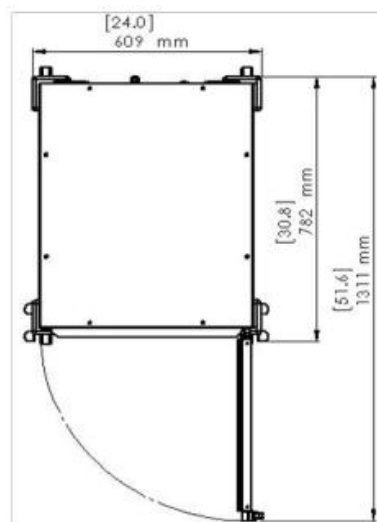

Pan Capacity	18" x 26" x1	15 PCS.
Per Compartment	20" x 12" x2-1/2	8PCS
	20" x12" x4	4 PCS.
	20" x*12" x6	4 PCS
Electrical	120 Volts,15Amps,60Hz	
Power	1800 Watts	
Cord MEMA	5-20P plug	
Net weight	344 lbs(170KG)	
Gross shipping weight	375 lbs(185KG)	
Class	100	
Dimensions	25.4" W x 31"D x 77.5" H	
Package	26" W x 33"D x78" H	
Warranty	1 year manufactures limited Warranty	