



NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-6149 FAX
www.norlake.com

ADVANTEDGE™ REACH-IN FREEZERS



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: NLF23-S, NLF49-S, NLF72-S

- **Exterior finish:** Exterior front, sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- **Interior finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** Complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self adjusting magnetic gaskets; 4" dia. casters (4 casters on one and two door models and 6 casters on three door model). 4 vinyl coated shelves per door section.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door frame heater wires. An interior incandescent light is activated by a switch for each door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Refrigerant flow is controlled by a capillary tube. R290 refrigerant. Operating temperature range: -5°F to 0°F.
- **Approvals:** UL, C-UL, ETL Sanitation, and ENERGY STAR® qualified.

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Door opening heaters
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
- Operating temperature range: -5°F to 0°F
- Polyurethane insulation
- R290 refrigerant
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation & ENERGY STAR® qualified
- Warranties: 3 year parts and labor, 5 year compressor

OPTIONAL FEATURES*


- Extra shelves
- Field reversible hinge kit for single door models (part # 146524)
- Pan slide rack (part # 146515)

* Most options are available two weeks from receipt of order. Please contact us for specific questions.


** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

**ETL-Sanitation is Intertek Laboratories Safety Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.


1, 2 & 3 DOOR FREEZERS




**NLF23-S
FRONT**




**NLF23-S
TOP**

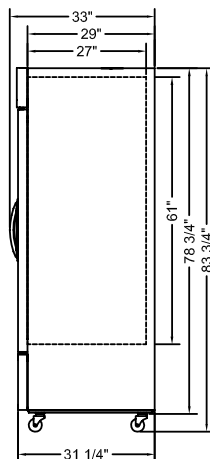


**SIDE VIEW
ALL MODELS**

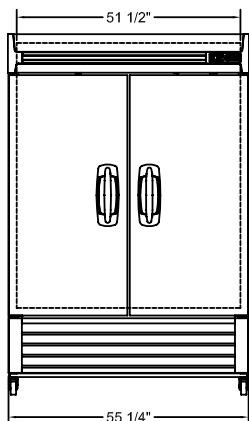


**NLF49-S
FRONT**



**NLF49-S
TOP**

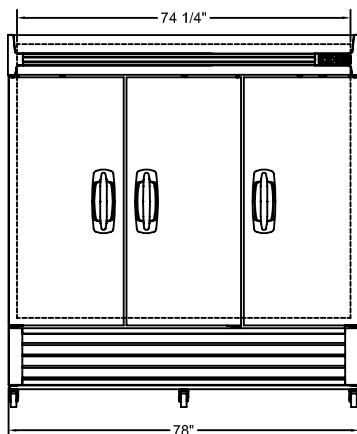

**NLF72-S
FRONT**

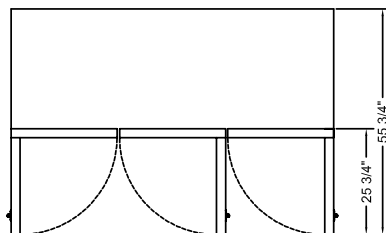

**NLF72-S
TOP**

SPECIFICATIONS

Models	NLF23-S	NLF49-S	NLF72-S
Crated Weight (lbs) (kg)	322 (146)	498 (226)	672 (305)
Crated Height (in) (cm)	84 (214)	85 (216)	85 (216)
Crated Width (in) (cm)	30 (77)	59 (149)	82 (207)
Crated Depth (in) (cm)	36 (91)	35 (88)	35 (88)
Interior Height (in) (cm)	61 (153)	61 (153)	61 (153)
Interior Width (in) (cm)	23-3/4 (59)	51-1/2 (129)	74-1/4 (186)
Interior Depth (in) (cm)	27 (68)	27 (68)	27 (68)
Overall Height (in) (cm) *	83-3/4 (209)	83-3/4 (209)	83-3/4 (209)
Overall Width (in) (cm)	27-1/2 (69)	55-1/4 (138)	78 (195)
Overall Depth (in) (cm)	33 (83)	33 (83)	33 (83)
Gross Cubage (CuFt) (L)	23 (651)	49 (1387)	72 (2002)
Number of Shelves	4	8	12
Shelf Area (SqFt) (Sqm)	18 (1.67)	39 (3.6)	56.5 (5.25)
Number of Casters	4	4	6
Condensing Unit Size	3/5 HP	3/4 HP	1 HP
Refrigerant	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/ 1
Cord & Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-20P
Total Amp Draw	8.0	10.5	14.0

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters.



Standex
Food Service Equipment Group

Revision Date: 3/20
Part Number: 138687

©2020 Nor-Lake, Inc. A division of Standex International Corp. All rights reserved.
Printed in the USA.