DESIGNER LINE REFRIGERATOR

Designer line

Model: D2RSNHD Natural Refrigerant R-290 Model

2-Section Reach-In Refrigerator with Half Doors - Shallow Depth

D2RSNHD - Stainless steel front, aluminum end panels and interior D2RSNSAHD - Stainless steel exterior, aluminum interior D2RSNSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Casters	
Additional epoxy coated steel shelves	Custom laminates	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Standard depth (consult factory)	Correctional Facility Options	
Full doors	One way security screws	
Hinged glass door (consult factory)	Locking hasp (lock not included)	
Rehinging of doors (consult factory)	Stainless steel mesh cover	
Wine rack	Coverless hinges	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system (coil in the cabinet zone) Natural, environmentally safe, high efficiency R-290 refrigerant¹ Automatic, electric condensate evaporator Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles Cam action, lift off hinges Self-closing doors Magnetic snap-in Santoprene™ door gaskets Cylinder lock in each door Heavy duty pilaster strips Heavy duty, epoxy coated steel shelves Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting Electronic controller with digital display & hi-low alarm Off-cycle defrost

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 32 (906 cu l) Width, Overall (inches) 52 (1321 mm) Depth, Overall (inches) 29 1/4 (743 mm) (including handles) Depth (inches) (less doors) 25 7/8 (657 mm) Depth (inches) (doors open 90°) 49 ½ (1257 mm) Clear Door Width (inches) 19 3/8 (492 mm) Clear Door Height (inches) 58 5/8 (1489 mm) Height, Overall (inches) 83 1/4 (2115 mm) (including 6" legs) 4 Number of Door(s) Number of Shelves 6 Shelf Area (square feet) 40.8 (3.8 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2560

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	8.1 (4.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu l)
Weight Std - Crated (pounds)	535 (243 kg)
Weight SS - Crated (pounds)	615 (279 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road

Bensalem, PA 19020 www.continentalrefrigerator.com

> udly Designed and embled in the USA



Equipped with one NEMA-5-15P Plug (varies by country)





Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

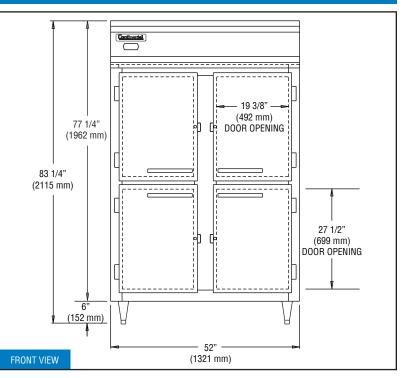

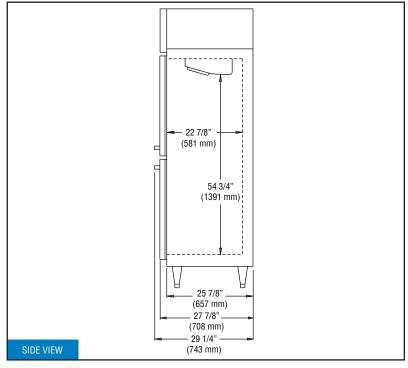

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.