


CLASSIC

Gelato Showcase

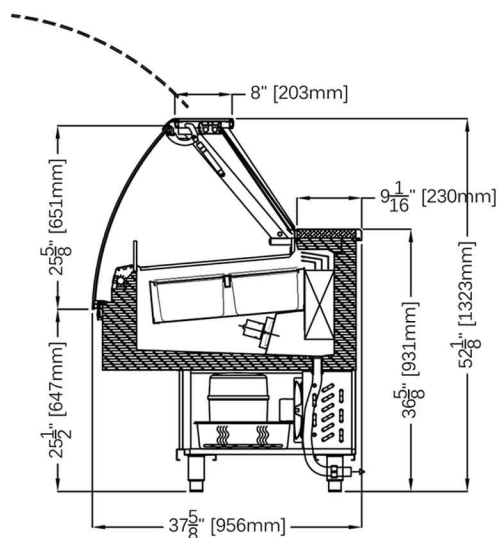

STANDARD FEATURES

Stainless steel insulated body with tubular painted galvanized chassis
Silver trim finish
Dixell digital controller
Air cooled condensing unit
Temperature front and side glass single pane with anti-fog serigraph
Lift up hydraulic front glass
LED lighting
Temperd glass shelves when applicable
Plexiglass sliding doors
Stainless steel work bench
Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

Champagne trim finish
Stainless steel inserts and pans
Dip well
Cone holder
Frozen cake stainless steel trays
Dual temperature zone
Marble/granite work counter
RAL color finish/wood laminate
Roll down curtain
Remote/water cooled unit
Matching front cabinetry counters with top glass
Casters



CLASSIC GELATO					
TECHNICAL FEATURES		MODELS			
		CLASSIC CG1000	CLASSIC CG1500	CLASSIC CG2000	CLASSIC CG2000DT
External Dimensions (L-D-H)	Inches	39 1/2" - 37 3/4" - 52 1/8"	59 1/8" - 37 3/4" - 52 1/8"	78 3/4" - 37 3/4" - 52 1/8"	78 3/4" - 37 3/4" - 52 1/8"
	Inches-MM	1000 - 956 - 1323	1500 - 956 - 1323	2000 - 956 - 1323	2000 - 956 - 1323
Crated Dimensions (L-D-H)	Inches	44" - 42 1/2" - 57"	65" - 42 1/4" - 57"	84 3/4" - 42 1/4" - 57"	84 3/4" - 42 1/4" - 57"
	Inches-MM	1100 - 1056 - 1447	1600 - 1056 - 1447	2100 - 1056 - 1447	2100 - 1056 - 1447
4 Liter Pan Capacity*	Pan Configuration	10	16	22	22 (11+11)
10 1/8" x 6 1/8" x 5 7/8" (258mm x 156mm x 150mm)					
5 Liter Pan Capacity*	Pan Configuration	7	11	16	7 7
14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)					
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	(2) -18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	2 / Hermetic
BTU'S @ -25°F Evap Temperature	BTU'S	2450 BTU'S	3580 BTU'S	4550 BTU'S	1984 BTU'S
		400/3/50 (EU)	400/3/50 (EU)	400/3/50 (EU)	400/3/50 (EU)
Electric Supply	(V/Ph/Hz)	208-220/1/60 (USA)	208-220/1/60 (USA)	208-220/1/60 (USA)	208-220/1/60 (USA)
Power Consumption	(W/A)	1950W / 5A	3200W / 5A	3800W / 9A	5000W / 12A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	R.	4/30/86/55%	4/30/86/55%	4/30/86/55%	4/30/86/55%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	190Kgs / 418Lbs	230Kgs / 507Lbs	270Kgs / 595Lbs	300Kgs / 661Lbs
Crated Weights	Kg/Lb	290Kgs / 639Lbs	360Kgs / 793Lbs	425Kgs / 936Lbs	455Kgs / 1003Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS

* PANS NOT INCLUDED

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

