BEVERAGE-AIR

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD24HC Solid Door Single Tower With Faucet Hydrocarbon Series



OPTIONS & ACCESSORIES

- Stainless steel interior lining
- Stainless steel back
- Wine/coffee models
- Glass door
- Faucet locks
- Glass rinser
- Right or left hinged door
- Sub-top
- No draft arm/hole cover
- 1-4 Tap tower
- 2, 3 & 4 way manifolds
- Dial/digital thermometer



Please verify qualifying units by visiting: www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

3 Year Parts/Labor Warranty

Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsill are heavy-duty stainless steel
- Full electronic control
- Single tower with faucet
- 3-in-1 Draft solution uses a single stainless-steel tap to serve • different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Four-inch (4") heavy duty casters standard
- Door lock
- Self-closing door with 120° stay-open feature
- · Magnetic gaskets provide positive door seal
- Field reversible door (hinge kit not included)

REFRIGERATION SYSTEM


- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil •
- Maintains product temperatures between 36°F and 38°F

MODEL: DD24HC-1-B




MODEL	DD24HC-1-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	24"	
Depth Overall	30 1⁄8"	
Height Overall (floor to top of tap)	53"	
Number of Doors	1	
Depth with Door Open 90°	50 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	7.66	
Internal Width Overall (in)	20"	
Internal Depth Overall (in)	22 ¼"	
Internal Height Overall (in)	23 ½"	
Number of 1/2 Kegs	1	
ELECTRICAL DATA		
Full Load Amperes	2.0	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1094	
Heat Rejection (BTU/Hr)	1641	
Charge (lbs/grams)	0.1213/55	
SHIPPING DATA		
Gross Weight - Crated	174 lbs	
Height - Crated	46"	
Width - Crated	32"	
Depth - Crated	27"	

*NOTE: Refrigerant must be specified at time of order.



Bar Equipment-Direct Draw Beer Dispenser Model: DD24HC-1-B

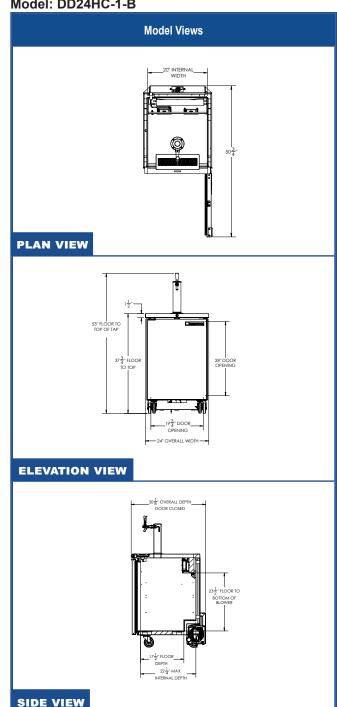

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Compar

