


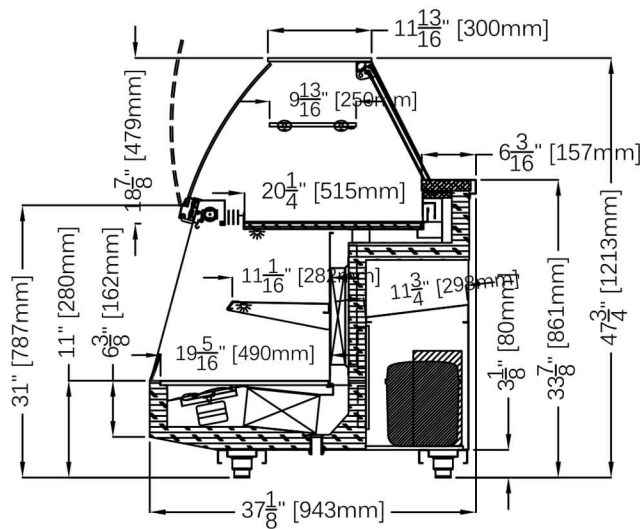

STANDARD FEATURES

Similar side profile with Classic & Classic II line
LED lighting top canopy & top shelf
LED lighting on lower canopy & intermediate shelf
Tilt back front glass
Hermetic air cooled condensing unit
Forced air refrigeration
Refrigerated deck
Front, top and side double glasses
Adjustable legs
Dixell control with diagnostic
Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

Non-refrigerated top
Self-rolling night curtain
Condensate water tray with automatic evaporating system
S/s steps for display area
Hot glass shelves with electric control
Remote condensing unit
RAL color/laminate front and sides
Casters

CLASSIC & CLASSIC II COMBI			
TECHNICAL FEATURES		MODELS	
		CCOMBI1150	CCOMBI1650
External Dimensions (L-D-H)	Inches	45 1/4" - 37 1/8" - 47 3/4"	65" - 37 1/8" - 47 3/4"
Inches-MM	MM	1150 - 943 - 1213	1650 - 943 - 1213
Crated Dimensions (L-D-H)	Inches	54" - 46" - 63 1/4"	71" - 46" - 63 1/4"
Inches-MM	MM	1371 - 1092 - 1346	1803 - 1092 - 1346
Top Refrigeration Display Area	Type	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck / Lower Shelf	Deck / Lower Shelf
Open Area & Top Deck			
Operating Temperature	°C / °F	+4°C / 39.2°F	+4°C / 39.2°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic
Cooling Power @+10°C/+14°F	(W/BTU'S)	1350W / 4350BTU'S	1680W / 5320BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)
Power Consumption	(A)	9A	13A
Defrost	Mode/Type	Electric	Electric
Climatic Class	N°/°C/F°/H.R.	4+ / 35/95/70%	4+ / 35/95/70%
Refrigerant Gas	Type	R404A	R404A
Net Weights	Kg/Lb	266Kgs / 586Lbs	350Kgs / 771Lbs
Crated Weights	Kg/Lb	391Kgs / 862Lbs	525Kgs / 1157Lbs

* Dimensions are without side panels

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

