


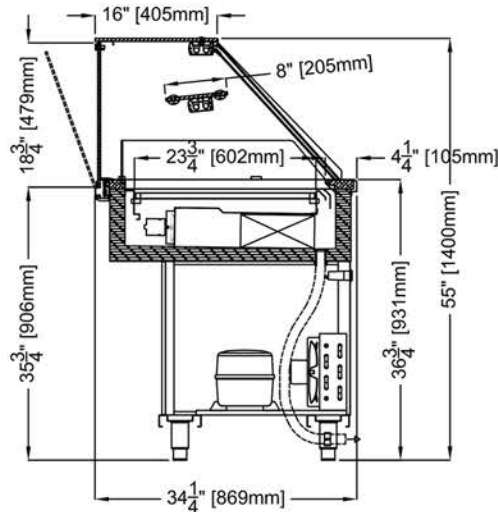

## STANDARD FEATURES

- LED lighting system
- Extra clear glass upper structure
- Sliding plexiglass doors
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- All tempered glass
- Humidity control
- Cases ship standard unfinished


## OPTIONS

- Remote condensing unit
- Casters
- RAL color/laminate front and side panels
- Available in matching Gelato case



PHOTO SHOWN MATCHING GELATO

## A90



| GEM S3 CHOCOLATE               |           |                         |                         |                     |                     |                         |                          |
|--------------------------------|-----------|-------------------------|-------------------------|---------------------|---------------------|-------------------------|--------------------------|
| TECHNICAL FEATURES             |           | MODELS                  |                         |                     |                     |                         |                          |
|                                |           | GEM S3 C1000            | GEM S3 C1300            | GEM S3 C1500        | GEM S3 C1700        | GEM S3 C2000            | GEM S3 CA90              |
| External Dimensions (L-D-H)    | Inches    | 39 1/4" - 34 1/4" - 55" | 51 1/4" - 34 1/4" - 55" | 59" - 34 1/4" - 55" | 67" - 34 1/4" - 55" | 78 3/4" - 34 1/4" - 55" | 78 3/16" - 34 1/4" - 55" |
| Inches-MM                      | MM        | 1000 - 869 - 1400       | 1300 - 869 - 1400       | 1500 - 869 - 1400   | 1700 - 869 - 1400   | 2000 - 869 - 1400       | 1986 - 869 - 1400        |
| Crated Dimensions (L-D-H)      | Inches    | 45" - 40" - 61"         | 59" - 40" - 61"         | 67" - 40" - 61"     | 74 3/4" - 40" - 61" | 84" - 40" - 61"         | 84" - 40" - 61"          |
| Inches-MM                      | MM        | 1150 - 1016 - 1549      | 1500 - 1016 - 1549      | 1700 - 1016 - 1549  | 1900 - 1016 - 1549  | 2150 - 1016 - 1549      | 2150 - 1016 - 1549       |
| Humidity Control               | Type      | 35-70%                  | 35-70%                  | 35-70%              | 35-70%              | 35-70%                  | 35-70%                   |
| Refrigeration                  | Type      | Ventilated              | Ventilated              | Ventilated          | Ventilated          | Ventilated              | Ventilated               |
| Refrigeration Display Area     | Type      | Deck                    | Deck                    | Deck                | Deck                | Deck                    | Deck                     |
| Operating Temperature          | °F        | 55°F                    | 55°F                    | 55°F                | 55°F                | 55°F                    | 55°F                     |
| Compressor                     | Nr./Type  | Hermetic                | Hermetic                | Hermetic            | Hermetic            | Hermetic                | Hermetic                 |
| BTU's @ +35°F Evap Temperature | BTU'S     | 1900 BTU'S              | 2200 BTU'S              | 2600 BTU'S          | 2800 BTU'S          | 2800 BTU'S              | 2800 BTU'S               |
| Electric Supply                | (V/Ph/Hz) | 220/1/60                | 220/1/60                | 220/1/60            | 220/1/60            | 220/1/60                | 220/1/60                 |
| Power Consumption              | (A)       | 10A                     | 12A                     | 13A                 | 14A                 | 16A                     | 16A                      |
| Defrost                        | Mode/Type | Air                     | Air                     | Air                 | Air                 | Air                     | Air                      |
| Humidity Control               | ---       | Yes                     | Yes                     | Yes                 | Yes                 | Yes                     | Yes                      |
| Refrigerant Gas                | Type      | R404A                   | R404A                   | R404A               | R404A               | R404A                   | R404A                    |
| Net Weights                    | Kg/Lb     | 122Kgs / 268Lbs         | 136Kgs / 200Lbs         | 160Kgs / 352Lbs     | 188Kgs / 414Lbs     | 203Kgs / 447Lbs         | 152Kgs / 334Lbs          |
| Crated Weights                 | Kg/Lb     | 152Kgs / 334Lbs         | 166Kgs / 366Lbs         | 182Kgs / 400Lbs     | 218Kgs / 480Lbs     | 236Kgs / 520Lbs         | 210Kgs / 430Lbs          |

\* Dimensions are without side panels