

# PASS-THRU FREEZER (0°F)

**Model: DL3F-PTHD**

*Designer-line*

## 3-Section Pass-Thru Freezer With Half Doors

**DL3F-PTHD** - Stainless steel front, aluminum end panels and interior  
**DL3F-SA-PTHD** - Stainless steel exterior, aluminum interior  
**DL3F-SS-PTHD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

|                                       |  |
|---------------------------------------|--|
| Additional epoxy coated steel shelves | Casters  |
| Chrome or stainless steel shelves     | Special electrical req. (consult factory)  |
| Pan slide assemblies                  | <b>Correctional Facility Options</b>   |
| Rehinging of doors (consult factory)  | <ul style="list-style-type: none"> <li>One way security screws</li> </ul>          |
| Expansion valve system                | <ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul> |
| Custom laminates                      | <ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>       |
| Full doors                            | <ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>                 |

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Self contained, performance rated  
 "plug" refrigeration system

Environmentally safe R-404A refrigerant

Refrigeration system is readily accessible on  
 top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self closing doors

Magnetic snap-in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

### MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Automatic electric defrost

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug"  
 system can be removed and reinstalled at job site

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

|  |                 |
|--|-----------------|
| Net Capacity (cubic feet)                          | 70 (1982 cu l)  |
| Width, Overall (inches)                            | 78 (1981 mm)    |
| Depth, Overall (inches)<br>(including handles)     | 38 ¾ (984 mm)   |
| Depth [less doors] (inches)                        | 32 (813 mm)     |
| Depth [doors open 90°] (inches)                    | 79 (12007 mm)   |
| Clear Door Width (inches)                          | 19 ⅜ (492 mm)   |
| Clear Door Height (inches)                         | 58 ⅝ (1489 mm)  |
| Height, Overall (inches)<br>(including 5" casters) | 85 ¾ (2178 mm)  |
| Number of Door(s)                                  | 6               |
| Number of Shelves                                  | 9               |
| Shelf Area (square feet)                           | 61.2 (5.7 sq m) |
| Tray Slide Capacity (per section)                  | 24              |

## REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1    |
| Capacity (BTU per hour)*    | 4010 |

## ELECTRICAL DATA



|                                  |                                |
|----------------------------------|--------------------------------|
| Voltage<br>(International)       | 115/208-230/60/1<br>(220/50/1) |
| Feed Wires (including ground)    | 4                              |
| Total Amps (International)       | 14.3 (11.8) / 9.6 (4.8)        |
| Defrost Amps (International)     | 9.6 (4.8)                      |
| 10 ft. Cord/Plug (International) | No (No)                        |

## SHIPPING DATA

|                                |                 |
|--------------------------------|-----------------|
| Height - Crated (inches)       | 85 ½ (2172 mm)  |
| Width - Crated (inches)        | 90 (2286 mm)    |
| Depth - Crated (inches)        | 42 (1067 mm)    |
| Volume - Crated (cubic feet)   | 187 (3766 cu l) |
| Weight Std - Crated (pounds)   | 885 (401 kg)    |
| Weight SS - Crated (pounds)    | 1000 (454 kg)   |
| Weight Std - Uncrated (pounds) | 675 (306 kg)    |
| Weight SS - Uncrated (pounds)  | 790 (358 kg)    |

\* Rating @ -15°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

# Model Plan Views

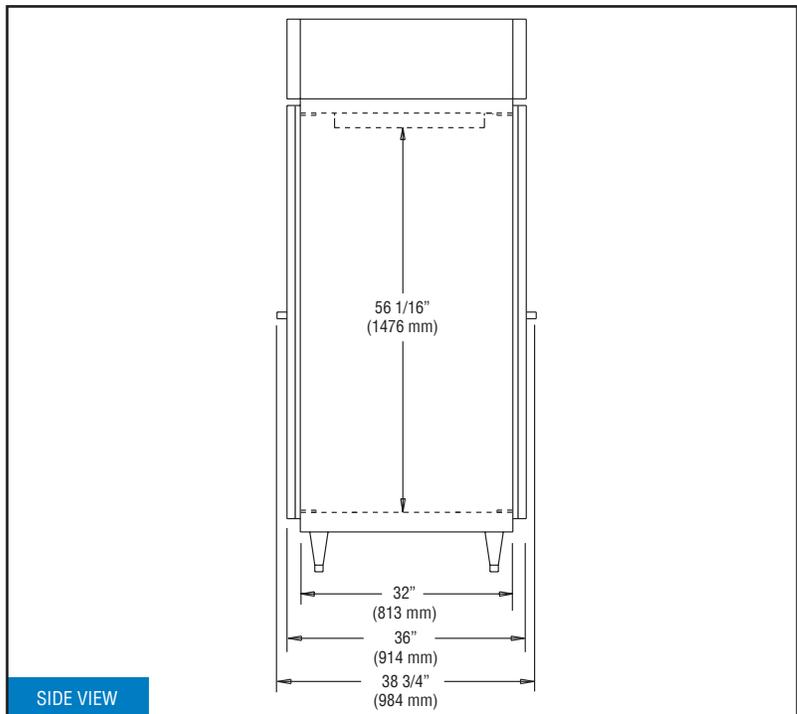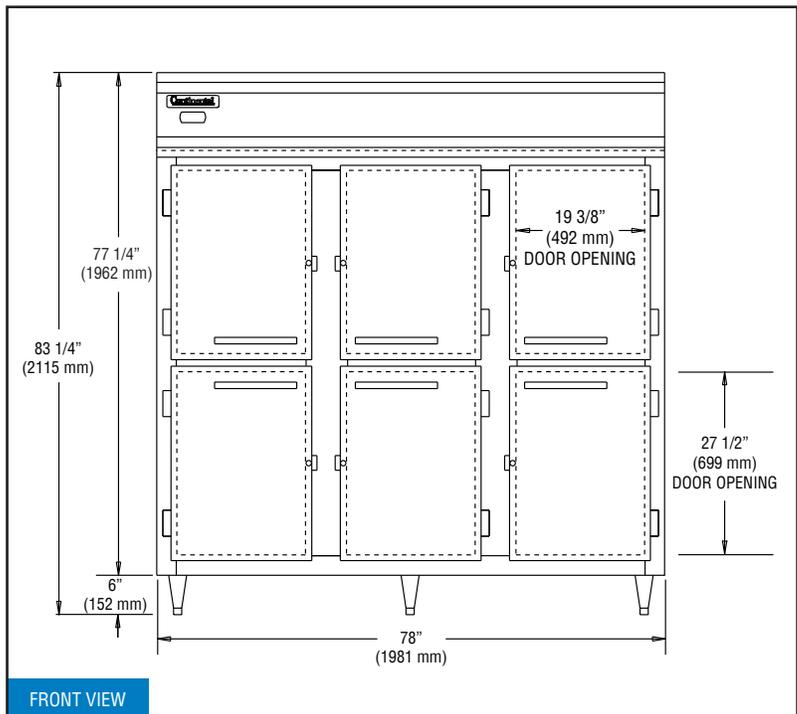

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.



Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

