

Kegeators

FDD / FBB 24 Series



Item # _____

FBB-24-HC FBB-24G-HC FBB-24S-HC FBB-24SG-HC
 FDD-24-HC FDD-24S-HC

Standard Features

- Our single door units are designed with durability and strength to handle the abuse of a portable unit.
- Refrigeration system is a **free flowing air system** throughout the box to ensure "ICE COLD" products at all times.
- With innovative and eco-friendly technology, Fagor utilizes R-290 Hydrocarbon designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Heavy duty 18 gauge stainless steel top, durable stainless steel coved corner floor, brushed aluminum glass rail and reinforced bottom door frame to protect your long term investment.
- **LED interior light** underneath the mullion to protect itself from normal operations (FBB models only).
- NSF approved for bottle and pre-packed goods.
- FDD - 24(S) single keg units are rear breathing with internal drain.
- FBB - 24(S)(G) single door units are rear breathing with epoxy coated shelves.



FBB-24G-HC



FDD-24S-HC



*Conforms to UL & NSF-7 standards

Options & Accessories

- Additional shelves
- 220 volts / 50 cycles / 1 phase

Kegeators	Model	Doors	Towers	Taps	Kegs	Capacity 12 oz. cans	Amp	HP	Volt	NEMA Plug	Cabinet Dimensions W / D / H			Shipping (Wt. Cubes)	
	FBB-24-HC	1	-	-	-	1	415	1.5	1/10	115	5-15P	24-7/8"	30"	39-3/8"	187
FBB-24G-HC	1	-	-	-	1	415	1.5	1/10	115	5-15P	24-7/8"	30"	39-3/8"	187	23
FBB-24S-HC	1	-	-	-	1	415	1.5	1/10	115	5-15P	24-7/8"	30"	39-3/8"	187	23
FBB-24SG-HC	1	-	-	-	1	415	1.5	1/10	115	5-15P	24-7/8"	30"	39-3/8"	187	23
FDD-24-HC	1	1	1	1	1	-	1.5	1/10	115	5-15P	24-7/8"	30"	39-3/8"	165	23
FDD-24S-HC	1	1	1	1	1	-	1.5	1/10	115	5-15P	24-7/8"	30"	39-3/8"	165	23

*Depth includes 2-3/8" bumper. (S) Stainless steel units / (G) Glass door units.

JULY 2021

13105 NW 47th Ave. Opa-Locka FL 33054
 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
 info@fagorcommercial.com
 www.fagorcommercial.com

TOGETHER WE EVOLVE

Kegeators

FDD / FBB 24 Series



Specifications

Construction

Heavy duty stainless steel top, 18 gauge. Black vinyl front, sides and back. (S) models have stainless steel front, sides and back. Interior constructed of heavy duty galvanized steel walls with coved corner NSF approved stainless steel floor. Door is comprised of heavy duty black vinyl steel. (S) Models are stainless steel. (G) Models are a dual pane glass with black frame, (SG) models are a dual pane glass with aluminum frame. Provided with door locks, magnetic door gaskets, removable without tools. Door openings have a plastic breaker strips to retard condensate formation. Units come complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration system

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Rear breathing compressor. Evaporator coil is mounted to interior top of the unit. Large fan motor and fan blades for greater air flow. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing. Access for the condensing unit behind the back grill, slides out for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 33 °F to 38 °F in the interior cabinet.

Lights

Interior LED light underneath the mullion (FBB models only).


Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p).


Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).


FBB-24(G)(S)-HC Top View

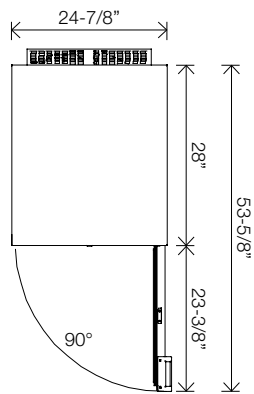


FBB-24(G)(S)-HC Front View




FBB-24(G)(S)-HC Side View

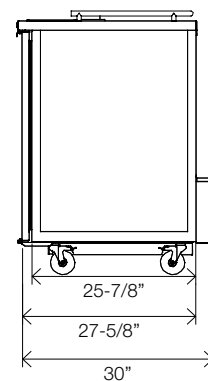


FDD-24(S)-HC Top View

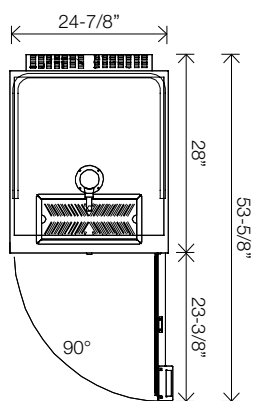

FDD-24(S)-HC Front View

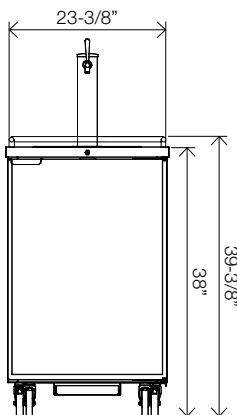

FDD-24(S)-HC Side View

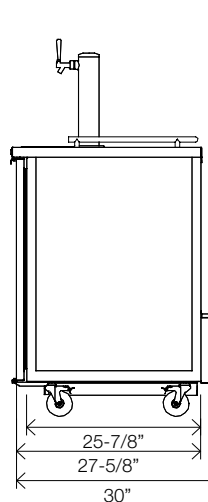

The manufacturer reserves the rights to modify materials and specifications without notice.