

Insulated Multi-Functional

Electric,
Insulated for Safety
10° Tilting, Leg Mounted
Made in USA

THERMA PRO
Multi-Functional
TT-TPSK-E

Standard Features



TT-TPSK-E40G
(with optional food pans)

- ◆ 304 stainless food contact zone with:
 - ◇ 304 stainless 1 ½" compression draw-off
- ◆ 304 stainless seam welded pan body with:
 - ◇ 10° tilting pan, 31" working height
 - ◇ Food pan holder under draw-off (except SK5)
 - ◇ Insulated sides and bottom
 - ◇ Tapered access rim
 - ◇ 240V, three phase (3Ø) standard
- ◆ Adjustable thermostat (175°F to 400°F)
- ◆ High limit safety thermostat
- ◆ Patented 304 stainless seam welded Capsule Lid with:
 - ◇ Variable position, actuator-assisted opening
 - ◇ Insulated sides & top
 - ◇ Adjustable steam vent
 - ◇ 304 stainless safety handle
 - ◇ "L" Lid condensate containment
- ◆ Cassette rack(s) for 12x20 food pans
- ◆ 304 stainless, seam welded component enclosure
- ◆ 304 stainless, seam welded tubular frame construction
- ◆ Single ball valve with 48" s/s flexible spray hose assembly
- ◆ Adjustable flanged feet

Models and Capacities

Model	2.5" Insert Pans	Cooking Baskets	Griddle Area (in. ²)	Kettle (Gals.)	Frying Oil (lbs.)	Oven Volume (ft. ³)
TT-TPSK-E40G	15	12	1029	40.1	105	13.7
TT-TPSK-G40G	15	12	1029	40.1	105	13.7

Select draw-off valve: ☐ 1.5" ☐ 2" ☐ 3"

With: ☐ compression ☐ ball type fitting

See price list for other draw-off options.

Select Voltage: ☐ 208V ☐ 240V ☐ 380V ☐ 415V ☐ 440V ☐ 480V

Select Phase: ☐ 1φ ☐ 3φ

Optional Features and Accessories

See price list for supplemental information regarding options

Faucet Options:

☐ Single ball valve mounted to frame with 48" vinyl flexible spray hose assembly

☐ 48" flexible spray hose assembly (vinyl or stainless) for use with dual or single fill faucet

☐ Automatic water filling meter

(Call for information regarding additional faucet options)

Prison/Security Options:

☐ Fasteners (screws & nuts)

☐ Nut driver tool

☐ Draw-off nut driver tool

☐ Screw driver tool

☐ Lockable control cover

☐ Draw-off protection

Other Options:

☐ Electric timer with buzzer

☐ Knockdown capability for 26" x 66" opening (shipped assembled)

Accessories:

☐ Perforated cooking/steaming basket (11" x 20½" x 5")

☐ Perforated or solid 12 x 20 food pans, 2½, 4 or 6 inch deep

☐ Draw-off drain spout

☐ Draw-off strainer

☐ Draw-off drain hose

☐ #10 Can holder for draw-off

☐ Flat bottom scoop

☐ Fry scoop


☐ Skittle care kit

THERMA PRO
Multi-Functional
TT-TPSK-E

Electric,
Insulated for Safety 10°
Tilting, Leg Mounted
Made in USA

**Insulated Multi-
Functional Cookers**

DRAWING REPRESENTS MODEL SK10-7 WITH 1 1/2" DRAW-OFF

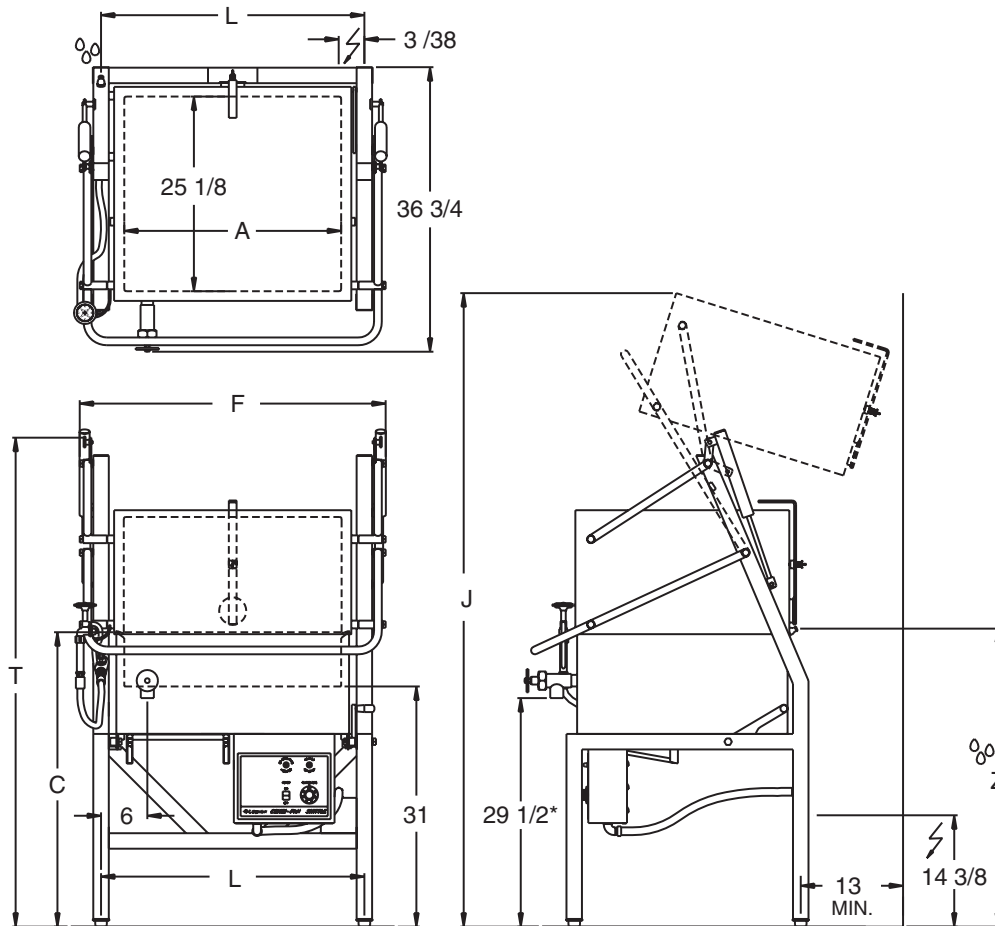

SKITTLE® DIMENSIONS

Model*	A	F	L	Model*	A	F	L	Model*	A	F	L	Depth	C	J	T	Z
TT-TPSK-E40G	14.0	25.5	20.0	SK10-5	28.0	39.5	34.0	SK15-5	41.0	52.5	47.0	5	36.0	79.8	61.1	36.3
TT-TPSK-G40G	14.0	25.5	20.0	SK10-5	28.0	39.5	34.0	SK15-5	41.0	52.5	47.0	5	36.0	79.8	61.1	36.3

*Dimensions on these drawings are applicable only when using a 1.5" diameter draw-off valve. If a 2" or 3" diameter draw-off valve is required, contact Legion for applicable dimensions.

**Vertical dimensions of 11" deep pan may be reduced by 2" to match 9" deep pan.

SKITTLE® ELECTRICAL SPECIFICATIONS (Amperes per Leg)

Model*	kW	208 Volt		240 Volt		380 Volt	415 Volt	440 Volt	480 Volt
		1 Phase	3 Phase-Δ	1 Phase	3 Phase-Δ	3 Phase-Y	3 Phase-Y	3 Phase-Y	3 Phase-Y
SK5-()	5.9	25.6	14.8	24.6	14.2	9.0	8.2	7.8	7.1