

**AERO 35**

**VACUUM PACKAGING MACHINE**



**STANDARD FEATURES**

- 1 seal bar (front): 13.5"
- Double seal (two wires).
- Removable seal bar for cleaning and maintenance purposes
- Pump capacity: 8 m<sup>3</sup>/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 25-60 sec
- Standard Sensor control with a 3-program memory
- Easy control interface
- Soft air Program
- Liquid control sensor, including inclined insert plate(s)
- External Vac
- Read Meat function
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Comes with insert plate for a faster cycle and product adjustment
- Service kit for standard maintenance

**DESCRIPTION**

State of the art, innovative, robust machine with a slick design. Easy control interface. 3 adjustable setting programs. Standard Soft-air. Precise vacuum settings with sensor pressure control. This table-top model complies with CE/UL/ETL standards.


**ACCESSORIES/OPTIONS**

- Optional without extra costs: Cut-off/Wide seal
- Trolley with shelves
- External hose adaptor for GreenVAC
- GreenVAC containers
- GreenVAC vacuum bags



Henkelman offers standard 3 year warranty


**SEAL BAR CONFIGURATION**

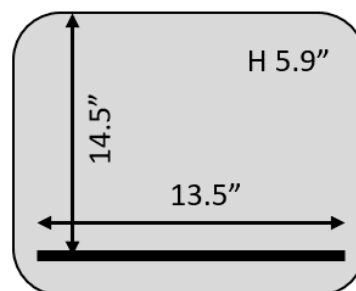

# VACUUM PACAGKING MACHINE AERO 35 – SPECS

VACUUM PACKAGING MACHINE AERO 35 – SPEC SHEET

## DIMENSIONS

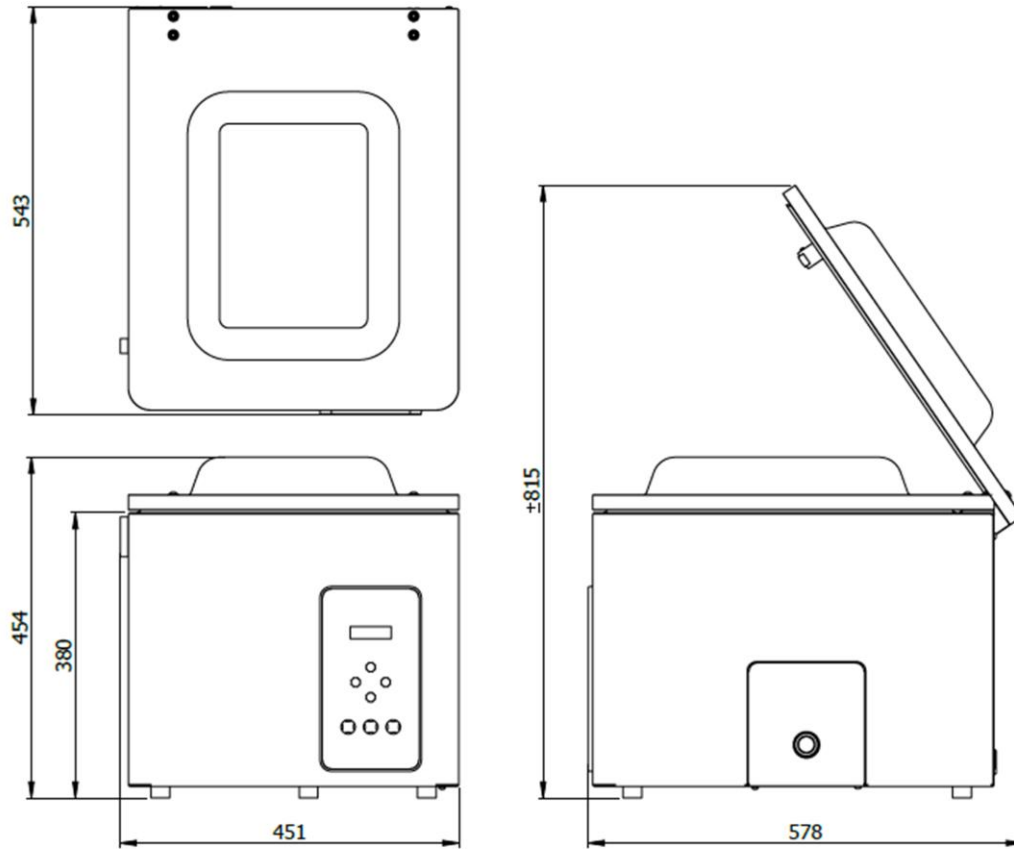

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m <sup>3</sup> /h)	Power (HP)	Weight (LB)
	Chamber (usable space) L x W x H	Machine L x W x H				
AERO 35	14.5" x 13.7" x 5.9"	21.4" x 17.7" x 17.9"	110V-1-60	8	0.70	79.3
6 Amp		Plug: NEMA 5-15				



**HENKELMAN USA**  
493 W. Fullerton Ave  
Elmhurst, IL 60126  
USA

**Sales support**  
P +1 331-979-2013  
E [info@invacus.com](mailto:info@invacus.com)  
**Service/technical support**  
P +1 331-979-2013  
E [info@invacus.com](mailto:info@invacus.com)