

# Cuisine Series Heavy Duty 18" Add-A-Unit

Project	
Item	_
Quantity	
CSI Section 11400	
Approved	
Date	

#### Models

- C18-1S
- C18-1-1S
- C18-1M
- C18-1-1M



Model C18-1S 18" Add-A-Units, Griddle

#### Standard Features

- Griddle top with 1" (25mm) thick steel plate
- Hi-lo valve control (-1)
- Griddle control, with embedded thermostat sensor bulb (-1-1)
- Low to 500°F (260°C) (-1-1)
- 30,000 BTU/h burner
- Stainless front and sides
- Stainless steel front railStainless steel burner box
- 1 1/4" NPT front gas manifold
- Can be connected individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

## Options & Accessories

- Grooved griddle (18" section)
- Single or double deck high shelf or back riser
- Full Height Stand for modular units with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door for cabinet base units
- · Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
  Gas flex hose w/ quick disconnect:
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" (Specify)
- Rear Gas Connection: 3/4" NPT
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane nonmarking swivel casters w/front brakes.
- Extension for 1/9 pans

### Specifications

Garland Cuisine Series Add-A-Unit, Model \_\_\_\_\_ with total BTU/h rating \_\_\_\_\_ when used with natural/propane gas. Stainless steel finish & 6" (152mm) legs w/adjustable feet.

**Griddles** - 1" (25mm) thick steel plate with 3" (76mm) wide grease trough. Burners rated 30,000 BTU/h each. One burner per 18" (457mm) section.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.












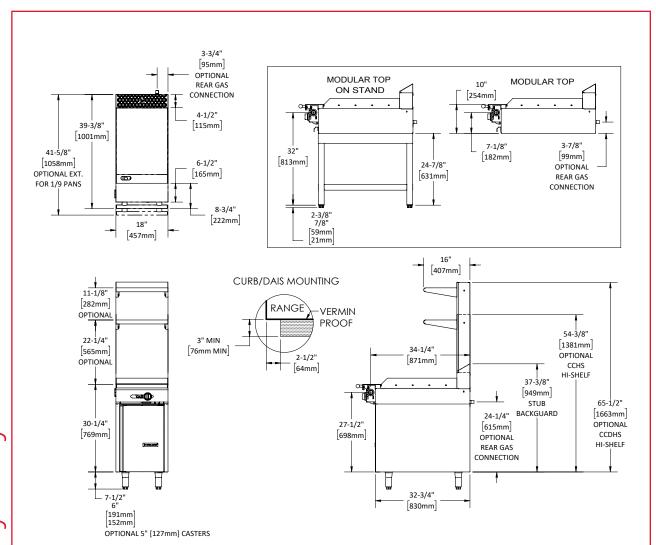

	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
Model #				Cu Ft	lbs/kg
C18-1S	18" (457mm) VG/Storage Base	30,000	30,000	28	315/145
C18-1M	18" (457mm) VG/Modular Top	30,000	30,000	26	315/145
C18-1-1S	18" (457mm) TG/Storage Base	30,000	30,000	28	315/145
C18-1-1M	18" (457mm) TG/Modular Top	30,000	30,000	26	315/145

OB = Open Burner, FFHT= Front fired Hot Top, HT = Hot Top

VG = Manual Valve Controlled Griddle,

TG= Thermostatic Controlled Griddle

Combustible Wall Clearance			
Sides	Back		
10" (254mm)	6" (152mm)		

Individual Burner Ratings (BTU/h)					
Burner		NAT.		PRO.	
Griddle		30,000		30,000	
Dimensions:	Ur	nit	Ca	binet Interior	

Dimensions: In (mm)	Unit	Cabinet Interior
Width	18" (457mm)	15-1/2"(394mm)
Depth	39 3/8" (1001mm)	28-1/2" (724mm)
Height	30 1/4" (769mm)	19-1/2" (495mm)
Height w/ 6" legs	36 1/4" (921mm)	N/A

Gas Pressure	NAT.	PRO.				
Minimum Supply	7" WC	11" WC				
Manifold Operating Pressure	6" WC	10" WC				
Gas Manifold 1-1/4" NPT						

Welbilt reserves the right to make changes to the design or specifications without prior notice.

