

Project:	AIA#
Item:	
Location:	SIS#
Approved:	


MODEL:

HR2HC-1G

HORIZON TOP MOUNT REACH-IN

HR2HC Glass Double Door Reach-In Refrigerator

Hydrocarbon Series





CABINET CONSTRUCTION

- Exterior is stainless steel front and continuous coil coated sides
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Snap-in magnetic gaskets for positive door seal
- Six (6) heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Tray slide kit #4 (19 sets per half section)
- Additional shelves
- Shelf clips
- Door locks
- · Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option* (see note on back page)

FINISH OPTIONS

HR Standard

(S/S front, continuous coil coated sides, aluminum interior)

HRP

(S/S front, S/S sides, aluminum interior)

(S/S front, continuous coil coated sides, S/S interior)

HRPS

(Complete S/S exterior & interior)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- · Hot gas condensate evaporator
- Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F









3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	HR2HC-1G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	52"	
Depth Overall with Handle	33 %"	
Height Overall	85"	
Number of Doors	2	
Depth with Door Open 90°	55 ½"	
Door Openings (in)	21 %" x 61 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	46.88	
Internal Width Overall (in)	48"	
Internal Depth Overall (in)	25 1/8"	
Internal Height Overall (in)	62"	
Number of Shelves	6	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	6.0	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2800	
Heat Rejection (BTU/Hr)	4200	
Charge (lbs/grams)	0.3307/150	
SHIPPING DATA		
Gross Weight (crated lbs)	570 lbs	
Height - Crated	88"	
Width - Crated	55"	
Depth - Crated	36"	


*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

ELECTRICAL CONNECTION



Unit pre-wired at factory and include NEMA 5-15P 8' long cord and plug set.

Top Mount Reach-In Refrigerator Model: HR2HC-1G

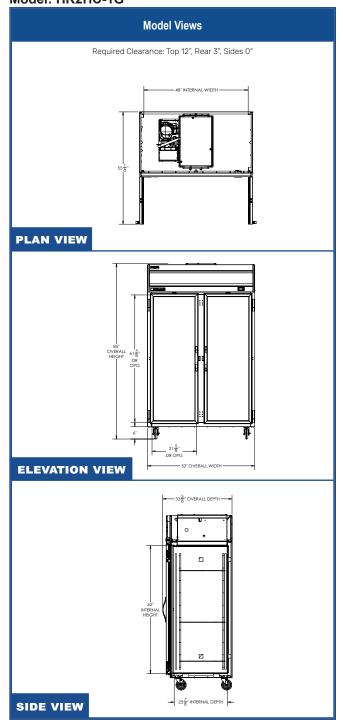













^{**} NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCl circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.