

## Classe 5 USB

### *Entry to Mid-range traditional espresso machine*

The Classe 5 exemplifies functional minimalism combined with contemporary aesthetics. The intuitive brew group control buttons are designed for instant interaction between the barista and the machine, with 4 programmable brewing settings per group. Body panels are crafted with brushed stainless steel, ABS, and nylon for an attractive design that is built to last.



### Standard Features

- 4 programmable volumetric controls per group for a simple and consistent workflow
- Highly-efficient heat exchange boiler with Steady Brew technology
- Electrical heating
- Durable and attractive stainless steel, nylon, and ABS body panels
- 2 manual steam wands with ergonomic C-Lever handle
- Powerful volumetric pump
- Boiler and pump pressure control gauges
- USB port makes it easy to save drink parameters and update software or programming
- Hot water outlet with manual valve knob control
- Durable polymer drip tray inserts are easily removable and dishwasher-safe
- Adjustable feet
- 1 year parts warranty

### Options

**iSteam:** Intelligent steam wand that automatically infuses air and turns off at the proper temperature to create the perfect milk for cappuccinos and lattes

**Electric Cup Warmer:** Specialized heating element enables 5 levels of controlled heat to keep ceramic cups warm

**Color:** Available in Anthracite Black or Ice White


**Groups:** 2 or 3 groups

### Accessories Included

- Double portafilters (1 per group)
- Rubber blind disks (for cleaning)
- User manual
- Foot extensions

### Space Requirements


- Allow at least 6" of clearance on all sides of the machine
- Allow 24" H x 5" W for in-line water filtration system. Filter system can be mounted behind the machine or under the counter
- Allow at least 3" of clearance under the filter cartridge to facilitate filter change

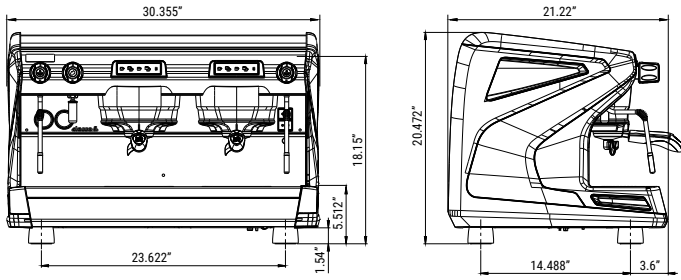

## Electrical Connections

### 2 Group

Voltage	208-240 VAC
Element	4300 W
Circuit Size	30 A
Receptacle	NEMA L6-30R



### 3 Group

Voltage	208-240 VAC
Element	5000 W
Circuit Size	30 A
Receptacle	NEMA L6-30R

Note: Power can be installed under or above counter. Please allow 3-4" of clearance for the plug, especially when installing power above the counter and behind the machine.

## Equipment Dimensions

### Machine Dimensions

#### 2 Group

Width	Depth	Height	Weight
30.36"	21.22"	20.472"	123.4 lbs

#### 3 Group

Width	Depth	Height	Weight
39.8"	21.22"	20.472"	149.9 lbs

### Shipping Dimensions

#### 2 Group

Length	Width	Height	Weight
35"	25"	30"	161 lbs

#### 3 Group

Width	Depth	Height	Weight
47"	33"	30"	215 lbs

## Water Connections

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine required.

### Drain Requirements

Open gravity drain with minimum 2" I.D. within 4' of the machine required.

### Water Quality Statement


The fact that water is potable is no guarantee that it is suitable for coffee equipment. Your water supply must be within these general guidelines:

**Supply Pressure:** 30-70 psi

**Hardness:** 2-3 GPG (1 grain of hardness = 17.1 ppm)

Water entering the machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 3 GPG) or mineral addition cartridge (if below 2 GPG) is required for the equipment to operate properly over time. See full Water Quality Statement for further details.

## Countertop Drilling Plan

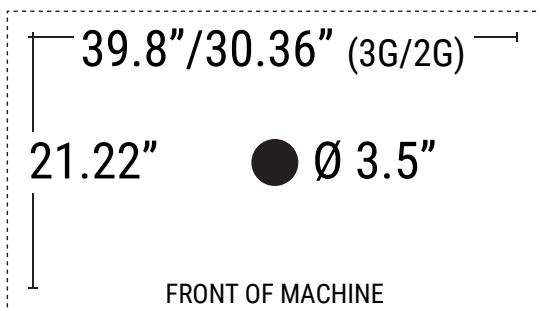

an Ali Group Company



The Spirit of Excellence