

Undercounter Refrigerators with Drawers FUR D Series



FUR-27-D2-N FUR-48-D2-N FUR-60-D2-N FUR-72-D2-N
 FUR-48-D4-N FUR-60-D4-N FUR-72-D4-N
 FUR-72-D6-N

Item # _____

Standard Features

- Our “Next Generation” undercounters have been completely re-designed to ensure proper temperature even in **100 °F environments**.
- Exclusive base design for over **30% greater interior** capacity than most in it’s class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Drawers: Heavy duty drawer slides, full length recessed drawer handles; accomodates: 27” & 60” models (1) 12” x 20” x 4” deep pan per drawer / 48” x 72” models (1) 12” x 18” x 4” deep box or (1)-1/2 & (1)-1/3 pan (pans and box sold separately).
- Doors: Heavy duty stainless steel door with self closing mechanism and full length recessed door handles; interior step design for added insulation and protection of door gasket.
- With innovative and eco-friendly technology, Fagor utilizes R-290 Hydrocarbon designed to meet DOE’s Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Front breathing refrigeration system for built-in applications.
- 36” high working height / 3” casters (opt.) for 34” high applications.



FUR-27-D2-N



FUR-60-D4-N



FUR-72-D2-N

Options & Accessories

- Epoxy coated shelves with clips
- 3” casters (set of 4, front 2 w/ brakes)
- Single & Double tier overshef
- 220 Voltss / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Undercounters - Drawers	Model	Doors	Drawers	Shelves	Capacity Cu. Ft.	Amps	HP	Volts	Cabinet Dimensions W / D / H			Shipping (Wt. Cubes)	
	FUR-27-D2-N	0	2	0	9.5	1.5	1/10	115	27-3/4"	30-1/8"	35-3/4"	220	21
FUR-48-D2-N	1	2	2	16.7	2.5	1/3	115	48-3/8"	30-1/8"	35-3/4"	309	35	
FUR-48-D4-N	0	4	0	16.7	2.5	1/3	115	48-3/8"	30-1/8"	35-3/4"	329	35	
FUR-60-D2-N	1	2	2	20.6	2.5	1/3	115	60-3/8"	30-1/8"	35-3/4"	363	47	
FUR-60-D4-N	0	4	0	20.6	2.5	1/3	115	60-3/8"	30-1/8"	35-3/4"	383	47	
FUR-72-D2-N	2	2	4	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"	433	56	
FUR-72-D4-N	1	4	2	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"	453	56	
FUR-72-D6-N	0	6	0	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"	473	56	

* Depth does not include 1" bumper. // All specifications are subject to change without notice.

Undercounters Refrigerators with Drawers

FUR D Series



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor.

Doors: heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Self closing mechanism and 120° stay open feature.

Drawers: heavy duty stainless steel with heavy duty drawer slides. Full extension drawers accommodate: 27" & 60" models (1) 12" x 20" x 4" deep pan per drawer / 48" x 72" models (1) 12" x 18" x 4" deep box or (1)-1/2 & (1)-1/3rd pan (pans and box sold separately).

Doors and Drawers: openings have a plastic breaker strips to retard condensate formation. Provided with magnetic door/drawer gaskets, removable without tools. Recessed full length handles.

Units come complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33 °F to 38 °F during normal operations.

Analog thermostate.

Drawers come standard with (2) pan dividers.

Shelving


(2) Epoxy coated shelving per door with channel slides for supports. Adjustable in-1/2" increments per shelf.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with 5" diameter casters, front two with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

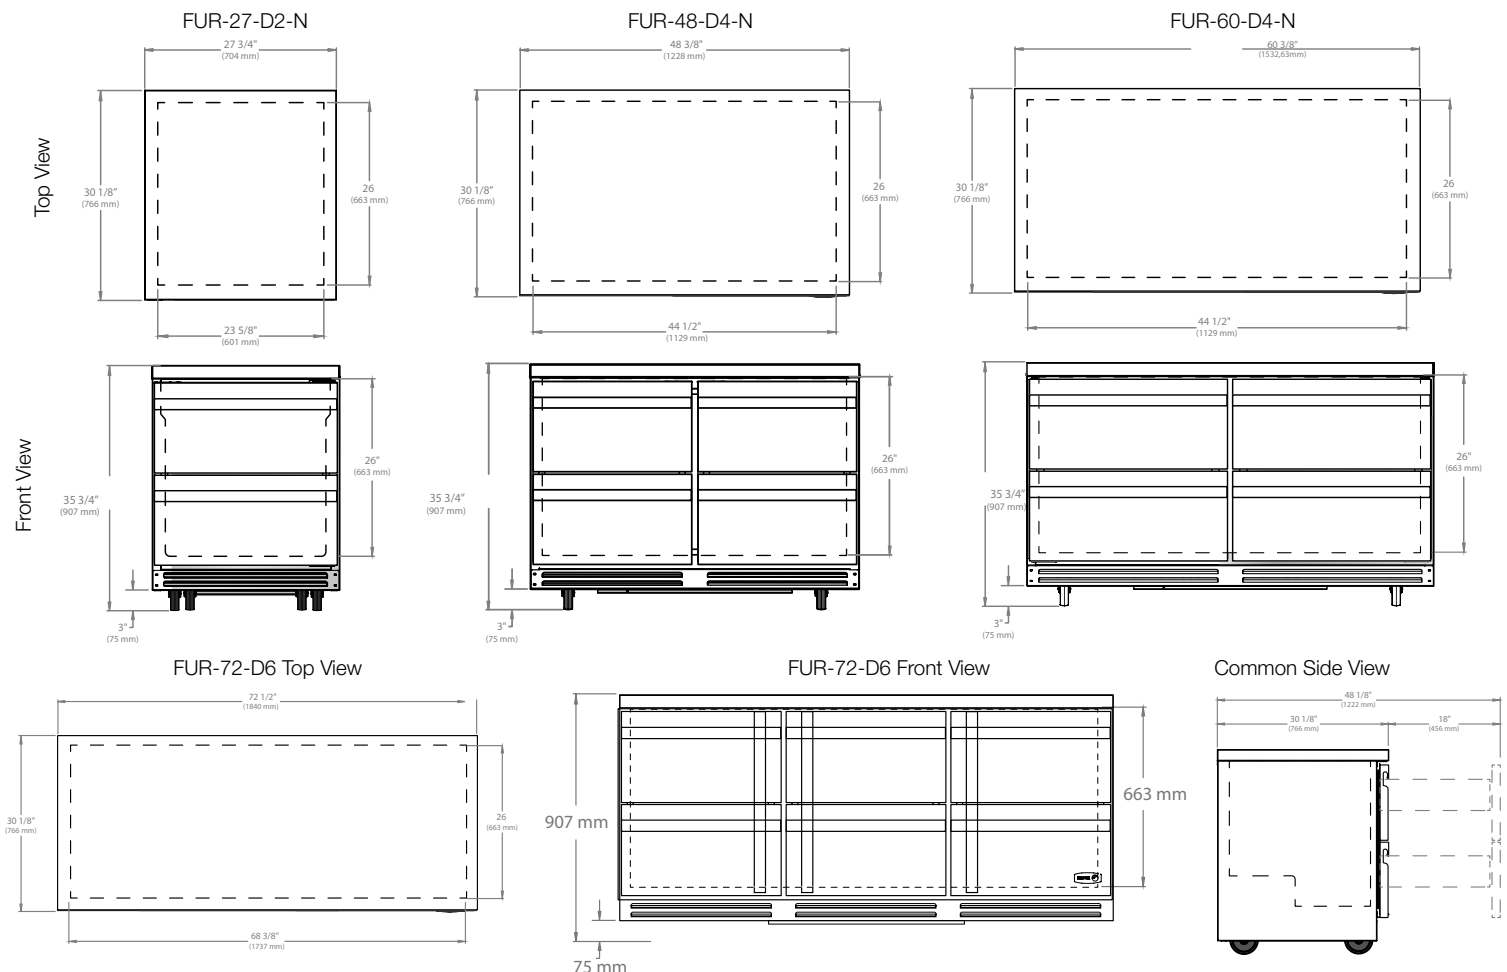

The manufacturer reserves the rights to modify materials and specifications without notice.

JULY 2021

13105 NW 47th Ave. Opa-Locka FL 33054
 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
 info@fagorcommercial.com
 www.fagorcommercial.com

TOGETHER WE EVOLVE