



A family company manufacturing in the USA

www.glastender.com



KC72 with stainless doors, stainless top, and 3 faucet column tower.



Intertek

4004503

Conforms to NSF/ANSI STD 7
and UL STD 471

Certified to CSA STD C22.2 No. 120

Meets NSF 7 requirements for closed container products



Intertek



Intertek

EP 5016978

Energy Performance Verified /
Rendement Énergétique Vérifié

Standard Features

- Self-contained
- Galvanized steel interior with stainless steel floor
- Locking doors
- Stainless steel keg racks and 1/2" thick high impact polypropylene threshold scuff plate
- Heated mullion to minimize condensation
- Stainless steel evaporator housing with separate removable evaporator drain pan

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Keg Cooler 72" Self-Contained

KC

KC72

CONFIGURATION HIGHLIGHT



Configurable Options

Temperature:

- Beer - 34°F to 40°F
- White wine - 50°F to 55°F
- Red wine - 60°F to 65°F

Refrigeration Compartment

Location:

- Left or Right

Front Finish:

- Black vinyl-clad
- Stainless steel

Door Hinge Location (specify for each door):

- Left or Right

Door Handle:

- Signature
- Pull-tab
- Tube

Top Style:

- No finished top
- Stainless top
- Laminated top

Left and Right Side Finish:

- Black vinyl-clad
- Stainless steel
- Laminated

Back Finish:

- Galvanized steel
- Stainless steel

Tower Style:

- Column (CT)
- Beverage (BT)

Tower Finish

- Stainless
- Mirror
- Brass

Faucet(s)

- 1, 2, or 3 for CT
- 4, 5, 6, 8, or 10 for BT

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Keg Cooler 72" Self-Contained

Specifications

		KC72
Dimensions	Length	72"
	Number of Sections	2
	Door Opening	20"
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required
	Full Load Amps	3.5
	Plug Type	8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment
Refrigeration	Refrigerant	R290 refrigerant - 125 grams, 4.41 oz., 0.28 pounds
	Compressor	Reciprocating, 1/6 HP, 1300 BTUH, 0.11 Tons
	Heat Rejection	1430 BTUH
Operating Range		34°F (1°C) to 65°F (18°C)
Plumbing		Automatic condensate evaporator. No drain connection required †
Weight Bearing Capacity		Countertops and other accessories should not exceed 500 pounds per door

Materials

- Stainless steel parts include: exterior sub-top, interior floor, evaporator cover, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors, and compressor cover
- Galvanized steel parts include: interior walls and ceiling, back and bottom
- Zinc plated CR steel parts include: leg sockets

Plumbing

- 1/2" tailpiece provided on drain pan and pre-plumbed drain line which exists out the bottom of the refrigeration compartment



5-15P

† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

Capacities


	KC72
1/2 Barrels	3
1/4 Barrels	3
1/6 Barrels*	11

*Consult factory for different tower options


Keg Cooler 72" Self-Contained

Drawings

PLAN VIEW

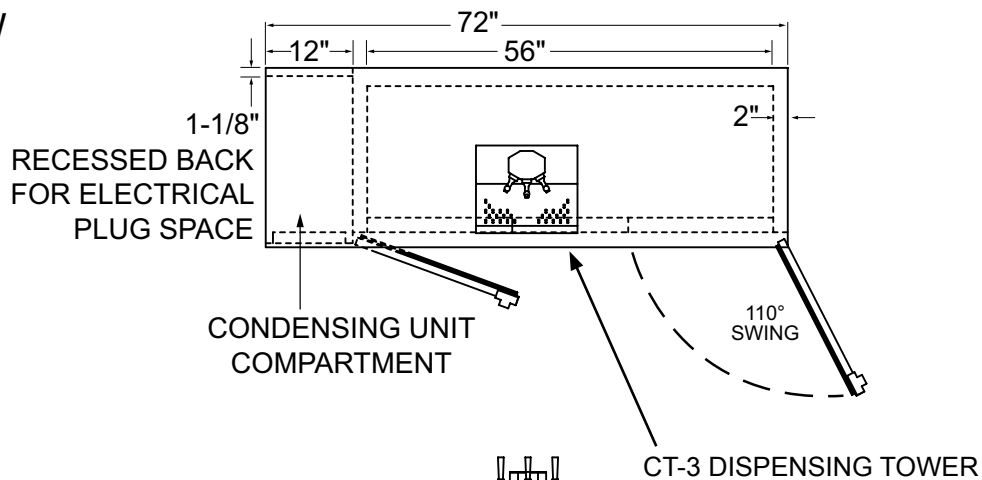

FRONT ELEVATION

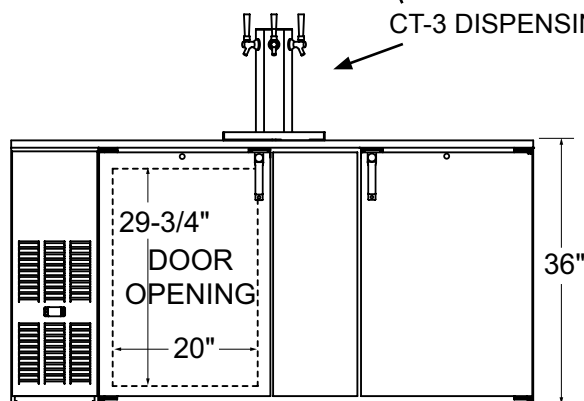

SIDE ELEVATION

