



CLASSIC II

Hot Showcase

CS (DRY)

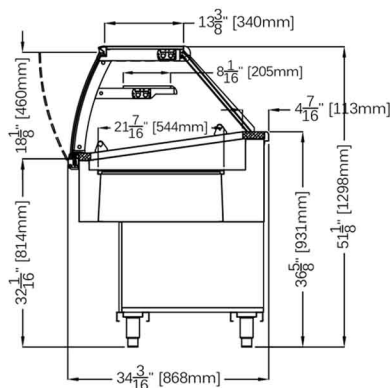

CBM (BAIN MARIE)

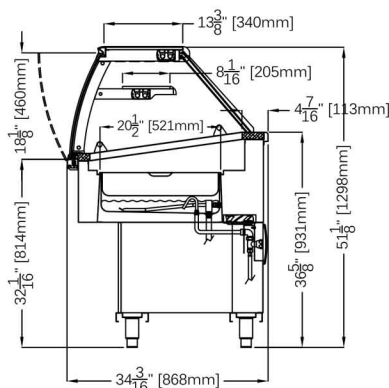

STANDARD FEATURES

Stainless steel insulated body with tubular painted galvanized chassis
Silver trim finish
Tilt back front glass
LED lighting
Plexiglass sliding doors
Stainless steel work bench
CS: dry warm top on stainless steel basin
CBM: hot well food warmer
Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

Stainless steel insert
Marble/Granite work counter
RAL color finish/wood laminate
Champagne trim finish
Matching front cabinetry counters with top glass
Canopy lighting
Heated glass shelf with electronic control
Casters

CLASSIC II HOT (CS - DRY)				
TECHNICAL FEATURES		MODELS		
		CLASSIC II CIICS1000	CLASSIC II CIICS1500	CLASSIC II CIICS2000
External Dimensions (L-D-H)	Inches	39 3/8" - 34 3/16" - 51 1/8"	59 1/16" - 34 3/16" - 51 1/8"	78 3/4" - 34 3/16" - 51 1/8"
Inches-MM	MM	1000 - 868 - 1298	1500 - 868 - 1298	2000 - 868 - 1298
Crated Dimensions (L-D-H)	Inches	53 1/8" - 39 3/8" - 55 1/8"	72 7/8" - 39 3/8" - 55 1/8"	92 1/2" - 39 3/8" - 55 1/8"
Inches-MM	MM	1350 - 1000 - 1400	1850 - 1000 - 1400	2350 - 1000 - 1400
Power Supply	(V)	208-220V	208-220V	208-220V
Power Consumption	(W)	500W	1000W	1210W
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	104Kgs / 239Lbs	144Kgs / 331Lbs	188Kgs / 432Lbs
Crated Weights	Kg/Lb	124Kgs / 285Lbs	170Kgs / 391Lbs	205Kgs / 470Lbs

* Dimensions are without side panels

CLASSIC II HOT (CBM - BAIN MARIE)				
TECHNICAL FEATURES		MODELS		
		CLASSIC II CIICBM1000	CLASSIC II CIICBM1500	CLASSIC II CIICBM2000
External Dimensions (L-D-H)	Inches	39 3/8" - 34 3/16" - 51 1/8"	59 1/16" - 34 3/16" - 51 1/8"	78 3/4" - 34 3/16" - 51 1/8"
Inches-MM	MM	1000 - 868 - 1298	1500 - 868 - 1298	2000 - 868 - 1298
Crated Dimensions (L-D-H)	Inches	53 1/8" - 39 3/8" - 55 1/8"	72 7/8" - 39 3/8" - 55 1/8"	92 1/2" - 39 3/8" - 55 1/8"
Inches-MM	MM	1350 - 1000 - 1400	1850 - 1000 - 1400	2350 - 1000 - 1400
Number of Wells (CBM)*	#	4	6	8
Power Supply**	(V)	208-220V	208-220V	208-220V
Power Consumption	(W)	1500W	2030W	3040W
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	104Kgs / 239Lbs	144Kgs / 331Lbs	188Kgs / 432Lbs
Crated Weights	Kg/Lb	124Kgs / 285Lbs	170Kgs / 391Lbs	205Kgs / 470Lbs

* Dimensions are without side panels

* Floor Sink is required for wet wells application - Not needed for Dry heat

** Available in 208V/220V/1ph or 3ph

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

