

Undercounter Refrigerators & Freezers

FUR/FUF Series



FUR-27-N FUR-36-N FUR-48-N FUR-60-N FUR-72-N
 FUF-27-N FUF-48-N FUF-60-N

Item # _____

Standard Features

- Our “Next Generation” undercounters have been completely re-designed to ensure proper temperature even in **100 °F environments**.
- Exclusive base design for over **30% greater interior** capacity than most in it’s class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with self closing mechanism and full length recessed door handles; **interior step design** for added insulation and protection of door gasket.
- With innovative and eco-friendly technology, Fagor utilizes R-290 Hydrocarbon designed to meet DOE’s Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Front breathing refrigeration system for built-in applications.
- 36” high working height / 3” casters (opt.) for 34” high applications.



FUR(F)-27-N



FUR(F)-48-N



FUR-72-N

Options & Accessories

- Epoxy coated shelves with clips
- 3” casters (set of 4, front 2 w/ brakes)
- Removable 4” back splash.
- Single & Double tier overshelf
- 220 Voltss / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

Doors	Model	Doors	Shelves	Capacity Cu. Ft.	Amps	HP	Volts	Cabinet Dimensions W / D / H			Shipping (Wt. Cubes)		
	Undercounter Refrigerators	FUR-27-N	1	2	9.5	1.5	1/10	115	27-3/4"	30-1/8"	35-3/4"	182	21
FUR-36-N		2	2	13.1	1.5	1/10	115	36-3/8"	30-1/8"	35-3/4"	258	33	
FUR-48-N		2	4	16.7	2.5	1/3	115	48-3/8"	30-1/8"	35-3/4"	260	35	
FUR-60-N		2	4	20.6	2.5	1/3	115	60-3/8"	30-1/8"	35-3/4"	305	47	
FUR-72-N		3	6	25.4	3.0	1/3	115	72-1/2"	30-1/8"	35-3/4"	365	56	
Undercounter Freezers		FUF-27-N	1	2	9.5	2.7	1/3	115	27-3/4"	30-1/8"	35-3/4"	183	21
		FUF-48-N	2	4	16.7	6.5	1/2	115	48-3/8"	30-1/8"	35-3/4"	265	35
		FUF-60-N	2	4	20.6	6.5	1/2	115	60-3/8"	30-1/8"	35-3/4"	310	47

*Depth does not include 1" bumper.

JULY 2021

13105 NW 47th Ave. Opa-Locka FL 33054
 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
 info@fagorcommercial.com
 www.fagorcommercial.com

TOGETHER WE EVOLVE

Undercounter Refrigerators & Freezers

FUR/FUF Series



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Doors: heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Self closing mechanism and 120° stay open feature. Door openings have a plastic breaker strips to retard condensate formation. Provided with magnetic door gaskets, removable without tools. Recessed full length handles. Units come complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow. Refrigerators are designed to maintain temperatures between 33° to 38 °F and freezers 0° to -5 °F during normal operations. Digital controllers and thermostats on freezers, analog thermostats on refrigerators.

Shelving


(2) Epoxy coated shelving per door with clips. Adjustable in-1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

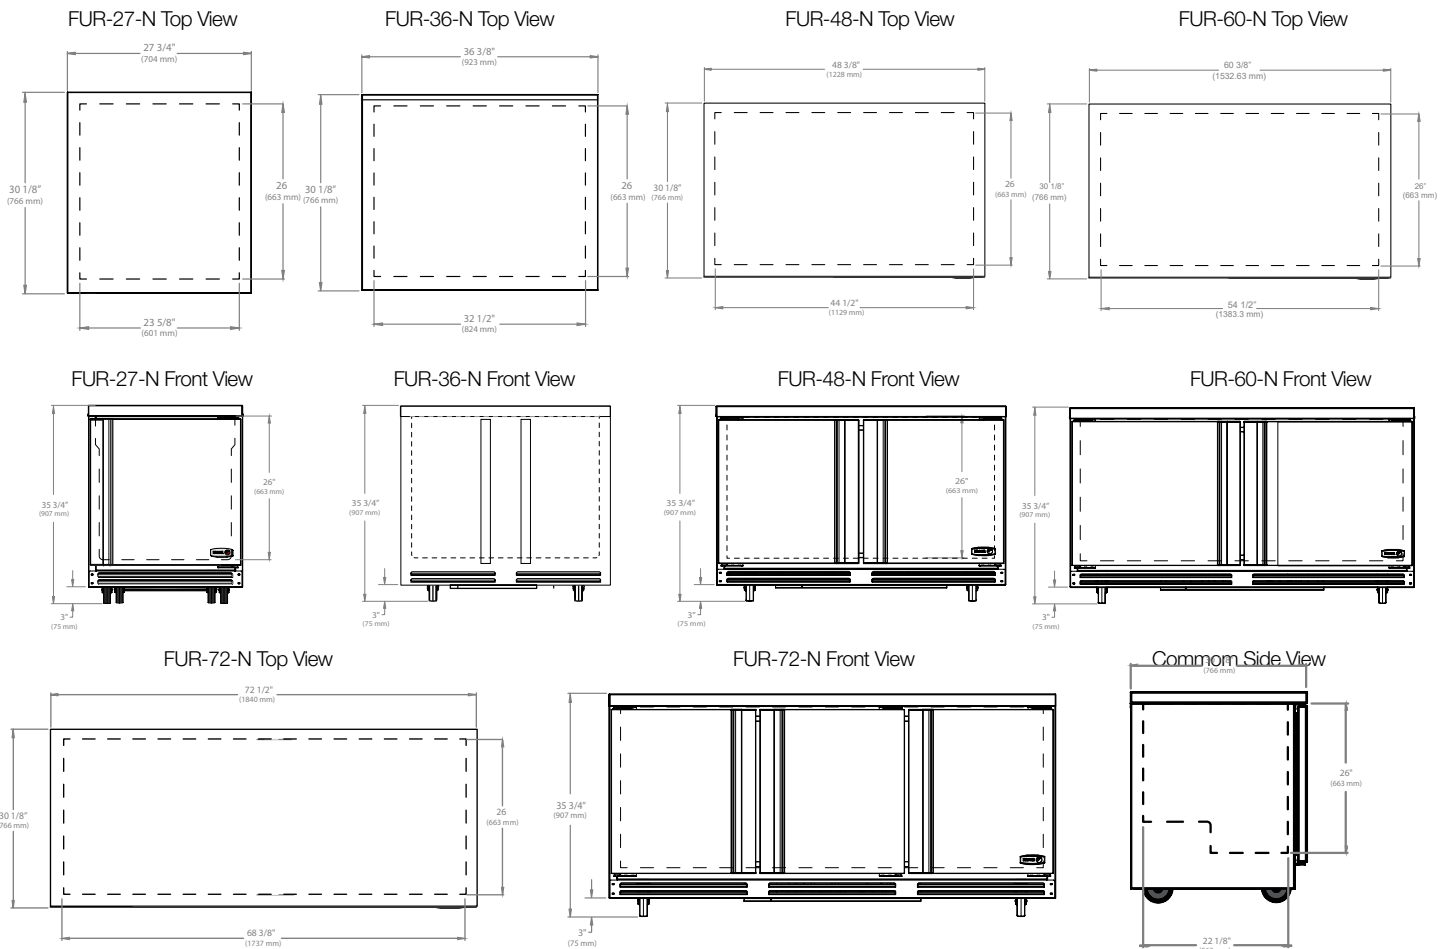

The manufacturer reserves the rights to modify materials and specifications without notice.