

KNOCKDOWN PROOFER RETARDER

MODEL: KDPR Series

FEATURES & BENEFITS

- Stainless Steel Construction
- Ships Knockdown
- Digital Touchscreen Control with Programmable Recipes
- Single Water Line Connection
- Designed in either 1, 2, 3 Rack Width
- Expandable to 1, 2, 3 or more Rack Deep
- Available in Left or Right Hinge Door (Only available on KPRD11, KDPR12, KDPR13)
- Stainless Steel Floor with Drain Standard*
- R134A Refrigerant

OPTIONS & ACCESSORIES

- ☐ Water Filter
- ☐ Pass Through Configuration (Please note Single Control Panel Only on Front & Door Hinged Same on Single Unit Only) (*Suffix PT*)
- ☐ Door Bumpers
- ☐ Factory Installation & Startup
- ☐ Factory Startup (Installation not included)

FINISH

Stainless Steel

WATER CONNECTION

1/4" NPT Cold Water Only
30-100 PSI Required

STANDARD PRODUCT WARRANTY

One Year Labor & Two Year Parts Warranty

NUMBER OF HUMIDIFIERS

<u>Quantity 1</u>	On Models KPRD11, KDPR12, KDPR21
<u>Quantity 2</u>	On Models KDPR13, KDPR22, KDPR31
<u>Quantity 3</u>	On Models KDPR23, KDPR32, KDPR33

APPLICATIONS

- ☐ Supermarkets & Retail
- ☐ Schools & Universities
- ☐ Bakeries
- ☐ Commissary Kitchens
- ☐ Military & Government Installations
- ☐ Hotels
- ☐ Restaurants
- ☐ Banquet Halls
- ☐ Sporting Arenas
- ☐ And many more.....

SHORT SPECIFICATION

Doyon Knockdown Retarder Proofer, Stainless Steel Construction, Electric, Unit Ships Knockdown, Includes Humidifiers based on Unit Size, Digital Touchscreen Control at Eye Level, Stainless Steel Floor with Drain Standard* , R134A Refrigeration, Insulated, Available with Pass Through, Auto Fill Humidity, One Year Labor & Two Year Parts Warranty

ELECTRICAL

KDPR11

- 208 Volt - 60 Hertz - 1 Phase - 5 kW - 24 Amps
- 240 Volt - 60 Hertz - 1 Phase - 5 kW - 21 Amps

KDPR12

- 208 Volt - 60 Hertz - 1 Phase - 5 kW - 24 Amps
- 240 Volt - 60 Hertz - 1 Phase - 5 kW - 21 Amps

KDPR13

- 208 Volt - 60 Hertz - 1 Phase - 10 kW - 48 Amps
- 240 Volt - 60 Hertz - 1 Phase - 10 kW - 42 Amps

KDPR21

- 208 Volt - 60 Hertz - 1 Phase - 5 kW - 24 Amps
- 240 Volt - 60 Hertz - 1 Phase - 5 kW - 21 Amps

KDPR22

- 208 Volt - 60 Hertz - 1 Phase - 10 kW - 48 Amps
- 240 Volt - 60 Hertz - 1 Phase - 10 kW - 42 Amps

KDPR23

- 208 Volt - 60 Hertz - 1 Phase - 15 kW - 72 Amps
- 240 Volt - 60 Hertz - 1 Phase - 15 kW - 63 Amps
- 208 Volt - 60 Hertz - 3 Phase - 15 kW - 42 Amps
- 240 Volt - 60 Hertz - 3 Phase - 15 kW - 36 Amps

KDPR31

- 208 Volt - 60 Hertz - 1 Phase - 10 kW - 48 Amps
- 240 Volt - 60 Hertz - 1 Phase - 10 kW - 42 Amps

KDPR32

- 208 Volt - 60 Hertz - 1 Phase - 15 kW - 72 Amps
- 240 Volt - 60 Hertz - 1 Phase - 15 kW - 63 Amps
- 208 Volt - 60 Hertz - 3 Phase - 15 kW - 42 Amps
- 240 Volt - 60 Hertz - 3 Phase - 15 kW - 36 Amps

KDPR33

- 208 Volt - 60 Hertz - 1 Phase - 15 kW - 72 Amps
- 240 Volt - 60 Hertz - 1 Phase - 15 kW - 63 Amps
- 208 Volt - 60 Hertz - 3 Phase - 15 kW - 42 Amps
- 240 Volt - 60 Hertz - 3 Phase - 15 kW - 36 Amps

RACK CAPACITY

	KDPR11	KDPR12	KDPR13
Double Side Load Rack			
Single Side Load Rack			
Single End Load Rack			
	KDPR21	KDPR22	KDPR23
Double Side Load Rack			
Single Side Load Rack			
Single End Load Rack			
	KDPR31	KDPR32	KDPR33
Double Side Load Rack			
Single Side Load Rack			
Single End Load Rack			

INSTALLATION NOTES & REQUIREMENTS

Water Line:	1/4" NPT Cold Water Line Connection Required with 30-100 PSI
Utilities:	Do not route utilities (wiring, plumbing, etc.) in or under the non-combustible floor beneath the proofer
Floor:	Unit should be installed on level surface within 1/8" per foot for proper installation. Slope should not exceed 3/4" in all directions in all directions under the unit. Unit without a floor must be installed on a non-combustible material floor with a cleanable surface.
Drain:	Drain Required for both units with and without a floor
Clearances:	10' ceiling height required for proper airflow and service access. 1" clearance between proofer and oven recommended to ensure proper proofer operation.

* Unit standard with back unless ordered with pass through option

EXTERIOR DIMENSIONS & SHIPPING WEIGHT

KDPR11
42"W X 44 3/8"D X 94 3/16"H
(1066 mm X 1127 mm X 2392 mm)

KDPR12
42"W X 84 3/8"D X 94 3/16"H
(1066 mm X 2143 mm X 2392 mm)

KDPR13
42"W X 124 3/8"D X 94 3/16"H
(1066 mm X 3159 mm X 2392 mm)

KDPR21
74 1/2"W X 44 3/8"D X 94 3/16"H
(1892 mm X 1127 mm X 2392 mm)

KDPR22
74 1/2"W X 84 3/8"D X 94 3/16"H
(1892 mm X 2143 mm X 2392 mm)

KDPR23
74 1/2"W X 124 3/8"D X 94 3/16"H
(1892 mm X 3159 mm X 2392 mm)

KDPR31
107"W X 44 3/8"D X 94 3/16"H
(2718 mm X 1127 mm X 2392 mm)




KDPR32
107"W X 84 3/8"D X 94 3/16"H
(2718 mm X 2143 mm X 2392 mm)

KDPR33
107"W X 124 3/8"D X 94 3/16"H
(2718 mm X 3159 mm X 2392 mm)

DRAWINGS

KDPR1X Series
(Replace X with # of Rack Depth)

Model	Depth
KDPR11	44 3/8"
KDPR12	84 3/8"
KDPR13	124 3/8"

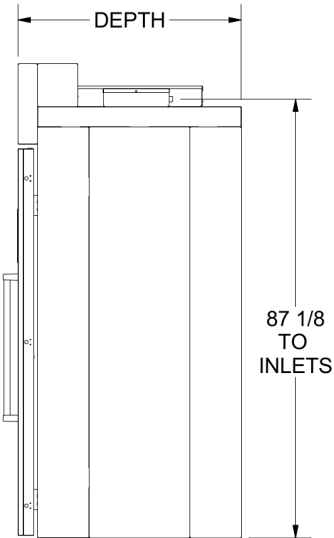
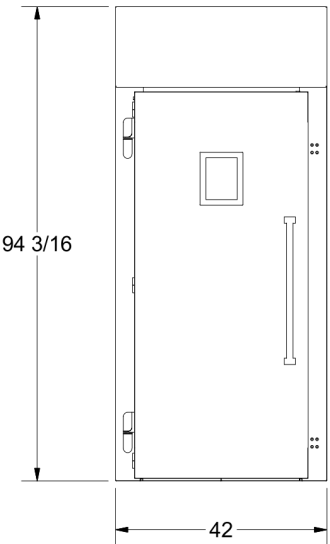
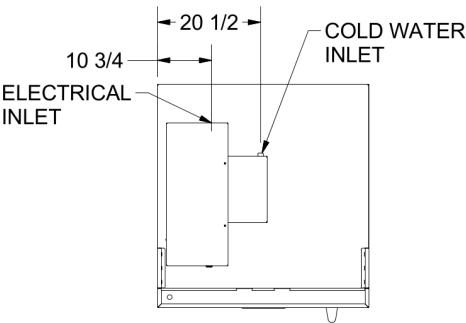


DRAWINGS

KDPR2X Series

(Replace X with # of Rack Depth)

Model	Depth
KDPR21	44 3/8"
KDPR22	84 3/8"
KDPR23	124 3/8"

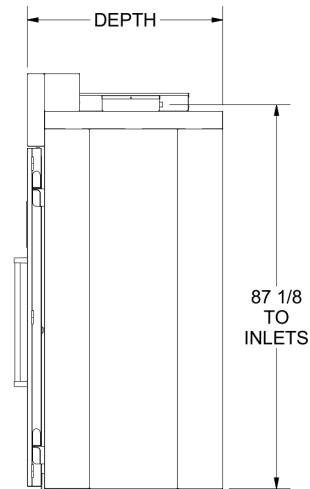
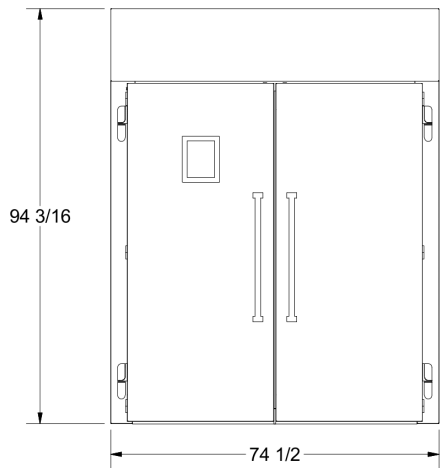
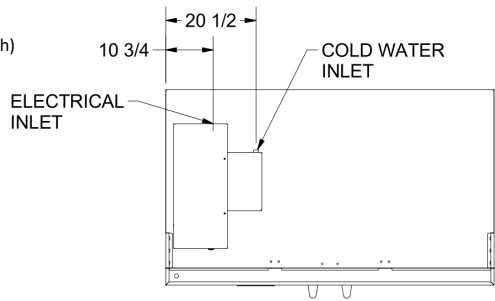


DRAWINGS

KDPR3X Series

(Replace X with # of Rack Depth)

Model	Depth
KDPR31	44 3/8"
KDPR32	84 3/8"
KDPR33	124 3/8"

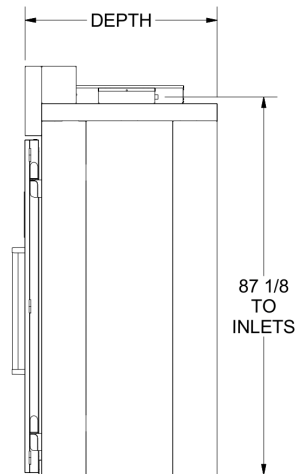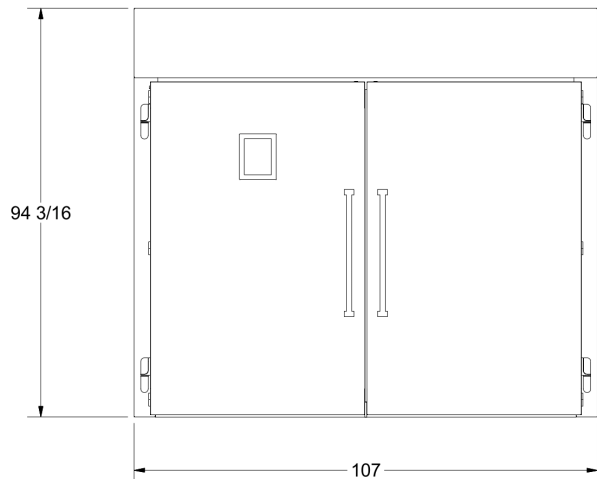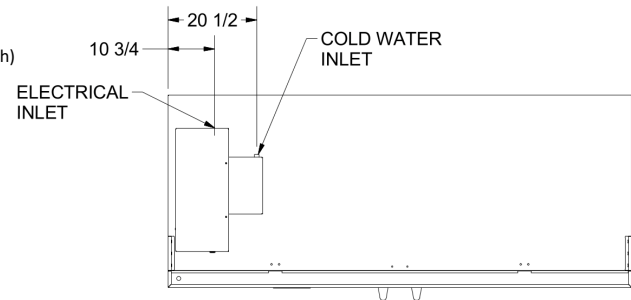

5600 13th Street
Menominee, MI 49858
sales@nu-vu.com
(800) 338-9886 Toll Free
(906) 843-4401 Phone
(906) 863-5889 Fax

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
KCL & REVIT DRAWINGS UPON REQUEST**