

DISPLAY REFRIGERATOR

Model: 1RSNGD

Natural Refrigerant R-290 Model

1-Section Display Reach-In Refrigerator with Hinged Glass Door Shallow Depth

1RSNGD - Stainless steel front, aluminum end panels and interior

1RSNSAGD - Stainless steel exterior, aluminum interior

1RSNSSGD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel case back | Pan slide assemblies |
| Additional epoxy coated steel shelves | Wine rack |
| Chrome or stainless steel shelves | Adjustable legs |
| Heavy duty pilaster strips | Solid door (consult factory) |
| Rehinging of door (consult factory) | Special electrical req. (consult factory) |
| Half doors | Standard depth (consult factory) |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass door

Chrome plated handle

Cam action, lift-off hinges

Self-closing door

Magnetic snap in door gasket

Cylinder lock in door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Off cycle defrost

Electronic controller with digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138

Phone: 215-244-1400

Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cubic feet) | 16 (453 cu l) |
| Width, Overall (inches) | 26 (660 mm) |
| Depth, Overall (inches) (including handle) | 29 1/4 (743 mm) |
| Depth (inches) (less door) | 25 7/8 (657 mm) |
| Depth (inches) (door open 90°) | 49 3/8 (1254 mm) |
| Clear Door Width (inches) | 19 3/8 (492 mm) |
| Clear Door Height (inches) | 58 5/8 (1489 mm) |
| Height, Overall (inches) (including 5" casters) | 82 1/4 (2089 mm) |
| Number of Doors | 1 |
| Number of Shelves | 4 |
| Shelf Area (square feet) | 20.4 (1.9 sq m) |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4+ |
| Capacity (BTU per hour)* | 1940 |

ELECTRICAL DATA

| | |
|--|---------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 6.5 (4.2) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA



| | |
|------------------------------|------------------|
| Height - Crated (inches) | 85 1/2 (2172 mm) |
| Width - Crated (inches) | 31 5/8 (803 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 65 (1841 cu l) |
| Weight Std - Crated (pounds) | 315 (143 kg) |
| Weight SS - Crated (pounds) | 330 (150 kg) |

* Rating @ +25°F evaporator, 90°F ambient
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
 (varies by country)

Model Plan Views

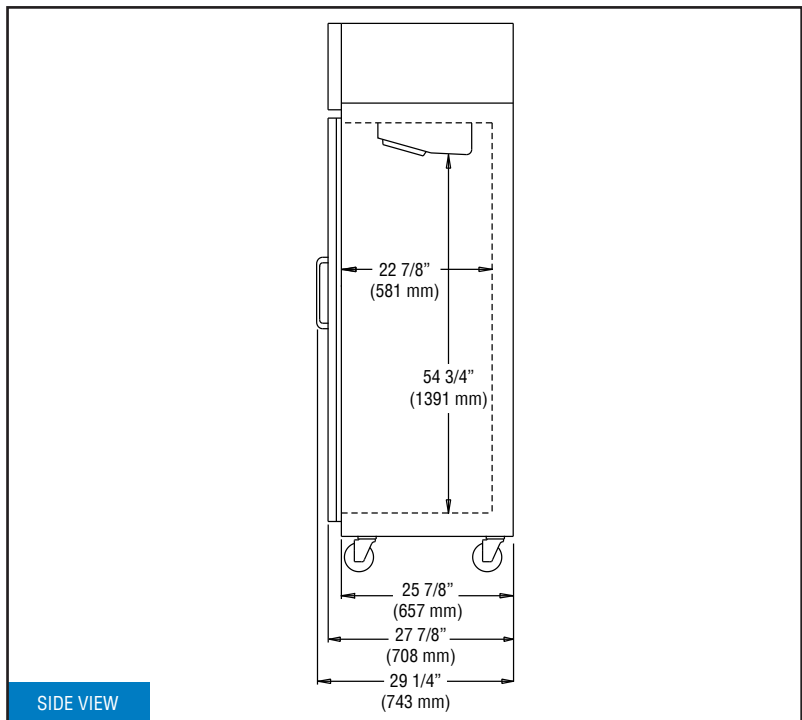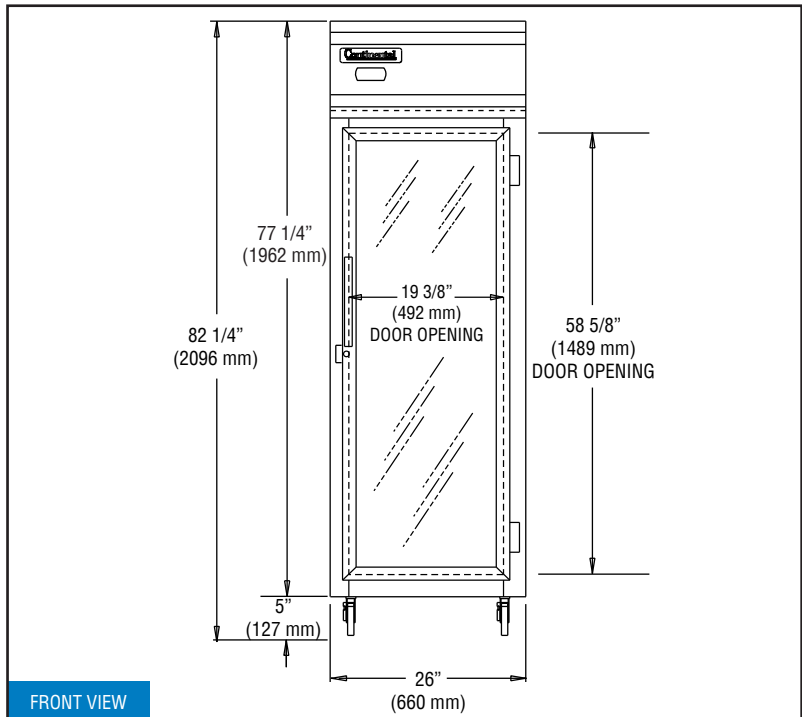

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

