DESIGNER LINE REFRIGERATOR/FREEZER

Model: D1RFXNHD

Natural Refrigerant R-290 Model



1-Section Dual Temp Extra-Wide Over/Under Reach-In Refrigerator/Freezer (0°F)

D1RFXNHD - Stainless steel front, aluminum end panels and interior

D1RFXNSAHD - Stainless steel exterior, aluminum interior

D1RFXNSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass doors (consult factory)	
	` ;,	
Additional epoxy coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Pan slide assemblies	Locking hasp (lock not included)	
Wine rack (refrigerator section)	Stainless steel mesh cover	
Casters	Coverless hinges	
Custom laminates		

Consult factory for other model configurations, options and accessories.

Project Name:		
Madal Ossairiad		
Model Specified:		
Location:		
Item No:	Quantity:	
ΛΙΛ #·	SIS #·	

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems (coil housing in cabinet zones)

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	16/16 (453/453 cu l)
Width, Overall (inches)	36 ½ (921 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	66 (1676 mm)
Clear Door Width (inches)	29 % (752 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 6" legs)	83 ½ (2115 mm)
Number of Doors	2
Number of Shelves	4
Shelf Area (square feet)	24.4 (2.3 sq m)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5, 1/3
Capacity (BTU per hour)*	1250 / 1725
ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	2.5 (2.7) / 5.7 (3.0)

(International) SHIPPING DATA

Defrost Amps (International)

(2) 10 ft. Cord/Plug [attach.]

SHIPPING DATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	42 (1067 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	87 (2464 cu I)
Weight Std - Crated (pounds)	555 (197 kg)
Weight SS - Crated (pounds)	615 (234 kg)

- * Rating @ +25°F evaporator, 90°F ambient (refrigerator)
- * Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with two NEMA-5-15P Plugs (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

3.9 (2.2)

Yes

(No)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

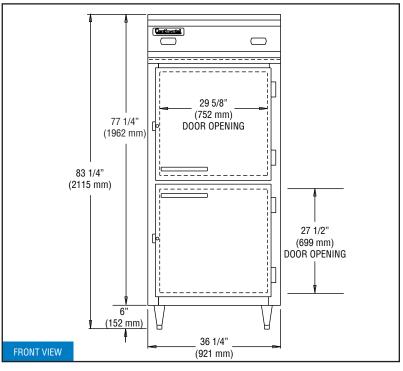

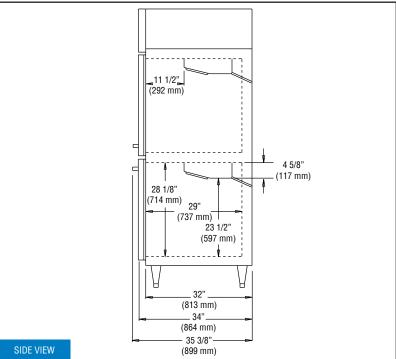

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.