
TAC	
TAG:	
••••	

Double Pantry Faucet

Architect/Engineering Specifications:

Single hole deck mount mixing faucet with polished chrome plated brass body, 14" swing nozzle with stream regulator outlet, ceramic cartridges with check valves, lever handles, 5 13/16" riser and 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

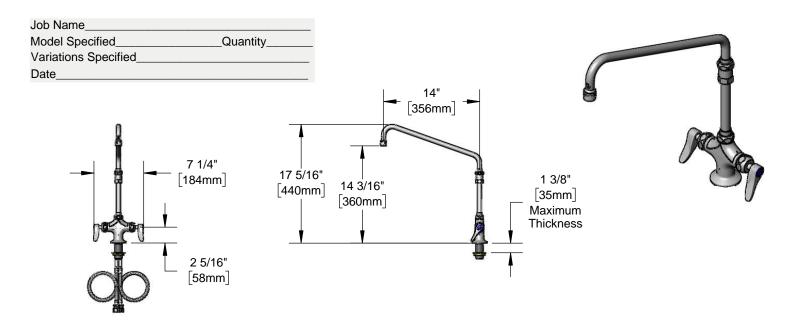

Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- 14" swing nozzle
- Stream regulator outlet, Series 1
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 5 13/16" riser
- 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections
- Material: Polished chrome plated brass body, riser & tubular spout, polished chrome metal handles

Non-Aerated

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

· Cerama Cartridges: Lifetime (Limited)

Performance Data:

VR Non-Aerated

Pressure: 20 - 125 psiTemperature: 40°F - 180°F

Flow Rate: 7.44 GPM @ 60 psi







Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	Optional Handles
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	☐ 4" Wrist Action
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05	□ Lever (Standard)
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	□ 4-Arm
1.2	□ B-0199-01-F12	□ B-0199-01-LF12	□ B-0199-06-F12	□ B-0199-06-LF12	
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR	Optional Cartridges
2.2	□ B-0199-01	□ B-0199-21	□ B-0199-06	□ B-0199-21-VRF	□ Quarter-Turn Cerama w/ Check Valves (Standard) □ Quarter-Turn Eterna w/ Spring Checks







T&S BRASS AND BRONZE WORKS, INC.

