



Project: _____ Item# _____

HMB AB SB 110

Mibrasa® charcoal oven with cupboard below and heating rack



FEATURES

OUR CHARCOAL OVENS

MIBRASA® is a closed barbecue grill invented and made in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

MIBRASA® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.

THE VERSATILITY OF MIBRASA® CHARCOAL OVENS

We have a wide range of high quality products and accessories allowing you to completely personalize your MIBRASA® charcoal oven, adapting it to your needs.

TECHNICAL INFORMATION

| | |
|-------------------------------------|----------------|
| Fire up time ¹ | 45 min-average |
| Cooking temperature | 482 - 662 °F |
| | 250 - 350 °C |
| Initial charcoal load ¹ | 33 lb |
| | 15 kg |
| Production* | 220.46 lb/h |
| | 100 kg/h |
| Charcoal load duration ² | 8 h |
| Gastronorm / grill | 2 x GN 1/1 |
| Equivalent power* | 6.71 hp |
| | 5 kW |
| Exhaust rate | 235 gal/s |
| | 3200 m³/h |
| Net weight ³ | 1182 lb |
| | 535.95 kg |

*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal


3. Weight with accessories included

DINERS PER SERVICE*



110-130

GRILL DIMENSIONS

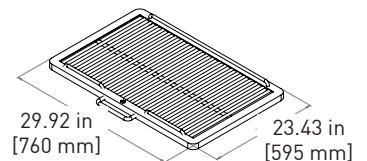

INCLUDED ACCESSORIES

- Grills (2)[G110]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Ember poker [PK110]
- Grill brush [CEP]
- Firebreak [FB]
- Dissipating filter [DF]
- Mibrasa Ecofire firelighters [FL]

OPTIONAL ACCESSORIES

- Locking casters [WINOX]
- Gastronorm rack [SGNAB]
- Kitchenware (consult online catalog)

Specifications and design are subject to change without notice.

QUALITY GUARANTEE







HMB AB SB 110

Mibrasa® charcoal oven with cupboard below and heating rack

SIDE VIEW

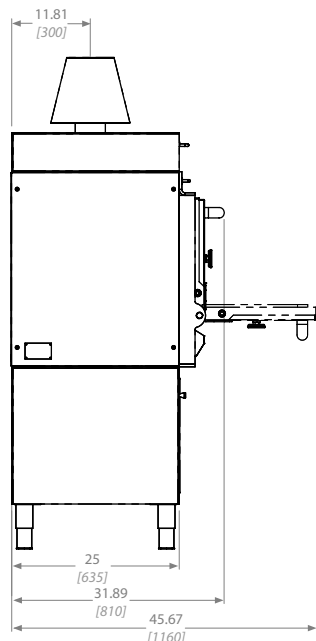

FRONT VIEW

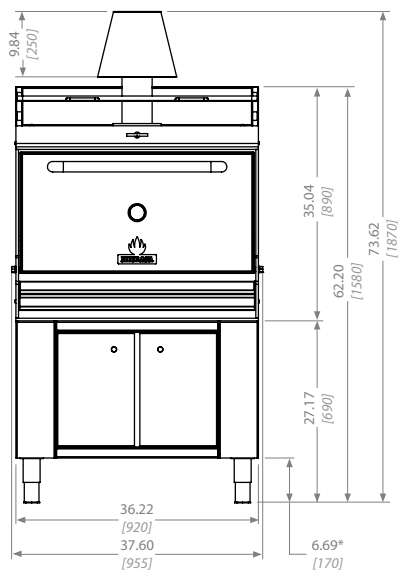

Dimensions in inches and [mm]

* Adjustable leg height: 5.31-7.68 in [135-195 mm]

DOOR COLOR



BLACK



RED



YELLOW



STAINLESS STEEL



BLUE


VENTILATION

- Firebreak diameter: Ø6.06 in [154 mm]
- Duct diameter: Ø4.50 in [114 mm]

SHIPMENT

- Crated weight: 1384 lb [627.95 kg]
- Crated size (WxDxH): 43.3 x 43.3 x 91.3 in [1100 x 1100 x 2320 mm]

Revit drawings available on request at usa@mibrasa.com

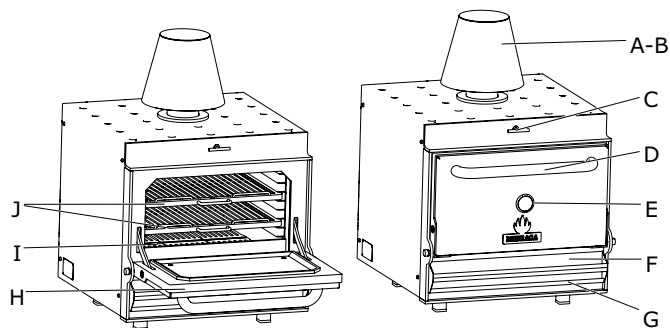

| | |
|---|------------------------------|
| A | Firebreak |
| B | Dissipating filter |
| C | Upper damper |
| D | Door handle |
| E | Thermometer |
| F | Lower damper / Ash collector |
| G | Grease collector |
| H | Door |
| I | Charcoal grids |
| J | Grills |

Installation guidelines and safety standards

- Combustible floor protection dimensions: a. 30 in [762 mm] to each side of the door opening
b. 36 in [914 mm] in front of the door opening
- Clearances to combustible constructions: a. Unit to backwall = 3 in [76 mm]
b. Unit to sidewalls = 3 in [76 mm]
- The workspace for the chef should be 43.3 in [1100 mm] from the front of the oven.
- A lifting device should be used whenever possible to lift the oven and place on the countertop/cupboard.

For further information, consult the instruction manual.

Specifications and design are subject to change without notice.