

## JOB\_\_\_\_\_Item #\_\_\_\_ RAISED GRIDDLE RANGES



(shown w/ optional casters)



model F330-24B (shown w/ optional casters)



model 2F330-1.5RB-30B (shown w/ optional casters)



## **Standard Features, Benefits & Options**

**CONSTRUCTION:** Easy cleaning, stainless steel finish, sturdily welded with angle iron and corrosion resistant aluminized steel framing. High back splash and shelf is standard. Sturdy 6" stainless steel pipe legs with adjustable feet. Double wall construction with heavy fiberglass insulation assures heat retention for daily money saving fuel efficiency and offers the best installation clearances in the industry. Non-combustible surfaces are 0" on the sides and 0" in the rear, combustible surfaces are 2" on the sides and 2" in the rear.

**OVENS:** 3 widths from which to choose;  $31\frac{1}{2}$ ",  $26\frac{1}{2}$ " &  $19\frac{1}{2}$ " All ovens measure  $20\frac{1}{2}$ " deep x 14" high. One heavy duty chrome plated wire rack is standard with 3 rack positions spaced approximately  $2\frac{3}{4}$ " apart with  $5\frac{3}{4}$ " between the top rack position and the ceiling. Easy cleaning porcelain coated and aluminized steel oven linings are standard. The ovens feature a durable cast iron "H" pattern burner;  $31\frac{1}{2}$ " &  $26\frac{1}{2}$ " ovens are rated at 30,000 BTUH, the  $19\frac{1}{2}$ " oven is rated at 25,000 BTUH. A special designed baffle directs heat for superior air circulation. Convection option is available, add prefix "C" or "CC" to the model number.

**GRIDDLE PLATES:** Available in 12", 18", 24", 30", 36", 42" and 48". Highly polished to minimize food sticking. 3/4" thick plate is standard, 1" thick is available. 4" high splash guard is standard. Higher sides are also available. 21¼" deep cooking surface. Grease drain slot is 3.5" x 1" and feeds into a seamless, deep, removable grease drawer at the back of the griddle to avoid cross contamination with the cheesemelter rack. **CHEESEMELTER-BROILER:** Adjustable heavy duty, nickel plated, cheesemelter racks measure 18'' deep by 6'' less than the width of the griddle.

**OTHER BURNERS:** 12" incremental char-broiler models feature cast iron "H" pattern burners, one for each 12" increment, rated at 25,000 BTU's ea. 18", 30" and 42" griddle & char-broiler sections feature 2, 4 and 6 straight burners respectively; char-broilers rated at 20,000 BTU's ea., griddles rated at 18,000 BTU's ea. Open burners are cast iron without gaskets, rated at 24,000 BTU's and feature a large 7" "star" flame pattern.

**RAISED GRIDDLE BURNERS:** Cast iron "H" pattern burners feature an attached stainless steel flame spreader to radiate heat downward combined with aluminized steel side panels for superior heat reflection. One burner BTU inputs are: 12"-20K, 18"-25K, 24"-30K. Two burner BTU inputs are: 30"-50K, 36"-60K. Three burner BTU inputs are: 42"-75K, 48"-90K.All raised griddle ranges have 2 gas hook-ups unless an entire griddle cooktop surface is raised across the entire frame.

**OPEN BURNER GRATES:** Open burner grates are 12" x 12" solid cast iron with spillover bowl that also reflects heat to the cooking surface for added efficiency and designed for easy movement of pots across top sections.


**OPTIONS & ACCESSORIES:** Convection fan, 1" thick & chrome griddle plates, safety pilot controls, gas hoses and knob protectors.



Comstock-Castle Stove Co. • 119 W. Washington St. • Quincy, IL. 62301 Tel.: 217-223-5070 • Fax: 217-223-0007 • www.castlestove.com



## RAISED GRIDDLE RANGES MEASUREMENTS

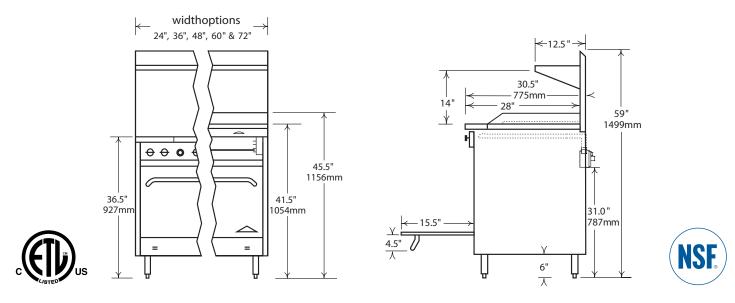

Raised Griddle Ranges (Popular models shown below. Call factory for other model details.) Raised griddle ranges have 2 gas hook-ups.

0	(Popular models shown below. Call	•	<u> </u>	A	
Cooktop		Description		Total	Approx. Wgt.
Configuration	Model #	Тор	Base	B.T.U.	Kg. / Lbs.
only 1 gas hook-up	F318-24B	(0) Open Burners & (1) 24" Raised Griddle	- w/ (1) 19.5" Oven	55,000	182 / 400
	F330-12B	(4) Open Burners & (1) 12" Raised Griddle	- w/ (1) 31.5" Oven	146,000	241 / 530
	F330-24B	<ul><li>(2) Open Burners</li><li>&amp; (1) 24" Raised Griddle</li></ul>	- w/ (1) 31.5" Oven	108,000	268 / 590
only 1 gas hook-u	F330-36B p	(0) Open Burners & (1) 36" Raised Griddle	- w/ (1) 31.5" Oven	90,000	277 / 610
	F3218-24B	<ul><li>(4) Open Burners</li><li>&amp; (1) 24" Raised Griddle</li></ul>	- w/ (2) 19.5" Ovens	176,000	327 / 720
	F3430-24B	<ul><li>(4) Open Burners</li><li>&amp; (1) 24" Raised Griddle</li></ul>	- w/ (1) 31.5" Oven - & 10" storage space	156,000	320 / 705
	F3226-24B	(6) Open Burners & (1) 24" Raised Griddle	- w/ (2) 26.5" Ovens	234,000	400 / 880
	F3226-36B	(4) Open Burners & (1) 36" Raised Griddle	- w/ (2) 26.5" Ovens	216,000	427 / 940
	2F330-1.5RB-30B	<ul> <li>(4) Open Burners</li> <li>&amp; (1) 18" Radiant Broiler</li> <li>&amp; (1) 30" Raised Griddle</li> </ul>	- w/ (2) 31.5" Ovens	246,000	536 / 1180

NOTICE: In an ongoing effort of product development & improvement, Comstock-Castle reserves the right to change specifications and product design without notice. Such modifications do not entitle the buyer to corresponding changes or replacements for previously purchased equipment.