

Cuisine Series Heavy Duty Griddle Top Range

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- C36-1R
- C36-1C
- C36-1S
- C36-1M
- C36-1-1R
- C36-1-1C
- C36-1-1S
- C36-1-1M



Model C36-1R
 Range with 36" Griddle
 Valve or Thermostat
 Controlled

Standard Features

- Griddle top with 1" (25mm) thick steel plate.
- Hi-lo valve control (-1)
- Griddle control, with embedded thermostat sensor bulb (-1-1)
- Low to 450°F (232°C) (-1-1)
- Stainless front and sides
- Stainless steel front rail
- Stainless steel burner box
- 1 1/4" NPT front gas manifold
- Can be connected individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Porcelain oven interior w/removable porcelain oven bottom
- R model - 4 rack positions
- C model - 3 rack positions
- R model - 1 chrome plated rack
- C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°-260°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Grooved griddle - (full or 1/2)
- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Single or double deck high shelf or back riser
- Full Height Stand for modular units with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" (Specify)
- Rear Gas Connection: 3/4" NPT
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non-marking swivel casters w/front brakes.
- Extra oven rack
- 1/9 Pan Rail Extension

Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model _____ with total BTU/h rating of _____ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).

Griddle Tops - 1" (25mm) thick steel plate griddle with 3" (76mm) wide grease trough. Burners rated 30,000 BTU/h each. One burner per 12" (305mm) griddle section.


Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Griddle Top Range

Cuisine Series Heavy Duty Griddle Top Range

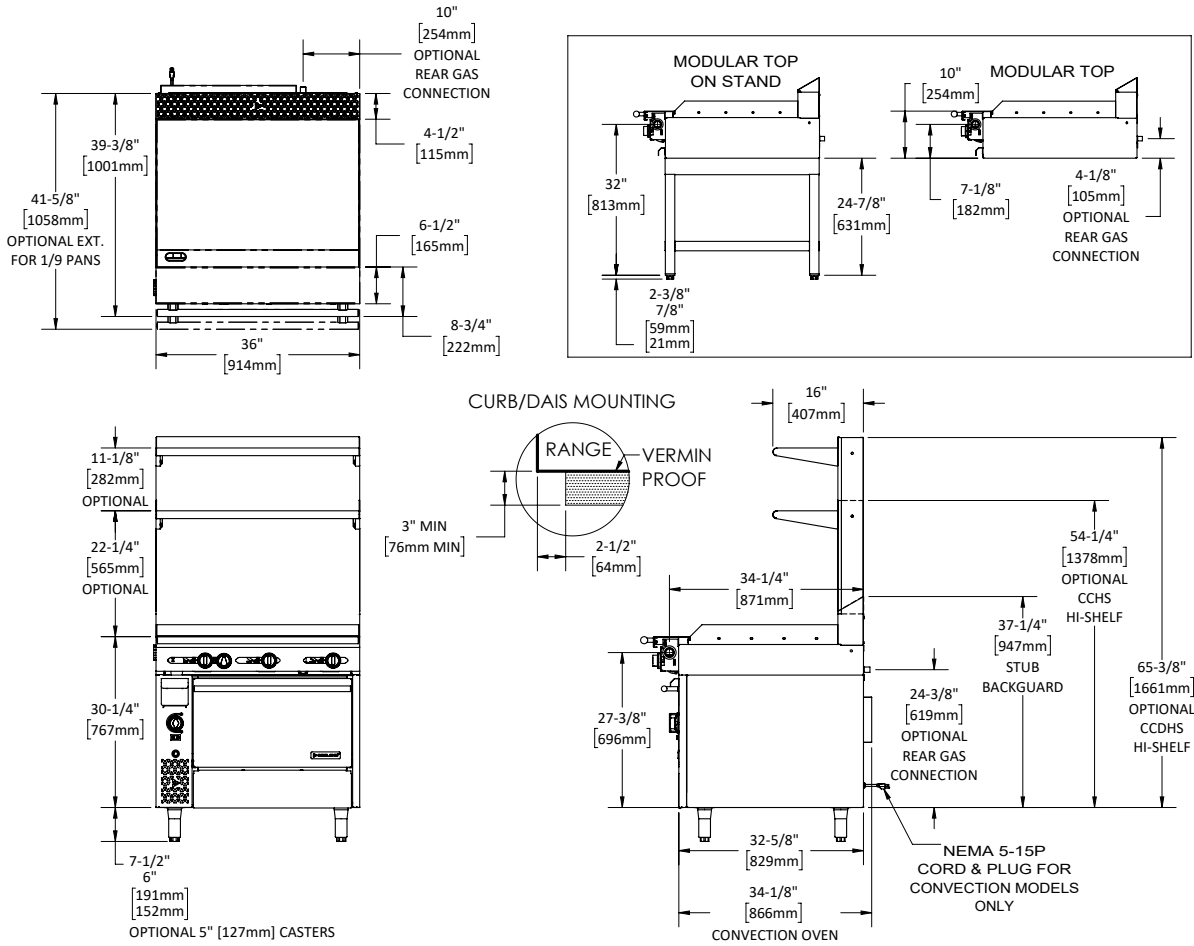

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping		Individual Burner Ratings (BTU/h)					
				Cu Ft	lbs/kg	Burner	NAT.	PRO.			
C36-1R	36" Manual Valve Control Griddle Top - w/Standard oven	130,000	125,000	53	706/320	Griddle	30,000	30,000			
C36-1C*	36" Manual Valve Control Griddle Top - w/Convection oven	127,000	125,000	53	706/320	Standard Oven	40,000	35,000			
C36-1S	36" Manual Valve Control Griddle Top - w/Storage Base	90,000	90,000	53	527/239	Convection Oven	37,000	35,000			
C36-1M	36" Manual Valve Control Griddle - w/Modular Top	90,000	90,000	30	405/184	Interior Dimensions: In (mm)					
C36-1-1R	36" Thermostat Control Griddle Top w/Standard Oven	130,000	125,000	53	706/320	Product	Height	Width	Depth		
C36-1-1C*	36" Thermostat Control Griddle Top w/Convection Oven	127,000	125,000	53	706/320	Standard Oven	13-1/2(343)	26-1/4 (667)	29 (737)		
C36-1-1S	36" Thermostat Control Griddle Top w/Storage Base	90,000	90,000	53	527/239	Convection Oven	13-1/2(343)	26-1/4 (667)	25 (635)		
C36-1-1M	36" Thermostat Control Griddle Top w/Modular Top	90,000	90,000	30	405/184	Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)		
*120V 60Hz 0.6 A c/w NEMA 5-15P cord & plug							Gas Pressure			NAT.	PRO.
							Minimum Supply			7" WC	11" WC
							Manifold Operating Pressure			6" WC	10" WC
							Gas Manifold			1-1/4" NPT	
							Combustible Wall Clearance				
							Sides		Back		
							10" (254mm)		6" (152mm)		

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA

General Inquires 1-905-624-0260
 USA Sales, Parts and Service 1-800-424-2411
 Canadian Sales 1-888-442-7526
 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
 7882
 07/21

