



TEST OUR METAL®

# Holding cabinet for pizza, or other foods for delivery or display. Counter top or under counter unit available

- Stainless steel interior and exterior
- Fully framed
- All welded construction
- Insulated with 2" high density fiberglass
- Clear Lexan door and magnetic gasket is standard
- 9 removable perforated stainless steel shelves
- Electronic control with digital display
- Armor Heat™ system with temperature range 80 to 230 degrees
- Model R19GDU comes complete with 3" casters, 4" adjustable legs are available

Job: \_\_\_\_\_

Item No. \_\_\_\_\_

## Model


- R19GDU



Made in USA



MODEL #	CAPACITY	WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	VOLTAGE	WATTAGE	AMPERAGE	SHIP WEIGHT
R19GDU	9 shelves	23"	24"	38"	120	720	8	110

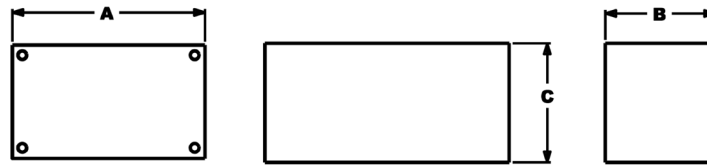

**GENERAL:** Cabinet constructed with stainless steel interior and exterior. All double wall construction, insulated with 2" high density fiberglass insulation on the top, sides, door and bottom. All exterior surfaces shall be ground and polished to a #4 finish.

**INTERNAL FRAME:** All vertical and horizontal edges framed with powder coated 1 1/2" x 1 1/2" x 1/8" angle steel, arc welded, cross braced and reinforced at all corners.

**INNER CABINETS:** Inner cabinet shall be constructed of 24 gauge stainless steel as standard. Cabinet comes with 9 removable stainless steel perforated shelves that rest on permanently mounted stainless steel rails 2" centers.

**BASE FRAME:** 1/8" formed steel base. Base shall have, four 6" x 6" x 5/16", steel plates drilled and tapped to accommodate 3" casters. The plates are fully welded to frame on all four sides.

**DOOR:** Aluminum Framed Polycarbonate Door with integral handle standard. Solid door shall be constructed of .063 aluminum and shall be reinforced. Full length hinge.

**ELECTRICAL CHARACTERISTICS:** Cabinets shall have a top mounted control panel consisting of an on/off switch with power indicator light and electronic control with digital temperature display. Each cabinet shall be heated by a 120 volt 60 cycle 1 phase Armor Heat™ system. Cabinets shall come complete with a permanently mounted 8' cord with a Nema #5-15P plug. Top of cabinet is removable for easy access to controls.

**CASTERS:** Cabinet shall have 4 heavy duty 3" casters mounted to 6" x 6" x 5/16" steel plate drilled and tapped.

## Accessories, Options, Variations

- Pass-thru door
- Left hand hinged door
- Alternate rail spacing
- 4" adjustable legs



TEST OUR METAL®

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158  
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036  
www.secoselect.com

CREATED 2016-11